



ZEBRA

Z-Select 4000T All-Temp


FEATURES

- Thermal transfer, premium, ultra smooth, paper label with an all-temp permanent acrylic adhesive
- Excellent high speed print quality
- Adhesive allows application down to -20° F
Topcoating is suitable for fanfolding
- Meets FDA 175.105 for indirect food contact requirements
- Available in white (05273RM)

MATERIAL CONSTRUCTION

Component	Description	Caliper
Facestock	Thermal transfer coated paper	3.2 mil
Adhesive	All-temp, acrylic-based	0.8 mil
Liner	40 lb. semi-bleached, kraft stock	2.5 mil
TOTAL ± 10%		6.5 mil

ADHESIVE STRENGTH

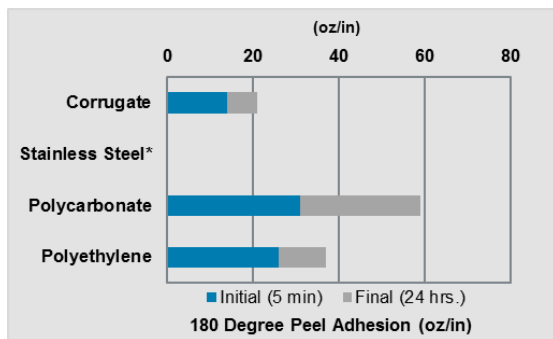

*Attraction between adhesive and surface is so great that the facestock rips.

TEMPERATURE PERFORMANCE

Minimum Application Temperature	Service Temperature	Optimal Storage Conditions
-20° F (-29° C)	-65° F to 200° F (-54° C to 93° C)	72° F (22° C) at 50% RH

Expected Exterior Life

Not recommended for outdoor use

CHEMICAL RESISTANCE

Chemical	Suggested Ribbon			
	6000	2000	6100	
Weak	Blood	●	●	●
	Body Fluid	●	●	●
	Salt Water	●	●	●
	Water	●	●	●
	Window Cleaner	●	●	●
Moderate	Alcohol	NR	NR	NR
	Ammonia	NR	NR	NR
	Bleach	NR	NR	NR
	IPA	NR	NR	NR
Harsh	Gasoline	NR	NR	NR
	Grease	NR	NR	NR
	Oil	NR	NR	NR
Extreme	Acetone	NR	NR	NR
	IR Reflow	NR	NR	NR
	MEK	NR	NR	NR
	TCE	NR	NR	NR
	Xylene	NR	NR	NR

● Recommended ● Test in Your Application NR Not Recommended

SUGGESTED APPLICATIONS

- Labeling of packaging material



- Frozen food labeling



- Compliance labeling



- Labeling of laboratory specimen containers



- Work in process



For more information, visit www.zebra.com/supplies

Product Performance and Suitability: The information contained in this document is to be used for guidance only and is not intended for use in setting specifications. All purchasers of Zebra products shall be solely responsible for independently determining if the product conforms to all requirements of their unique application.