
ZQ630 & QLn420

Mobile Printer Cart Mount Attachment



PAP


P1124562-01EN

Zebra Technologies | 3 Overlook Point | Lincolnshire, IL 60069 USA
www.zebra.com

ZEBRA and the stylized Zebra head are trademarks of Zebra Technologies Corp., registered in many jurisdictions worldwide. All other trademarks are the property of their respective owners. © 2021 Zebra Technologies Corp. and/or its affiliates. All rights reserved.


1 - Parts List & Tools Required

No.	Part Number	Description
1	P1125654	WING NUT, 5/16-18
2	P1125656	SPLIT LOCK WASHER, 5/16-18
3	P1122356	U-BOLT PLATE
4	P1122351	ZQ630 BAR MOUNT LOCATOR
5	P1122352	ZQ630 MOUNTING PLATE
6	P1122357	U-BOLT SQUARE, 5/16”-18,THD
7	P1078133	SCREW, 6-32x7/16”L,PH,SS PH1
8	P1122350	ZQ630 ADAPTER PLATE

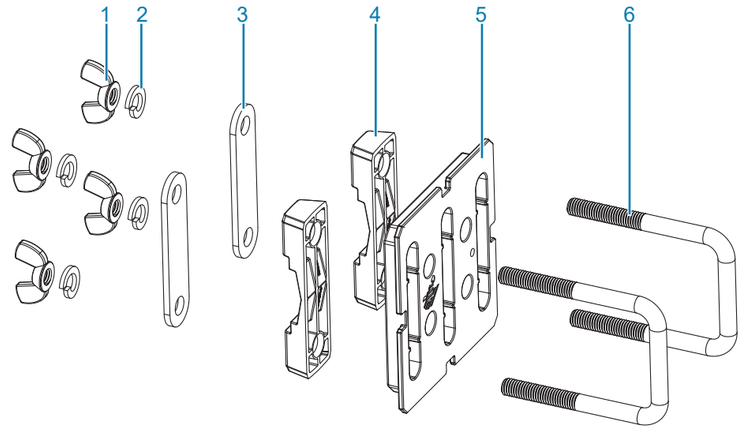


2 - Assembly


1. Insert the two U-bolts into the outside slots on the mounting plate. The U-bolts should sit flush against the mounting plate.

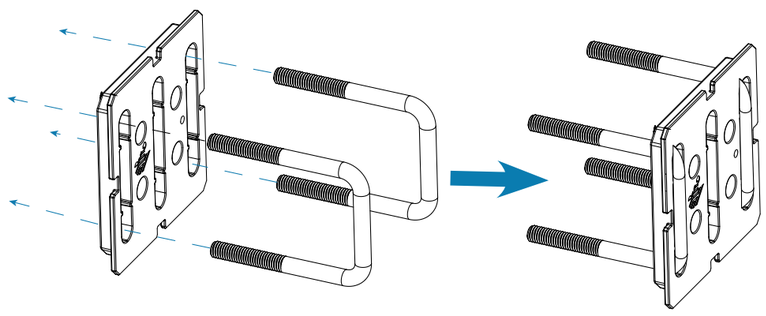

2. Insert the U-bolts into the two bar mount locators.

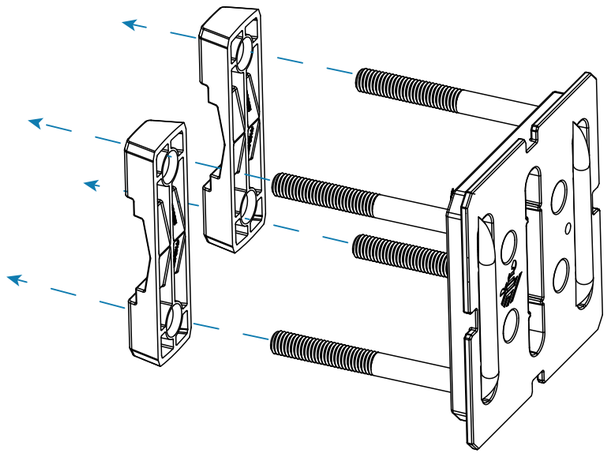


3. Install the mounting plate, U-bolts, and bar mount locators onto the handle of a cart.
4. Slide two U-bolt plates over the U-Bolts until they sit flush against the opposite side of the cart handle.

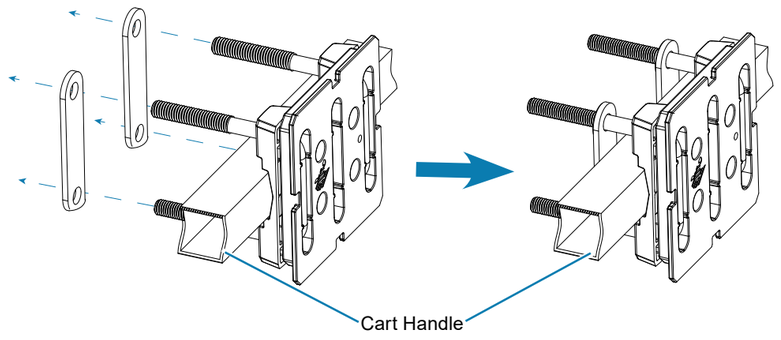

NOTE: The cart mount will fit on square or round cart handles up to 2 in. in height using the bar mount locators. The bar mount locators are not needed for square cart handles over 1.5 inches.


2 - Assembly (cont.)

5. Insert the lock washers onto the U-bolts until they sit flush against the U-bolt plates.
6. Twist the wing nuts onto the threaded end of the U-bolts until they are secured tightly against the lock washers.

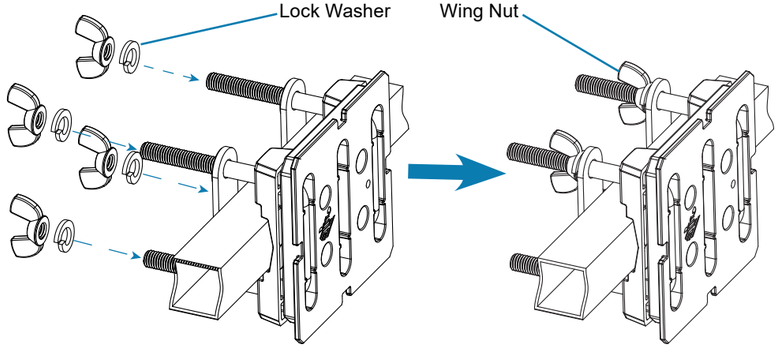


3 - Installing the Printer

1. Place the ZQ630 adapter plate over the mounting holes on the back of the printer.
2. Use a #1 Phillips driver to install the four screws which secure the adapter plate to the printer.

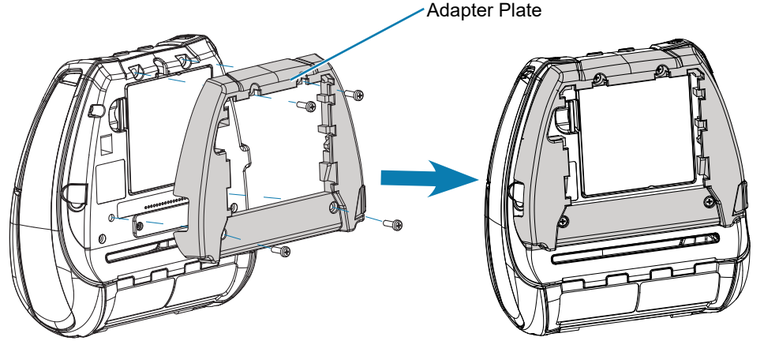


3. Slide the adapter plate over the mounting plate until it clicks into place to secure the printer to the cart mount assembly.

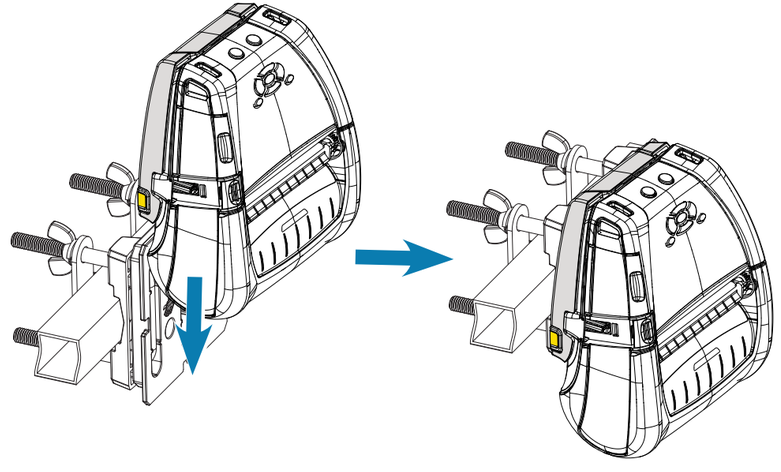

NOTE: The printer can be installed onto any of the four sides of the mounting plate in different horizontal and vertical orientations.

4 - Removing the Printer

1. To remove the printer from the cart mount assembly, press the release button on the side of the adapter plate.

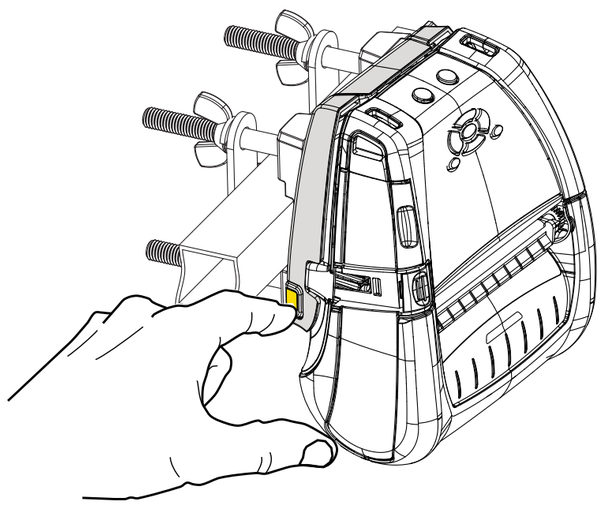

2. Lift to detach the printer from the mounting plate.

