


MC93

Charge Only Cup Conversion



Installation Instructions

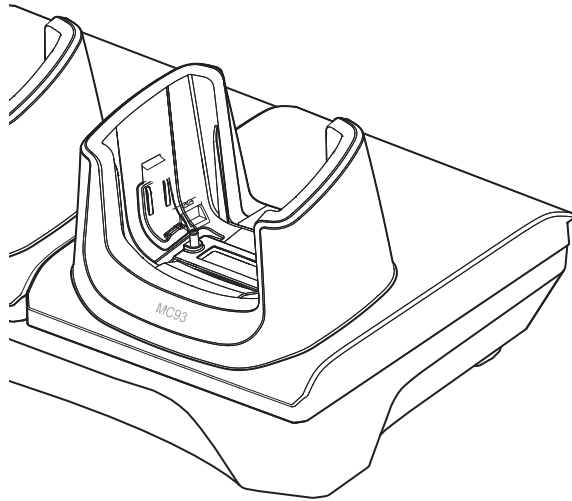


MN-004756-01EN-P

① Cup removal




CAUTION-ESD: This rework activity must be performed by the qualified technician or engineer in an ESD safe workstation. The technician or engineer must wear a grounded ESD strap.


1. Remove the AC power from the cradle.
2. Remove the screw securing the charge only cup to the cradle using a Phillips screwdriver.

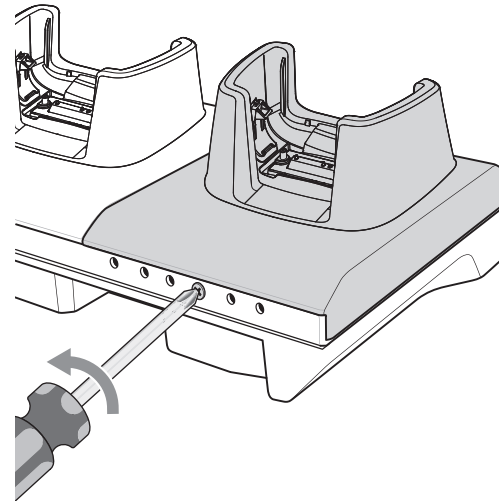

3. Slide the charge only cup forward and lift.

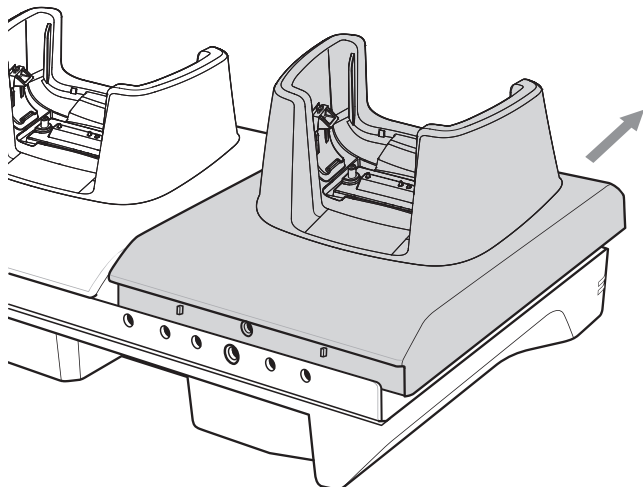


4. Disconnect the charge only cup cable from the connector.

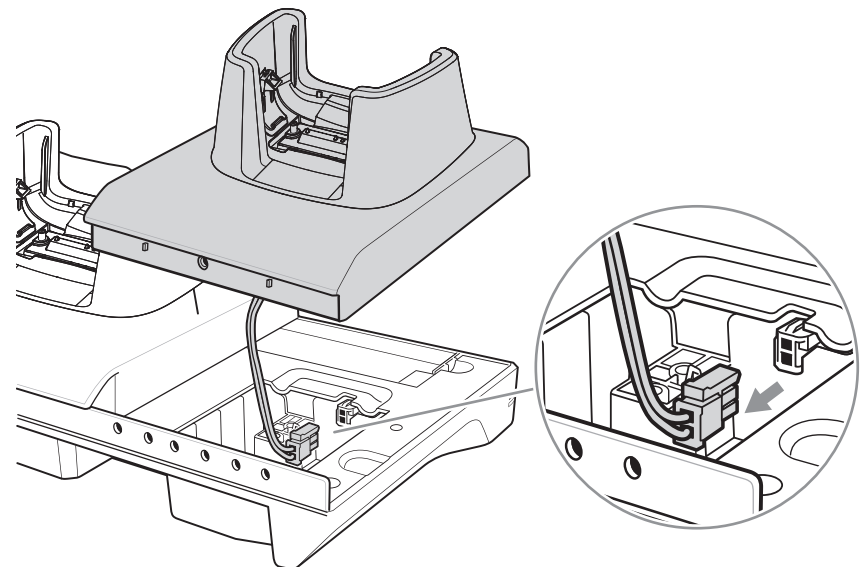


② Cup installation


5. Connect the new charge only cup cable to the connector.

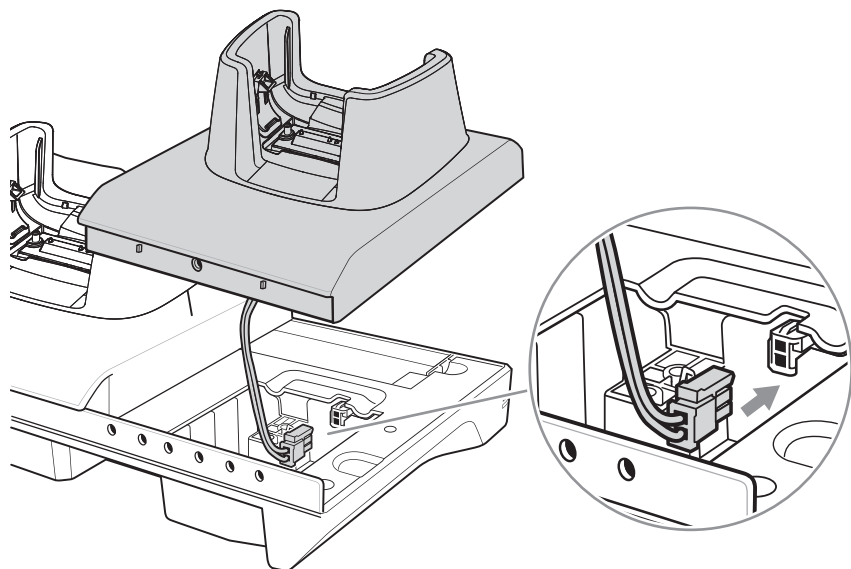

6. Align the new charge only cup with the cradle and slide the ethernet cup back.

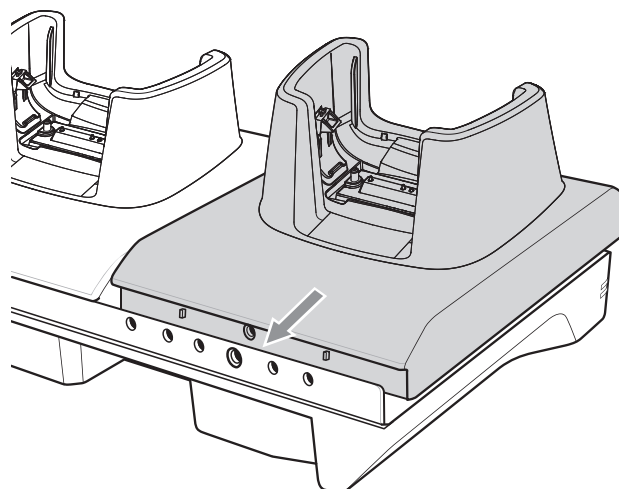

7. Using a Phillips screwdriver, secure the new charge only cup to cradle with screw.

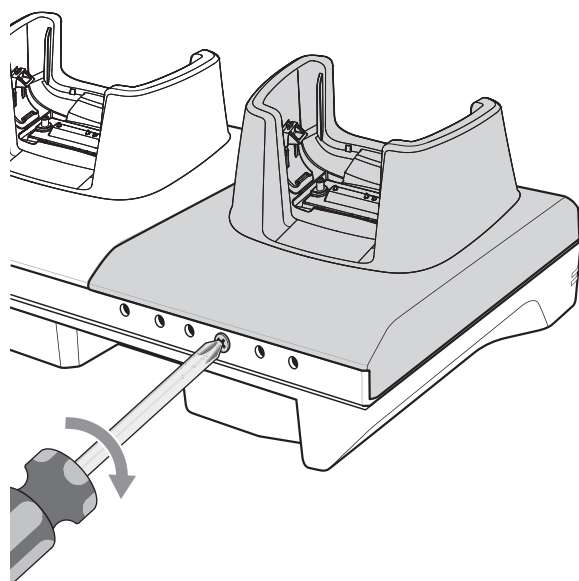

i Support and Information



Contact Zebra.
zebra.com/contactsupport



View Quick Answers and Knowledge Base.
zebra.com/knowledge



Learn about product patent information.
ip.zebra.com



Join Community Connection
of Zebra users and ambassadors.
zebra.com/supportcommunity



Zebra Technologies | 3 Overlook Point | Lincolnshire, IL 60069 USA
zebra.com
ZEBRA and the stylized Zebra head are trademarks of Zebra Technologies Corp., registered in many jurisdictions worldwide.
All other trademarks are the property of their respective owners.
© 2023 Zebra Technologies Corp. and/or its affiliates. All rights reserved.