

ADPTR-TC2L-USBC-01

Installation Guide




This guide describes inserting and removing a device from the adapter cup (ADPTR-TC2L-USBC-01), and removing the shim from the adapter cup.



NOTE: If the device has a Rugged Boot, ensure the shim is removed from the adapter cup. See Shim Removal for shim removal instructions.


Device Insertion

1. Insert the device into the adapter cup until the cup snaps onto the sides of the device.

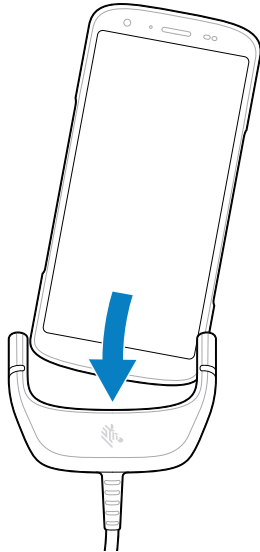

Device Removal


1. Push the tab outward to release the device from the cup.

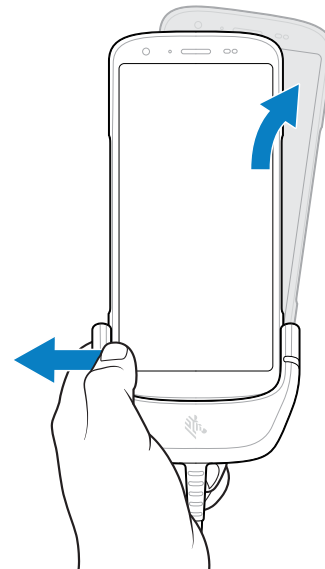


2. Remove the device from the cup.

Shim Removal

1. Push the shim's tab inward and lift the shim upwards to release the shim on one side.

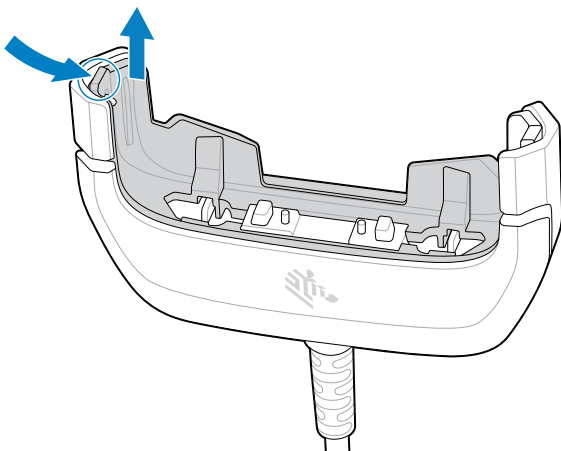

2. Repeat on the other side.

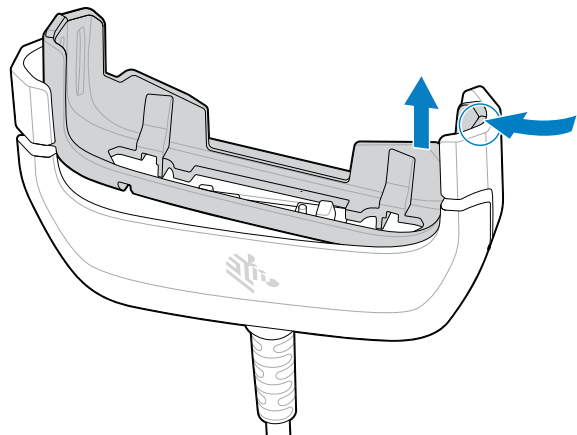

3. Remove the shim from the adapter cup.