Zebra Services Agent

User Guide

MN-005031-05EN Rev. A

Zebra Technologies | 3 Overlook Point | Lincolnshire, IL 60069 USA
zebra.com

Copyright

2026/10/07

The Zebra wordmark and logo are trademarks of Zebra Technologies Corp., registered in many jurisdictions worldwide. All other trademarks are the property of their respective owners. ©2026 Zebra Technologies Corp. and/or its affiliates.

Information in this document is subject to change without notice. The software described in this document is furnished under a license agreement or nondisclosure agreement. The software may be used or copied only in accordance with the terms of those agreements.

For further information regarding legal and proprietary statements, please go to:

SOFTWARE: zebra.com/informationpolicy.
COPYRIGHTS: zebra.com/copyright.
PATENTS: ip.zebra.com.
WARRANTY: zebra.com/warranty.
END USER LICENSE AGREEMENT: zebra.com/eula.

Terms of Use

Proprietary Statement

This manual contains proprietary information of Zebra Technologies Corporation and its subsidiaries ("Zebra Technologies"). It is intended solely for the information and use of parties operating and maintaining the equipment described herein. Such proprietary information may not be used, reproduced, or disclosed to any other parties for any other purpose without the express, written permission of Zebra Technologies.

Product Improvements

Continuous improvement of products is a policy of Zebra Technologies. All specifications and designs are subject to change without notice.

Liability Disclaimer

Zebra Technologies takes steps to ensure that its published Engineering specifications and manuals are correct; however, errors do occur. Zebra Technologies reserves the right to correct any such errors and disclaims liability resulting therefrom.

Limitation of Liability

In no event shall Zebra Technologies or anyone else involved in the creation, production, or delivery of the accompanying product (including hardware and software) be liable for any damages whatsoever (including, without limitation, consequential damages including loss of business profits, business interruption, or loss of business information) arising out of the use of, the results of use of, or inability to use such product, even if Zebra Technologies has been advised of the possibility of such damages. Some jurisdictions do not allow the exclusion or limitation of incidental or consequential damages, so the above limitation or exclusion may not apply to you.

About This Guide

This guide provides comprehensive instructions for using the Zebra Services Agent (ZSA), a versatile mobile application designed to enhance the functionality of Zebra mobile computers running the Android platform.

NOTE: The **Zebra Services Agent (ZSA)** application has transitioned to a new package name. To ensure system compatibility and continued support, complete the following steps:

1. **Uninstall** the older application version (Package Name: `com.zebra.zsa`).
2. **Install** the updated ZSA application version (Package Name: `com.zebra.servicesagent`) on your device.

1. **VIQF Smart Battery Health**: This feature monitors the battery health of Zebra devices and provides alerts and detailed information about the battery's status.
2. **Drop Detection**: This feature uses the device's accelerometer sensor and gyroscope values to detect and notify users when a device falls. The detection is based on the configured sensitivity value, which administrators can adjust according to specific operational needs.
3. **Data Collection**: This feature supports the collection of machine data from non-Zebra devices and uploads it to the server for further analysis.
4. **Diagnostic Tool**: A utility designed to test the hardware functionality of devices, perform various diagnostic tests, and upload the results for troubleshooting. Administrators can trigger tests instantly or schedule them periodically to monitor and improve device health.
5. **Application Configuration**: The ZSA application allows the configuration of other applications, such as Zebra Data Services (ZDS) and Wireless Insight, on Zebra devices.
6. **Device Actions**: Enables remote log collection for streamlined troubleshooting and allows sending messages to one or multiple devices for direct communication. It also provides real-time outdoor location tracking, ideal for logistics and field operations to monitor and manage assets efficiently.
7. **Proactive Device Monitoring**: This feature provides real-time alerts to users when devices encounter the events below. A dialog displays and allows users to trigger diagnostics and verify device health.
   - **Severe Device Drop**
   - **Device Overheated**
   - **Device Over Cold**
   - **Wi-Fi Disconnections**
   - **Frequent Device Reboot**
   - **Bluetooth Disconnections**
8. **Log Collection for Non-Zebra Devices**: Expanded ZSA capabilities to collect application logs from non-Zebra devices, broadening its scope to identify issues effectively.
9. **ZSA as a Mediator**: This enables receiving data from other apps and sending it to the server. With this, ZSA works as a mediator between any app and server to upload data.

These make the ZSA a powerful tool for managing Zebra and non-Zebra devices, each with specific features tailored to maximize efficiency and performance.

Functional Overview

The ZSA mobile application includes several important modules, such as battery health verification, function diagnostics, and drop detection, ensuring comprehensive device monitoring.


- System Configuration
- VIQF Smart Battery Health
- Drop Detection
- Data Collection
- Diagnostic Tool
- Application Configuration
- Device Actions
- Proactive Device Monitoring
- ZSA as a Mediator

System Configuration

The System Configuration module serves as the foundation for managing key operational settings of the ZSA application. It allows administrators to enable or disable the entire application, set log levels for efficient monitoring and debugging, and configure file and data upload processes, including retry mechanisms for failed uploads. Additionally, it provides control over the data collection module, allowing for the enabling or disabling of it as needed. This feature is also enhanced with log collection in a file for analysis of the use of the application.

Log Collection in a File

This function enables the collection of application logs from non-Zebra devices, broadening its scope to notify of issues effectively. By default, it is disabled; Admin can enable it via CTL or Managed Configuration. Logs can be exported from the settings screen of the ZSA.

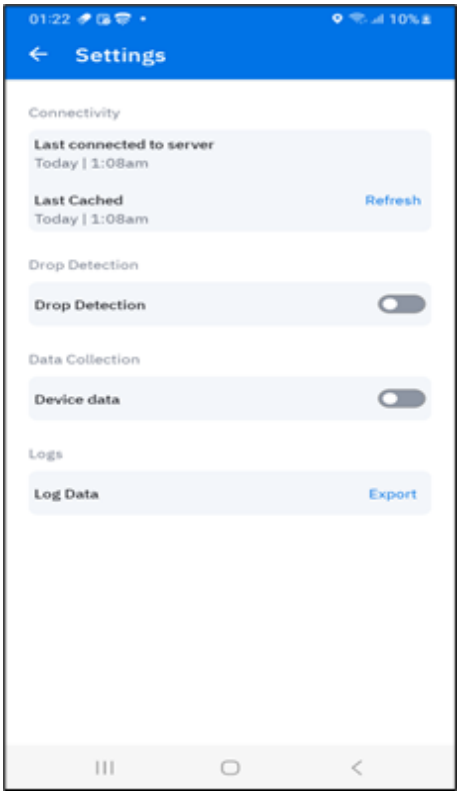

NOTE: This feature is configured using Managed Configuration via MDM or VIQ and is applicable to Zebra and non-Zebra devices.

Table 1 System Configuration Parameters

Parameter Key	Description	Default Value	Min	Max
Enable/Disable of ZSA	Enable or disable ZSA.	`true`		
Configuration of the log level for ZSA	Specifies the logging level `0` = Info `1` = Debug `2` = Sensitive	`1`	`0`	`2`
Log collection in a file	Keeps application logs in a file for analysis.	`false`		
File upload URL	URL where device logs are uploaded for analysis.	`https://z4z.t.eu.fs.viq.zebra.com/systemconfig-service/api/v1/public/upload-scan-results`		
File upload retry count	The number of retry attempts for uploading files in case of failure.	`3`	`1`	`5`
File upload retry interval in minutes	Time interval (in minutes) between retry attempts for file uploads.	`15`	`15`	`60`

Table 1 System Configuration Parameters (Continued)

Parameter Key	Description	Default Value	Min	Max
Data upload URL	URL for uploading analytics data.	`https://analytics.zebra.com/client2`		
Data upload interval in minutes	Interval (in minutes) for data upload cycles.	`1440`	`30`	`1440`
Enable/Disable of data collection	Boolean indicating whether device data collection is enabled.	`false`		
Allow user to toggle data collection	Boolean toggle for enabling/disabling device data collection.	`true`		
Account Number	Account ID received from the Zebra onboarding team. Mandatory for Non-zebra devices.			


VIQF Smart Battery Health


ZSA is designed to have real-time **Alert on Device** capabilities for VisibilityIQ Foresight (VIQF) and Proactive Battery Replacement (PBR) Services. Admin can disable this module if bad battery alerts are not needed for the device.

NOTE: This feature is configured using Managed Configuration via MDM or VIQ and is applicable only to Zebra devices.

Alert capabilities for VIQF:


- Identify VIQF **Replace Now** batteries with no useful life left through on-device alerts for battery status.
- The device generates an alert message whenever it is swapped with a faulty battery. The app checks for cold battery swaps (via device reboot) and warm swaps (without device reboot).
- Highlights battery health and battery details on the app.

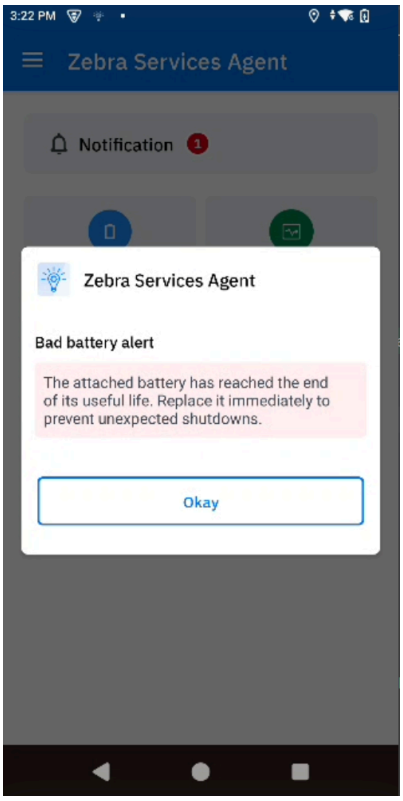

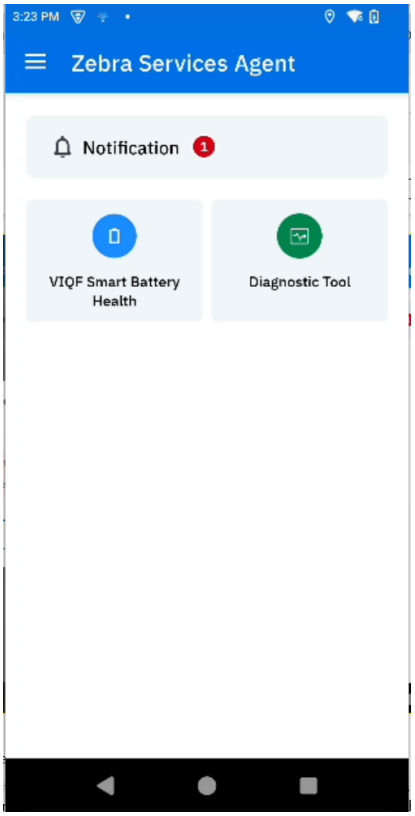

Alert capabilities for VIQF smart battery health Services:

- Identify faulty batteries for which a replacement is sent to the customer's location. There is a 20-day period before an alert displays to allow the replacement battery to reach the customer's location.
- The device generates an alert message whenever it is swapped with a faulty battery. The app checks for cold battery swaps (via device reboot) and warm swaps (without device reboot).
- The device displays an alert message when the user disconnects the charger due to bad battery health.
- Highlighting battery health and battery details on the app.

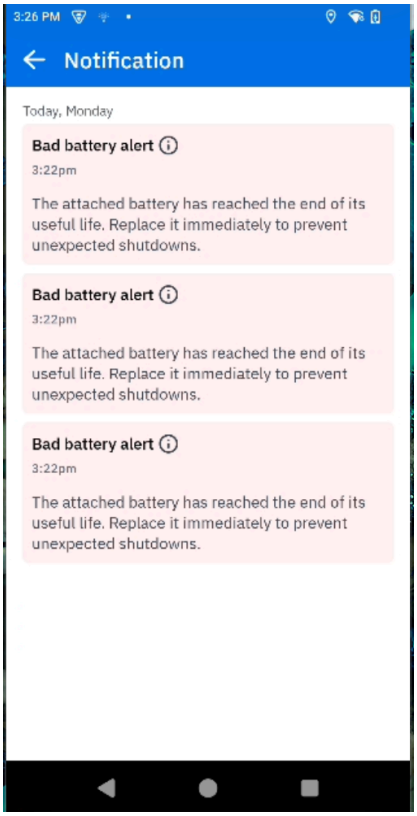

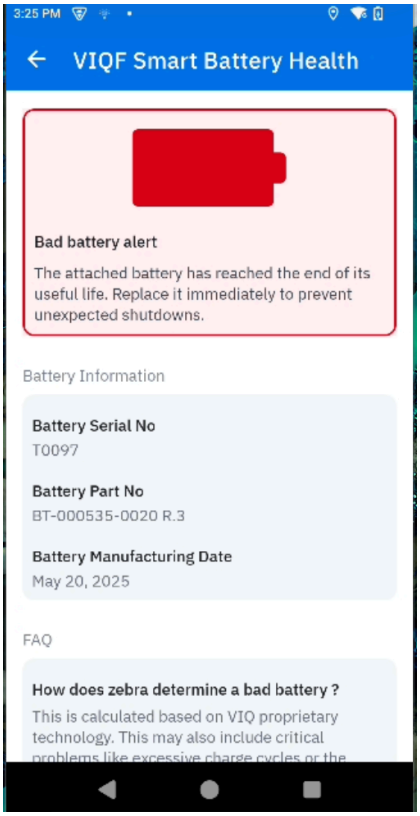


Table 2 VIQF Smart Battery Health Configuration Parameters

Parameter Key	Description	Default value	Min	Max
Enable/Disable PBR configuration	Boolean indicating whether PBR is enabled.	`true`		
Custom message to show in the notification	Custom message displayed for bad battery alerts.	Default message defined by Zebra.		
Alert the user of a bad battery through a notification or Alert Dialog	Specifies the alert format displayed to the user: `0` = Notification `1` = Alert Dialog with **OK** button `2` = Alert Dialog with **OK** **Need Assistance** button	`1`	`0`	`2`
Block device usage	Boolean indicating whether the device should be blocked due to the alert.	`false`		

Drop Detection

The Drop Detection module of the Zebra Services Agent (ZSA) application uses the device accelerometer and gyroscope sensors to detect when a device is dropped. When a drop event is detected, the application alerts the user and automatically uploads event data to the server.


NOTE: This feature is configured using Managed Configuration through MDM or VIQ and is applicable to Zebra and non-Zebra devices.


New Features:

Enhanced Alert Options: In addition to standard notifications, users can now receive alerts via dialog boxes when a drop is detected. This dialog not only informs the user of the drop but also provides assistance or guidance if required, ensuring a more interactive and responsive user experience.

Drop Sensitivity Levels: Added the ability to configure drop sensitivity with predefined levels such as High, Medium, and Low.

These enhancements offer users flexibility in how they receive alerts and ensure that they are promptly informed about device drops, with support readily available if needed. If the Admin provides access, the user can enable or disable drop detection from the settings screen.

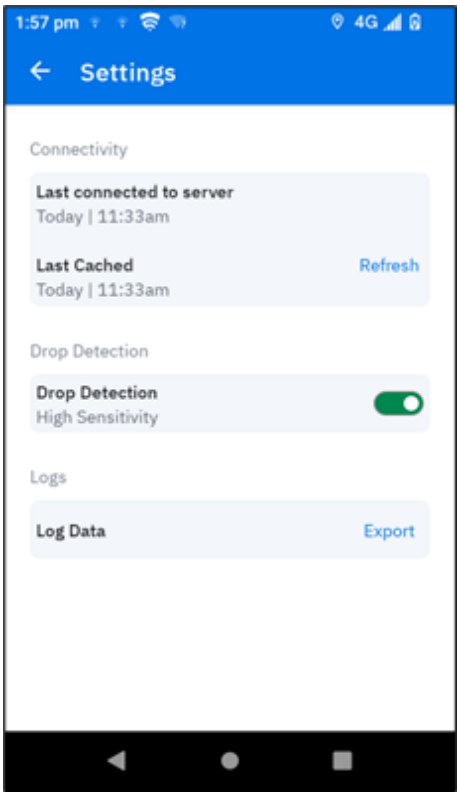

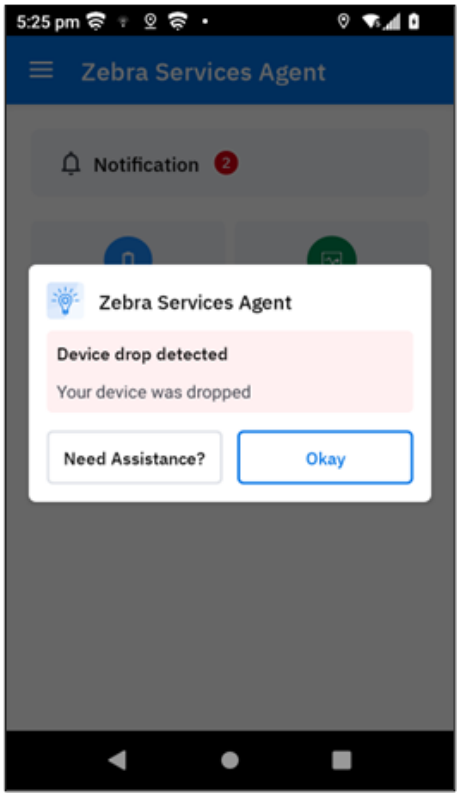

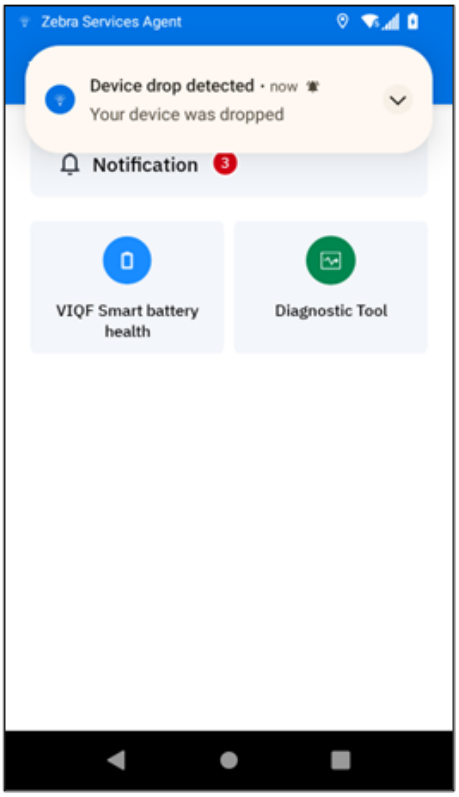


Table 3 Drop Detection Parameters

Parameter Key	Description	Default Value	Min	Max
Enable/Disable of drop detection	Boolean indicating whether drop detection is enabled.	`false`		
Drop sensitivity level	Specifies the sensitivity level: `0` = High `1` = Medium `2` = Low	`1`	`0`	`2`
Alert the user of a device drop through a notification or Alert Dialog	Specifies the alert format displayed to the user: `0` = Notification `1` = Alert Dialog with **OK** button `2` = Alert Dialog with **OK** **Need Assistance** button	`0`	`0`	`2`
Allow user to toggle drop detection	Boolean toggle for enabling/disabling drop detection.	`true`		

Data Collection

The Data Collection module of the Zebra Services Agent (ZSA) application gathers operational data to support device management and analytics. Administrators can configure collection intervals and scheduled uploads, and details are provided in the configuration table.

NOTE: This feature is configured using Managed Configurations through Mobile Device Management (MDM) and applies only to non-Zebra devices. By default, data collection is disabled. When an administrator enables data collection, all default data categories begin capturing data. Administrators can individually enable or disable non-default collection categories.

This module provides data management capabilities, empowering administrators with detailed insights while offering the flexibility to adapt data collection practices as required. This module collects various types of information, including:


Table 4 Data Collection Categories


Collection Name	Description	Default State
Battery Information	Collects details about battery health and status.	Enabled
Device Information	Captures specifications and operational status of the device.	Enabled
Application Information	Collects comprehensive data regarding installed applications, including events such as installations, uninstallations, upgrades, and downgrades of any application on the device.	Enabled
Application Usage	Aggregates data analysis and usage patterns of applications to provide insights into device and application performance.	Enabled
WLAN Information	Captures WLAN-related data, including when the device connects to or disconnects from Wi-Fi networks.	Disabled
GPS Stats	Collects the device location every 15 minutes and uploads the last collected location every hour.	Disabled
Battery Events	Captures key battery-related events, such as low battery, charger connect/disconnect, battery swap, screen on/off, and device shutdown.	Enabled
Bluetooth Events	Collects data whenever a device connects to or disconnects via Bluetooth.	Enabled
Low RAM Events	Captures data when low RAM conditions are detected on the device.	Disabled

Table 4 Data Collection Categories (Continued)

Collection Name	Description	Default State
RAM Stats	Collects and records the device RAM space status every hour.	Enabled
Flash Stats	Captures the flash memory status of the device every hour.	Enabled
Utilization	Records data about device uptime, categorized based on the hour of the day.	Enabled
Geofencing	Captures data when the device moves out of a defined geofencing radius.	Disabled
WWAN Information	Collects device SIM card information, such as network, operator, and signal level.	Enabled
Screen Brightness	Captures the device screen brightness level at regular intervals.	Enabled
Network Stats	Collects network statistics and data transmission metrics.	Enabled
WLAN Stats	Aggregates WLAN connection statistics and performance metrics.	Enabled
WLAN Events	Captures specific WLAN-related events and state changes.	Enabled
Storage Stats	Records device storage space utilization and status.	Disabled
Device Usage	Tracks device usage patterns and uptime statistics categorized by time of day.	Enabled
Feature Usage	Collects data regarding feature utilization and feature-specific events.	Enabled
Doze Mode	Captures device doze mode state changes and transitions.	Disabled
Network Latency	Measures and records network latency and connectivity delays.	Disabled
Scanner Info	Collects information about barcode scanner devices. Supported only on Datalogic or Honeywell devices with scanners.	Enabled

The details of the last collected and uploaded data are accessible through the settings screen. Users can view this information and, if granted access by the administrator, can enable or disable data collection using the toggle button provided.

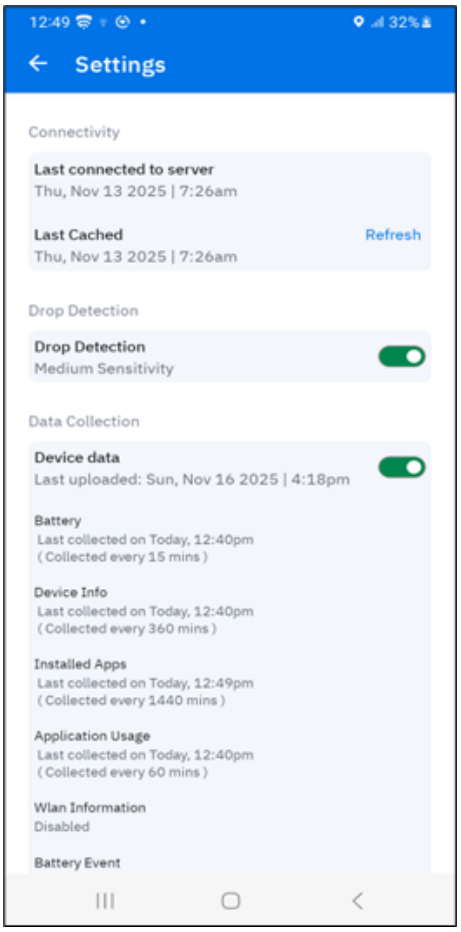

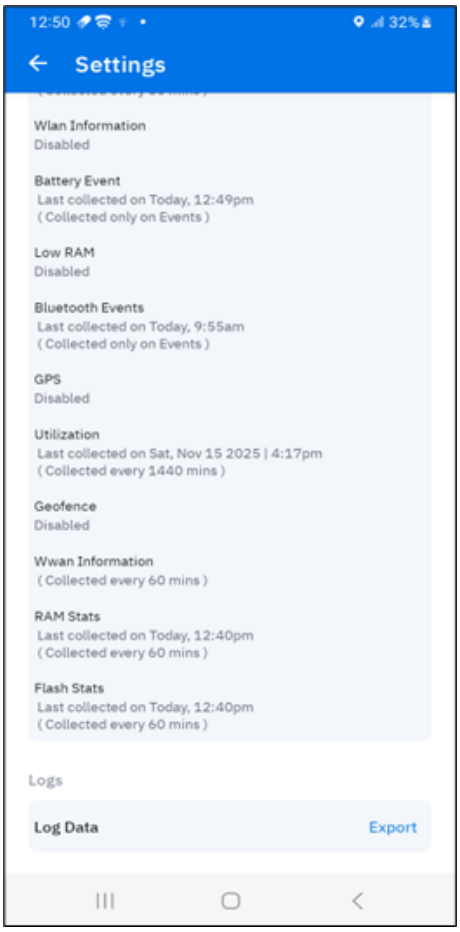

Diagnostic Tool

This module of the ZSA mobile application provides tests that verify the device's hardware functionality to determine the system's health and its result. When necessary, the Zebra Help Desk uses this tool to troubleshoot device issues, using the results to determine the ideal steps for resolution. This functionality is preferred for quickly addressing device problems, increasing worker productivity, and reducing device downtime and unnecessary returns to the Zebra Repair Center.

Support for Non-Zebra Devices: The Device Diagnostic Tool (DDT) is now extended to non-Zebra devices, enabling advanced diagnostics across a wider range of hardware and increasing its versatility.

Immediate and Scheduled Testing: Admin can trigger tests immediately or schedule them as one-time or recurring tests, ensuring proactive and efficient device health monitoring.

Table 5 Diagnostic Test Support Matrix

Diagnostic Tool Tests	Zebra Support	Non-Zebra Support
Scanner	Yes	Partial (Supported only on Datalogic and Honeywell devices)
Button	Yes	Yes
Touch Screen	Yes	Yes

Table 5 Diagnostic Test Support Matrix (Continued)


Diagnostic Tool Tests	Zebra Support	Non-Zebra Support
Bluetooth	Yes	Partial (Supported only on Android 12 and below versions)
Wi-Fi	Yes	Partial
Battery	Yes	Partial
WWAN	Yes	No
Audio	Yes	Yes
SD Card	Yes	Yes
USB	Yes	Yes
Network	Yes	Yes
Keyboard	Yes	Yes
Camera	Yes	Yes

New Enhancements:


DDT execution on connected to charge: When the administrator enables this feature, the system monitors battery status and initiates scheduled Device Diagnostic Tool (DDT) tests only when the device is connected to a charger.

NOTE: This feature can be configured using Managed Configuration through MDM or VIQ and is applicable to Zebra and non-Zebra devices (partially).

1. Users access the **Diagnostic Tool** module from the home screen of the ZSA mobile application. The main screen of this module displays a list of tests that help identify the device's system health and determine whether it needs to be sent to the Zebra Repair Center.

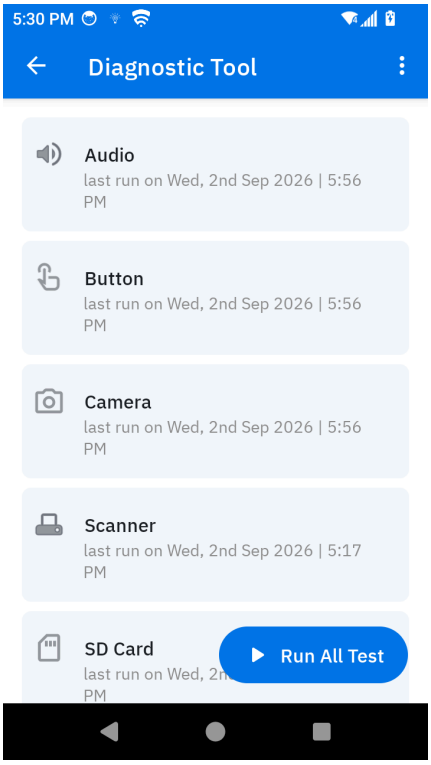


2. The **Run All Test** runs all the listed tests in sequence to verify the system's health and simultaneously generates a result report.

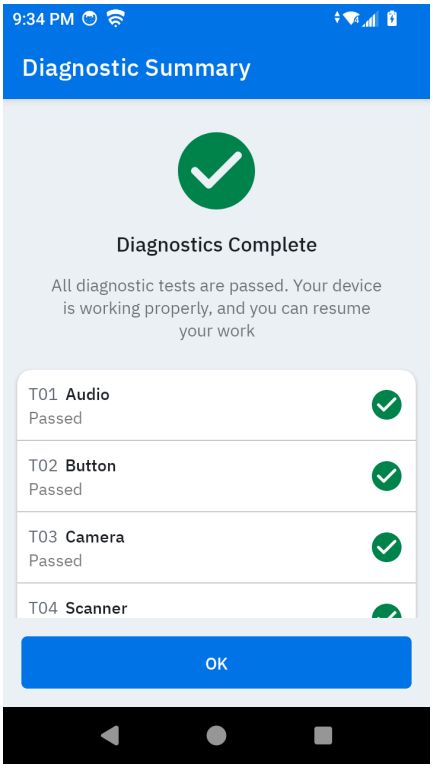


3. Users can perform individual tests to verify if a specific device function works correctly. After each test, the results are saved to a file and uploaded to the designated FTP network. The outcome of the test is also displayed on the test result screen.

   Below is an example of a **Bluetooth** test.


   - Click **Run Test**.

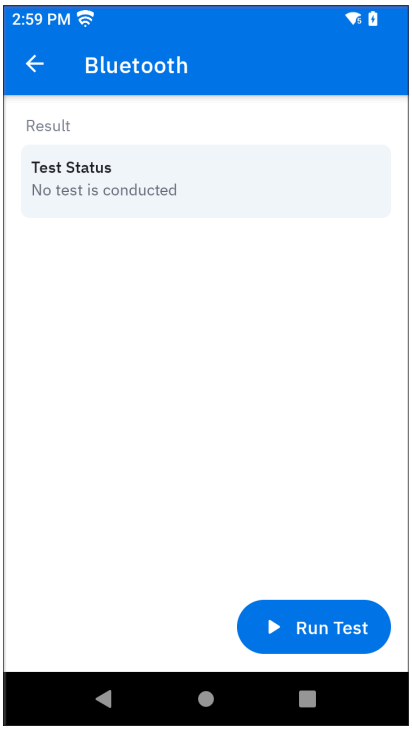


   - The **Testing in Progress** page displays.

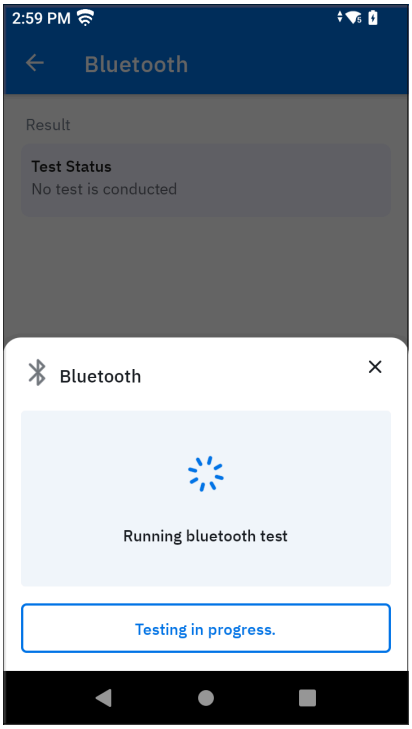


- After completing the test, the **Result** page displays.

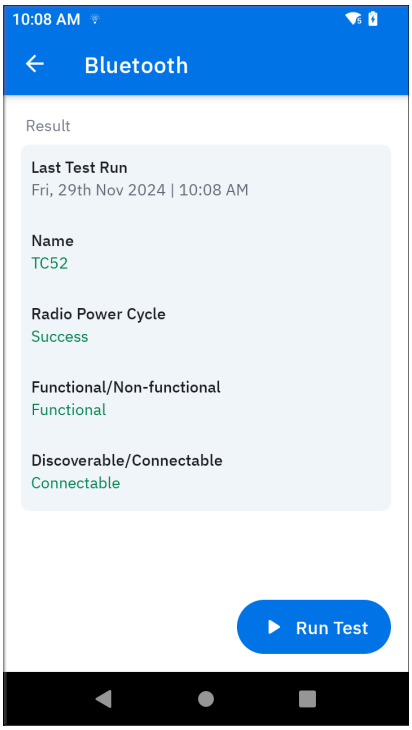

- Users can cancel the test while it is in progress. A message prompts for confirmation with options for **Yes** or **No.**

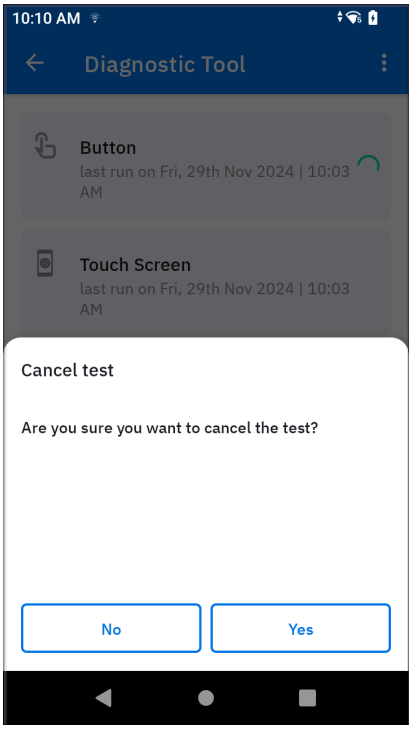


4. The **Diagnostic Tool** module includes additional features, such as **Settings**, **Configure**, **Test Scheduler**, **Upload** and the option to enable or disable tests.

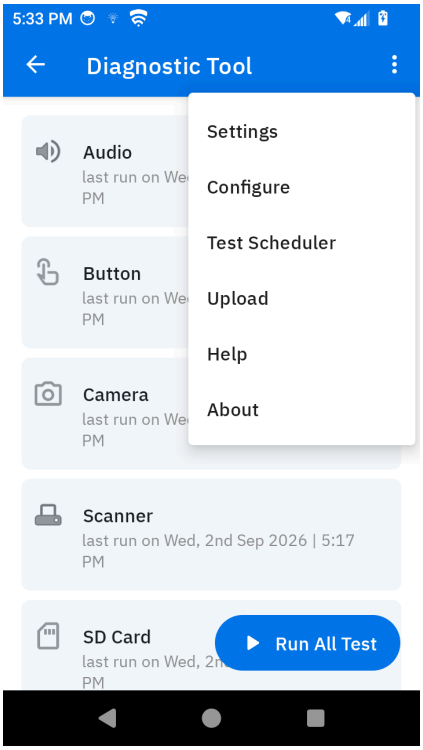


5. The **Settings** feature allows users to import diagnostic tool configurations from a configuration XML file, export the current configuration to a file for later use, or use the same configuration


on different devices. The user can also configure the FTP server to upload test logs to a specific server.

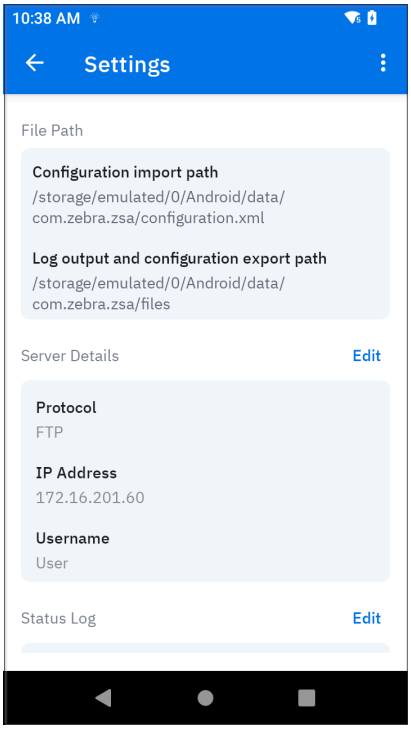


6. The **Configure** feature provides different required configurations related to performing any test. This feature allows users to enable or disable tests and specify the time interval allocated to finish the test. The user can also view a list of sub-tests and enable or disable them from the configure test page.

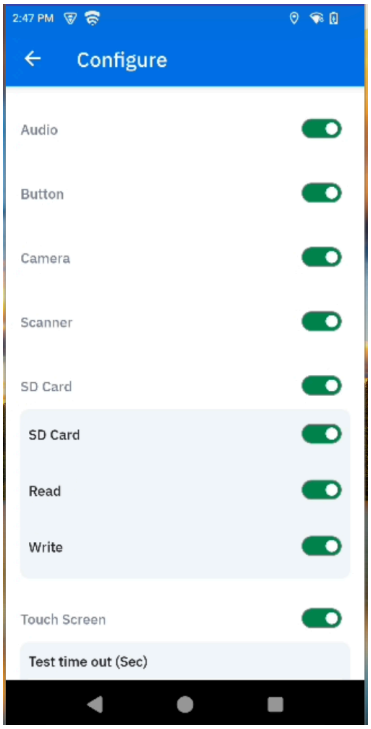


7. The **Test Scheduler** feature allows scheduling weekly tests that are automatically executed at a specific time of the day. All the schedulers are visible on the schedule tests screen, as displayed below.

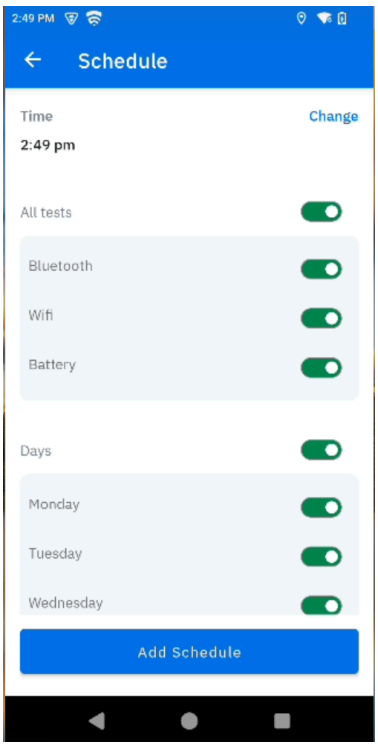


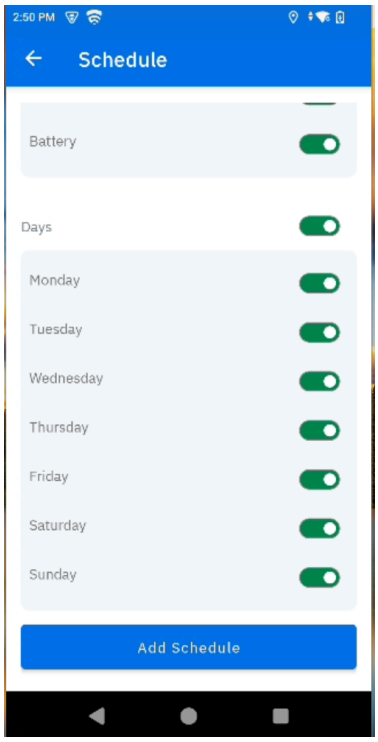

8. By selecting the **Time**, **All Tests**, and **Days** of the week, the tests are scheduled to run automatically in the background at the specified times on the chosen days.

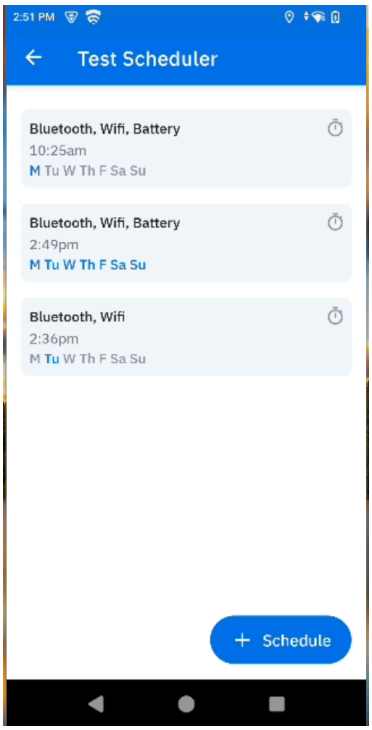

9. A new pre-alarm feature has been added to DDT tests, providing an alarm notification 15 minutes before a scheduled test. Users have the flexibility to dismiss the upcoming test directly from the notification if needed. When a test is dismissed, feedback regarding the action is automatically sent to the server for tracking and analysis.

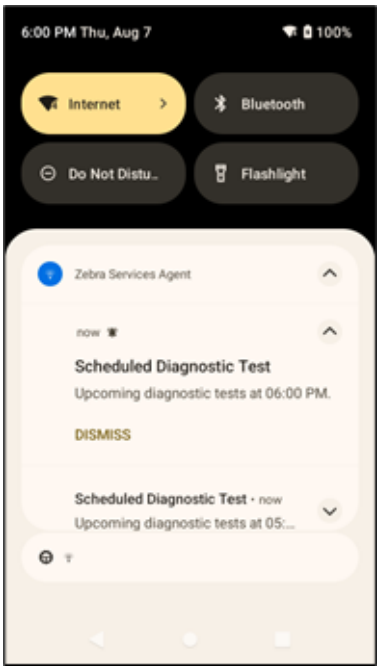

10. After completing the test, whether successful or unsuccessful, the results are saved and uploaded to the designated FTP server. Users can modify server configurations via the **Settings** feature or the **Upload** feature. The **Upload** feature allows users to manually upload data to the FTP server anytime, even without conducting tests.

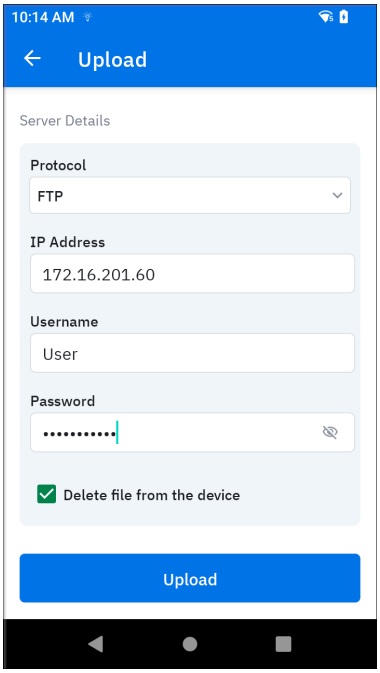


Table 6 DDT Configuration Parameters

Parameter Key	Description	Default Value	Min	Max
Enable/Disable DDT	Enable or disable the Diagnostic Tool.	`true`		
Clear DDT configurations	Whether to clear the Diagnostic Tool configuration.	`false`		
Is Device should be on charge?	Execute scheduled tests only when the device is connected to the charger	`false`		
Upload preference	Upload the log file for the condition only: `1` = Only on failure `2` = All test logs	`1/2`	`1`	`2`
Test-log retention	Action after log upload: `0` = Retain log file on device `1` = Delete log file after upload	`0/1`	`0`	`1`
Trigger DDT full suite	Triggers the full DDT test suite immediately.	`false`		
Run DDT instantly	Triggers DDT tests, which do not require user intervention immediately.	`false`		
Schedule tests on specific dates	Schedule tests based on date (in `DD-MM-YYYY` format).	`None`		
Schedule tests on specific days	Schedule tests based on days of the week (in `MON,TUE,WED` format).	`None`		
Schedule tests at a specific time	Time of the day for the test (in `HH:MM` format).	`None`		
Test Plan - System to test	Name of the test (for example, `Bluetooth`). Only non-user intervention tests.	`None`		
Test Plan – Test Day and Test Time	Specify the Day of the week for the test (for example, `Monday`) and the Time of the day for the test (in `HH:MM` format).	`None`		
Test Plan - Delivery	Specify FTP username, FTP protocol, FTP password, and FTP server IP address.	`None`		

Application Configuration

The Application Configuration Module of the ZSA mobile application is designed to provide advanced configuration capabilities for other applications on Zebra devices. This module empowers users to customize settings and optimize application functionality directly from the ZSA application, enhancing operational efficiency and device management. The module currently supports the customization of configuration settings for two specific applications:

NOTE: This feature is configured using Managed Configurations through MDM or VIQ and applies only to Zebra devices.

1. **Zebra Data Service (ZDS)**: Enables or disables ZDS using custom configurations through VisibilityIQ (VIQ) only.
2. **Wireless Insight**: Enables or disables advanced wireless logging using Mobile Device Management (MDM) or VIQ.on.

Table 7 Application Configuration Parameters

Parameter Key	Description	Default Value	Min	Max
ZDS Configuration: Payload	Encrypted data (specific to ZDS Configuration).	None		
Wireless Insight Configuration: Configuration ID	Predefined configuration profile: 1 = Start Wi-Fi Analysis 2 = Start Cellular Analysis 3 = Start Wi-Fi and Cellular Analysis 4 = Stop Wi-Fi Analysis 5 = Stop Cellular Analysis 6 = Stop Wi-Fi and Cellular Analysis	1	1	6
Wireless Insight Configuration: Custom Configuration	Accepts custom wireless configuration.	None		


Device Actions

The Device Actions Module in the ZSA mobile application offers a suite of powerful functionalities designed to enhance device management and operational efficiency. This module provides administrators with tools to interact with devices, gather valuable data, and track device locations.

- **Device Alert**:

  Administrators can display alert messages on devices either as notifications or dialogue boxes.


  NOTE: This feature can be configured through VIQ and is applicable to Zebra and non-Zebra devices.

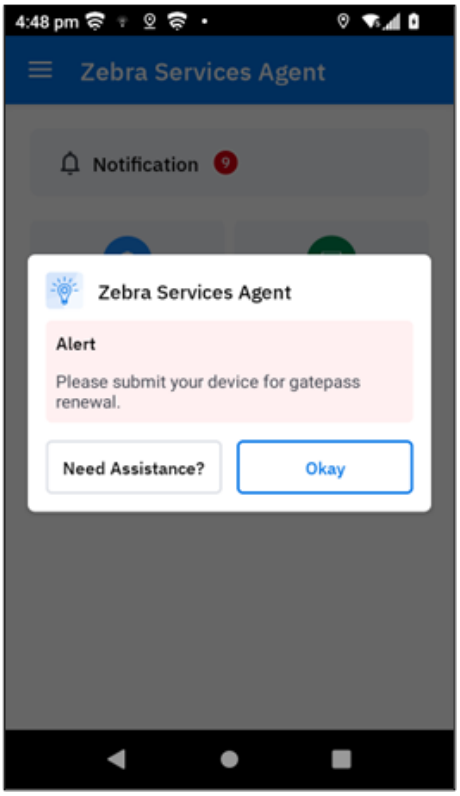

- **Collect Logs**:

  This functionality enables a one-time action to apply custom configurations to RxLogger for a specified duration. Additionally, this feature supports the inclusion of the Diagnostic Tool during the logging period.


  NOTE: This feature can be configured through VIQ and is applicable only to Zebra devices.

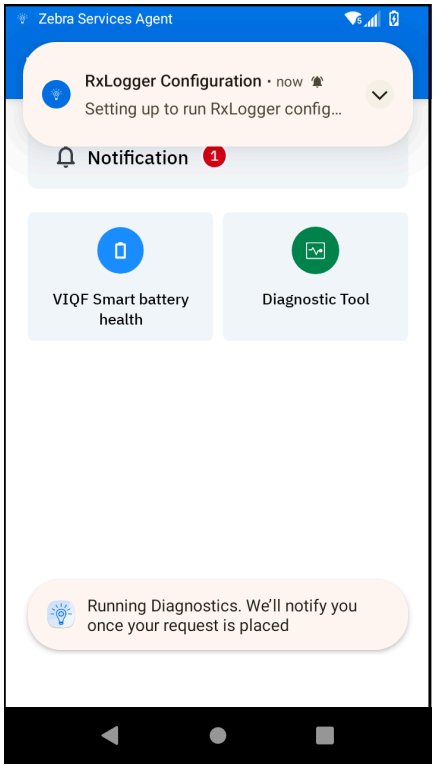

- **Outdoor Location Tracking**:

  Administrators can start or stop outdoor location tracking for a specific duration, enabling real-time monitoring of device movement. The application allows configuration of the interval for location updates, ensuring that location data is collected at a frequency suitable for operational needs and resource management. The prerequisite is that the ZSA application has granted the location permission, and the device's Location Accuracy setting is enabled.

  NOTE: This feature can be configured through VIQ and is applicable to Zebra and non-Zebra devices.

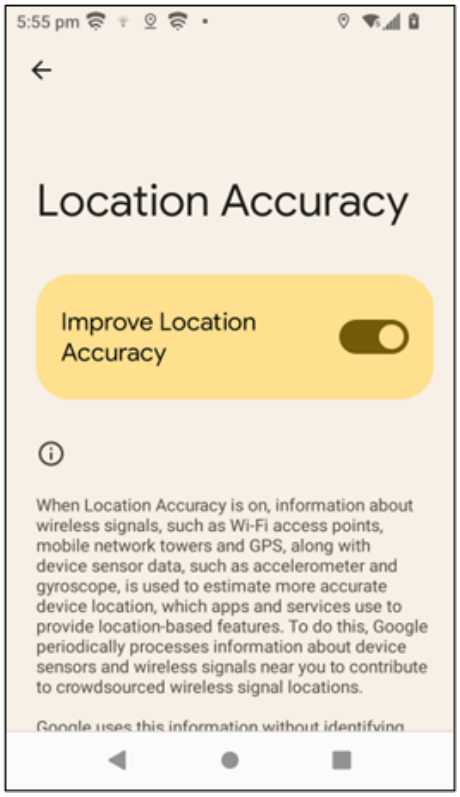

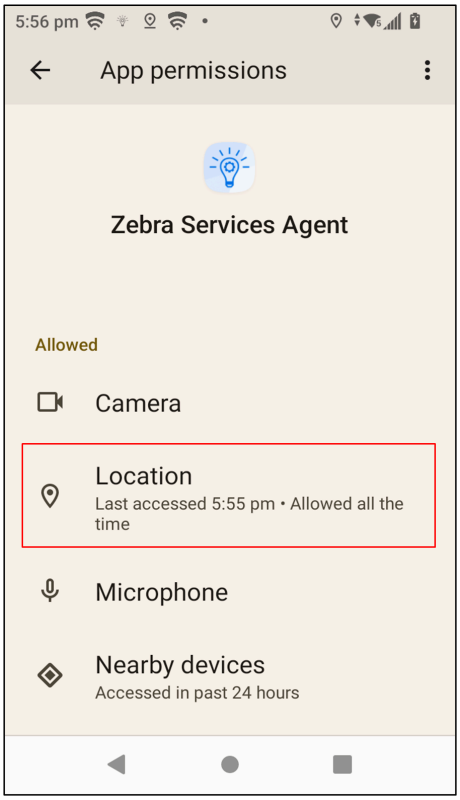


Table 8 Device Action Parameters

Parameter Key	Description	Default Value	Min	Max
Device Alert: Message	Specifies the message text displayed to the user.	Empty		
Device Alert: Alert Type	Specifies the alert format: `0` = Notification `1` = Alert Dialog with **OK** button `2` = Alert Dialog with **OK** **Need Assistance** button	`0`	`0`	`2`
Collect Log: DDT test required	Boolean specifying whether diagnostic tests are required.	`true`		
Collect Log: Log duration in minutes	Duration (in minutes) for log collection.	`5`	`5`	`1440`
Collect Log: Custom RxLogger Config	Custom configuration file or parameters for RxLogger.	Empty		
Outdoor Location Tracking: Action	Action to perform (for example, `start`).	`start`		
Outdoor Location Tracking: Collection interval in seconds	Interval (in seconds) between location data collection points.	`30`	`30`	`300`
Outdoor Location Tracking: Collection duration in minutes	Total duration (in minutes) for location tracking.	`60`	`60`	`1440`

Proactive Device Monitoring

Verify Proactive Device Monitoring and event alerts by observing the alert dialog workflows for severe device drop, frequent disconnections (WI-Fi or Bluetooth), unexpected reboots, and thermal anomalies.


NOTE: The following behavior applies to all supported troubleshoot events, including:

- **Severe device drop**
- **Frequent Wi-Fi Disconnections**
- **Frequent Bluetooth Disconnections**
- **Frequent Device Reboots**


The following workflow uses the **Severe device drop** scenario as an example.

- **Alert on Severe Drop Detection:**

  The application receives a **Severe device drop** event from the **ZDS Application**. An alert dialog is displayed to inform the user and recommend running all DDT tests.

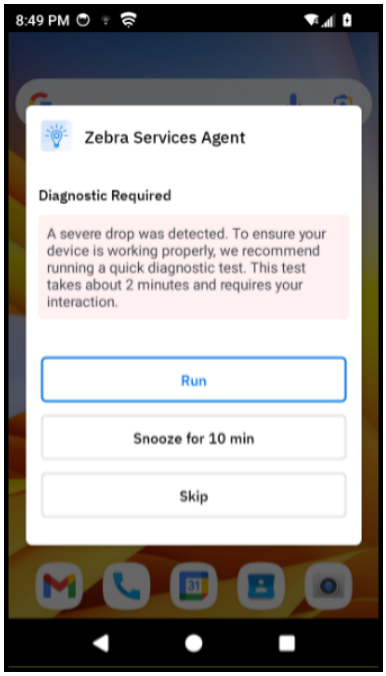


- **Run**: Starts the DDT diagnostic process by executing all DDT tests sequentially.
- **Snooze for 10 min**: Dismisses the alert dialog, and the prompt reappears after 10 minutes.
- **Skip**: Skips the diagnostics and reports the skip action to the administrator.

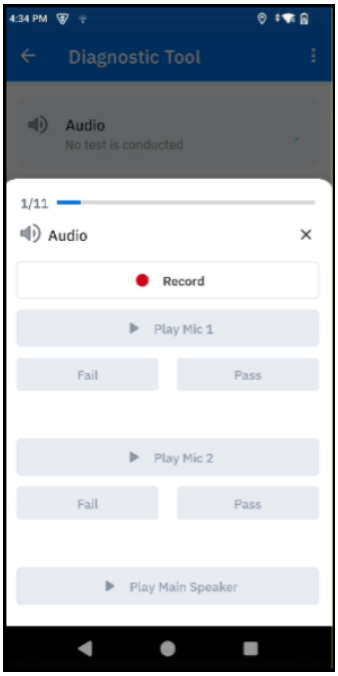


- **Thermal anomalies**
  - **Alert on Device Overheat**:

    ZSA receives the device overheat event from ZDS and displays the alert dialog to the user:

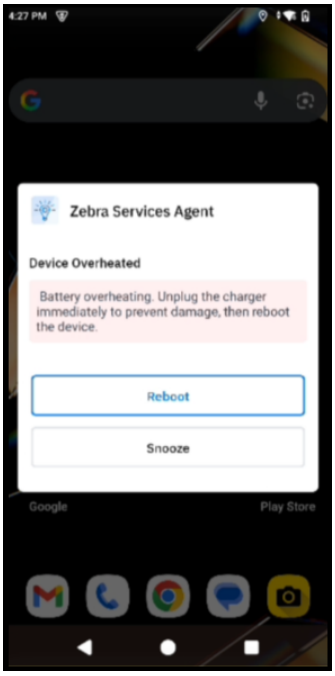

    - **Snooze**: Dismisses the alert dialog, and the prompt reappears after 5 minutes.
    - **Reboot**: Reboot the device.
  - **Alert on Device Over-Cold**:

    ZSA receives the device over-cold event from ZDS and displays the alert dialog to the user:

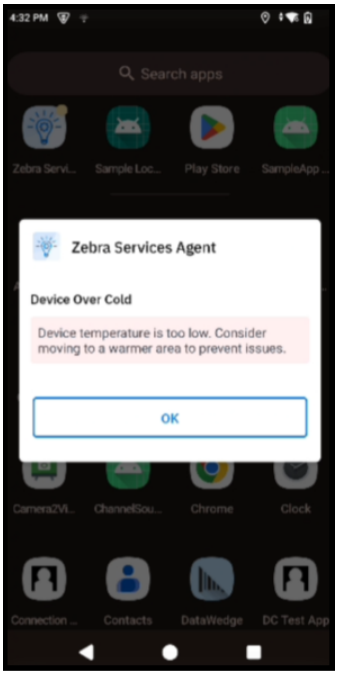

- **Ok**: Dismisses the alert.

NOTE: This feature can be configured using Managed Configuration through MDM or VIQ and is applicable to Zebra and non-Zebra devices.

Table 9 Proactive Device Monitoring Configuration Parameters

Troubleshoot Event	Key	Description	Default Value	Min	Max
Wi-Fi Disconnection	Enable/Disable	Enables or disables monitoring for frequent Wi-Fi disconnections.	`false`,		
	Alert Type for Wi-Fi disconnection	Specifies the alert format displayed on the device: `0` = Notification `1` = Dialog	`1`		
Bluetooth Disconnection	Enable/Disable	Enables or disables monitoring for frequent Bluetooth disconnections.	`false`		
	Alert Type for Bluetooth disconnection	Specifies the alert format displayed on the device: `0` = Notification `1` = Dialog	`1`		
Device Reboot	Enable/Disable	Enables or disables monitoring for frequent unexpected reboots.	`false`		

Table 9 Proactive Device Monitoring Configuration Parameters (Continued)

Troubleshoot Event	Key	Description	Default Value	Min	Max
	Alert Type for Device reboot	Specifies the alert format displayed on the device: `0` = Notification `1` = Dialog	`1`		
Severe Drop Detection	Enable/Disable	Specifies whether severe drop detection actions from ZDS are enabled.	`false`		
Device Overheated	Enable/Disable	Specifies whether device overheat protection actions from ZDS are enabled.	`false`		
Device Over Cold	Enable/Disable	Specifies whether low-temperature alert actions from ZDS are enabled.	`false`		


ZSA as a Mediator

With this feature, ZSA now serves as a mediator, capable of accepting data from third-party applications and uploading it to the server. Please reach out to the ZSA Zebra team for the developer guide.

NOTE: This feature is applicable to Zebra and non-Zebra devices.

Configure the ZSA Mobile Application


These features can be configured using Managed Configuration via MDM or VIQ. To receive managed configurations, ZSA displays a foreground notification in the device notification panel.

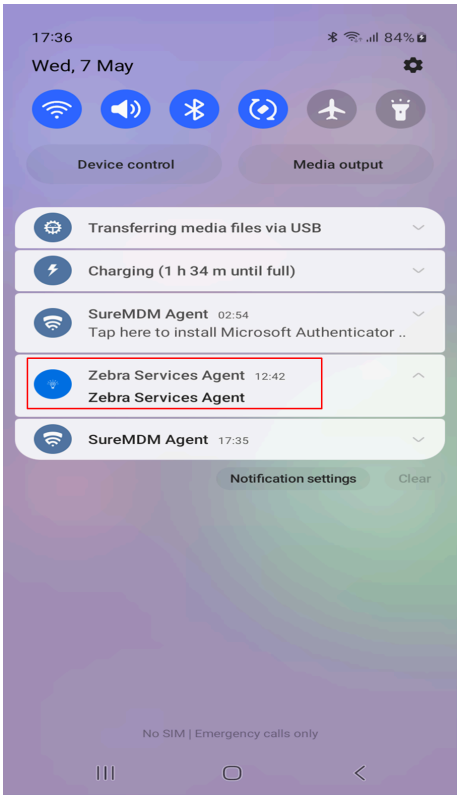

High-Level Design Overview

The Zebra Services Agent (ZSA) includes the following elements:

1. **ZSA Mobile Device Application**: This application is deployed on the device via Mobile Device Management (MDM) and starts as a service when the device boots up. The application provides user interface screens for interaction, shows notifications, and launches or terminates other Zebra applications. It is only supported on the Android platform.
2. **ZSA Server-Side Platform**: The server-side software and infrastructure are hosted in Zebra's Virtual Private Cloud on the Google Cloud Platform. The server infrastructure is a multi-tenant solution that provides data security and confidentiality.

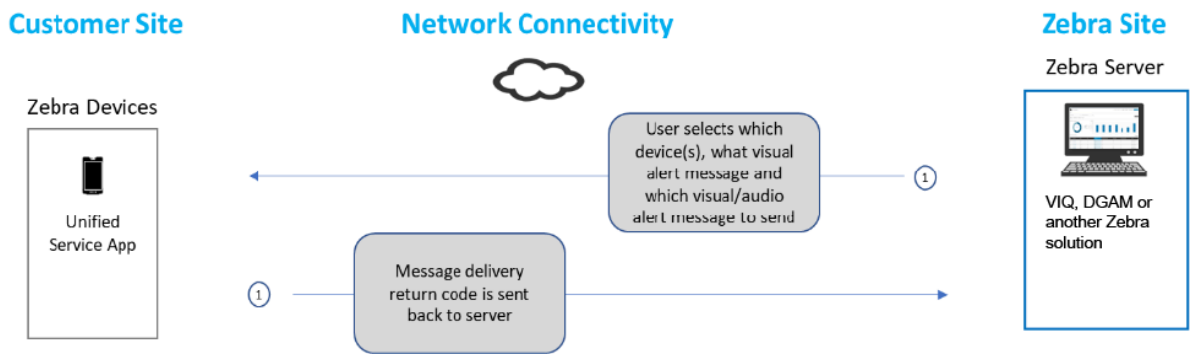

Zebra Services Agent Requirements

Zebra Services Agent (ZSA)
Requires 20.1 MB RAM
Requires 30 MB of storage memory
The impact on battery discharge is less than 2% over 24 hours.

Prerequisites

For deploying the Zebra Services Agent (ZSA) app and enabling alert notifications on the device:

1. The customer requires MDM to deploy APK to the devices. Supported MDM platforms are SOTI, AirWatch, and 42Gears.
2. The devices require an Android operating system version 10 or higher.
3. The Zebra Data Services (ZDS) and Zebra Services Agent (ZSA) must be enabled on the device. If the devices are behind a corporate firewall, ensure the ZDS and ZSA cloud servers can be reached. Below are the server info and port used by ZDS and ZSA:
   - Server 1: https://analytics.zebra.com on Port: 443
   - Server 2: https://device-https.savannacore.zebra.com on Port: 443
   - Server 3: https://usa.eu.zebra.com on Port:443

   NOTE: The servers can only be accessed by the software team via an internal endpoint.
4. Enable network connectivity on devices (WWAN or WLAN).

NOTE: Zebra recommends using DNS server names (instead of IP addresses) when allowlisting to avoid service interruptions due to IP address changes.

Android Version and Language Support

This section shows the supported Android operating system and languages.

Android Operating System	10 and above

Languages	English

Installation

- The Zebra team shares APK files with the customer admin.
- APK files are installed on devices via Mobile Device Management (MDM).

Information

This section provides information on Zebra Data Services (ZDS) and Diagnostic Tool.

You can enable the ZDS agent using the link below:

- zebra.com/zds-setup
- zebra.com/VisibilityIQF

For more information on Diagnostic Tool, refer to the link below:

- zebra.com/diagnostic-tool