

Installation Instructions

Read these instructions thoroughly before installing this kit.

Supported printers:

- ZE500
- ZE511
- ZE521



CAUTION—PRODUCT DAMAGE: Before disconnecting any cables, take note of the cable routing. If the cables are routed incorrectly, they could be pinched, damaged, or broken.




IMPORTANT: A qualified service technician must perform this installation. Retain all parts removed during disassembly, unless otherwise directed.

The graphics shown in this document depict a right-hand (RH) 4-inch model. Most of the graphics for a left-hand (LH) model would be a mirror image. Differences are noted when applicable.

Parts List

Before proceeding, verify that your kit contains the following items. To reorder specific parts, navigate to zebra.com/parts, and select your printer model.

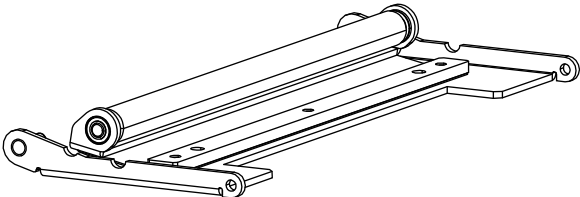	Peel Bracket Qty: 1
	Screw (M3 thumb) Qty: 1  T10

Tools Required

-  Hexalobular (6-lobe, star) keys, drivers, or bits
Size: T10
- Sorting bin for screws and small parts (optional)

Prepare for Installation




CAUTION: Turn off (O) the printer and disconnect it from the power source before performing the following procedure.




CAUTION—ESD: Observe proper electrostatic safety precautions when handling static-sensitive components such as circuit boards and printheads.

It may be necessary to remove the print engine from the applicator to gain unobstructed access. Follow these steps if necessary.

1. Loosen the center mounting bolt (1), but do not remove it. This bolt supports the print engine.

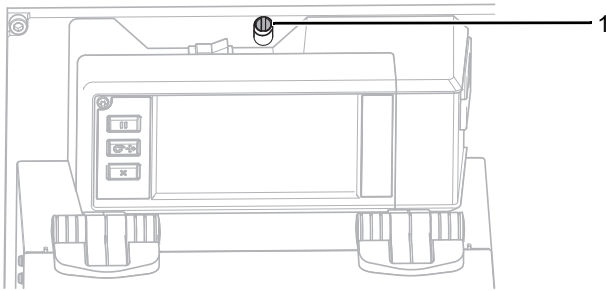


2. Remove the four screws securing the print engine to the applicator.

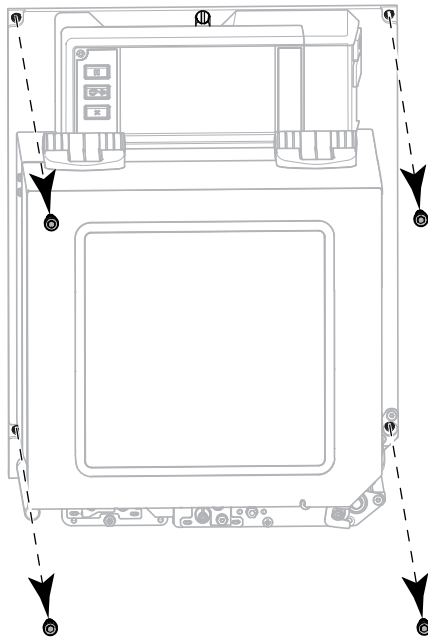

3. Lift the print engine off of the center mounting bolt and place it on a workbench.

Replace the Peel Bracket

1. Lift up on the peel bracket latch (1) and release the peel bracket (2).
2. Remove the  T10 thumb screw (3) securing the peel bracket.
3. Tilt the outboard end of the peel bracket down and lift the inboard end up and off of the pivot pin.

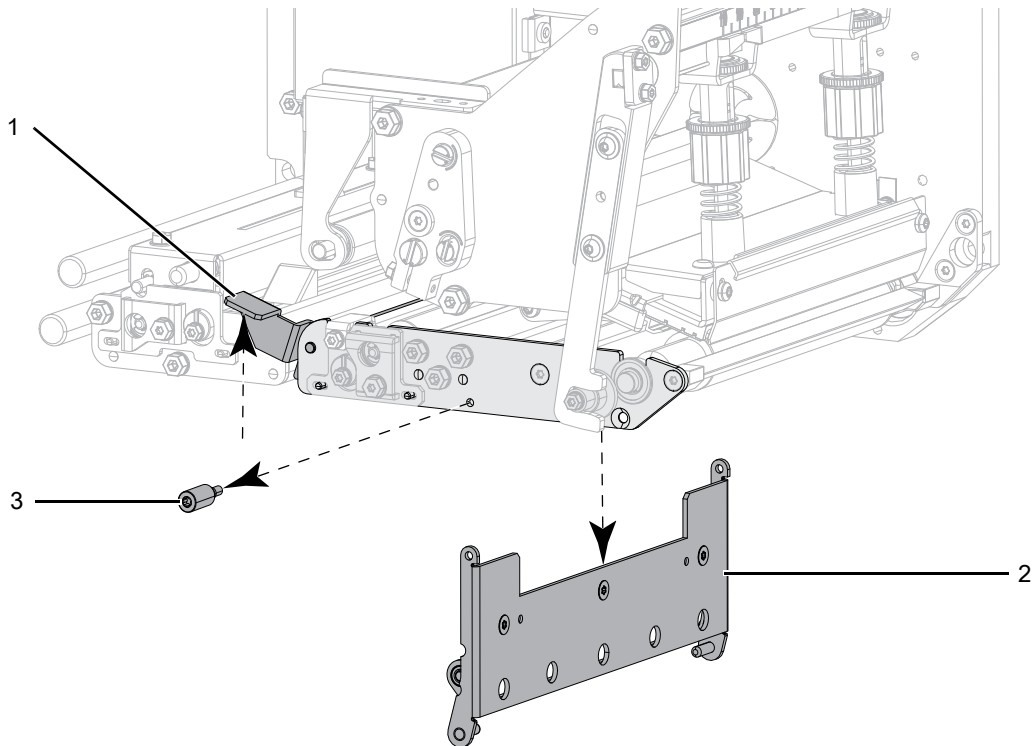

NOTE: Install the new peel bracket with the knurled roller facing the bottom of the print engine.

4. Place the inboard end of the peel roller bracket on the pivot pin.
5. Install the new  T10 thumb screw to secure the peel bracket.
6. Push the peel bracket up and against the peel latch to close.

Resume Printer Operation

1. Reinstall media and ribbon (if used).
2. Close the printhead assembly.
3. Close the media door.
4. Reinstall the print engine into the applicator, if it was removed.
 - a. Lift the print engine and support it on the center mounting bolt.
 - b. Reinstall the screws securing the print engine.
 - c. Tighten the center mounting bolt.
5. Reconnect the AC power cord and interface cables.
6. Turn on (I) the printer power.

The installation is complete.