


MC3000

User Guide

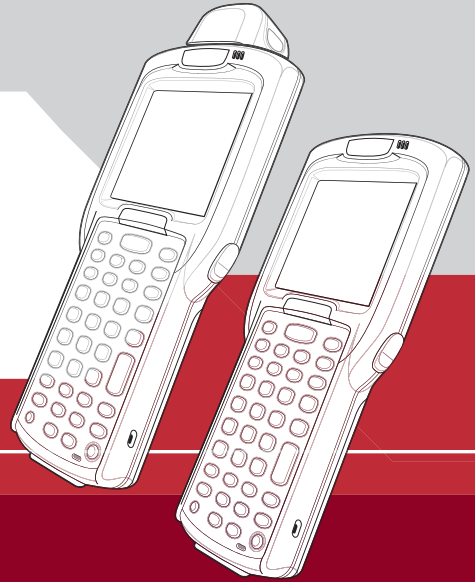

MC3000 User Guide

72-68899-01

Rev A

December 2004

© 2004 by Symbol Technologies, Inc. All rights reserved.

No part of this publication may be reproduced or used in any form, or by any electrical or mechanical means, without permission in writing from Symbol. This includes electronic or mechanical means, such as photocopying, recording, or information storage and retrieval systems. The material in this manual is subject to change without notice.

The software is provided strictly on an "as is" basis. All software, including firmware, furnished to the user is on a licensed basis. Symbol grants to the user a non-transferable and non-exclusive license to use each software or firmware program delivered hereunder (licensed program). Except as noted below, such license may not be assigned, sublicensed, or otherwise transferred by the user without prior written consent of Symbol. No right to copy a licensed program in whole or in part is granted, except as permitted under copyright law. The user shall not modify, merge, or incorporate any form or portion of a licensed program with other program material, create a derivative work from a licensed program, or use a licensed program in a network without written permission from Symbol. The user agrees to maintain Symbol's copyright notice on the licensed programs delivered hereunder, and to include the same on any authorized copies it makes, in whole or in part. The user agrees not to decompile, disassemble, decode, or reverse engineer any licensed program delivered to the user or any portion thereof.

Symbol reserves the right to make changes to any software or product to improve reliability, function, or design.

Symbol does not assume any product liability arising out of, or in connection with, the application or use of any product, circuit, or application described herein.

No license is granted, either expressly or by implication, estoppel, or otherwise under any Symbol Technologies, Inc., intellectual property rights. An implied license only exists for equipment, circuits, and subsystems contained in Symbol products.

Symbol, Spectrum One, and Spectrum24 are registered trademarks of Symbol Technologies, Inc. Bluetooth is a registered trademark of Bluetooth SIG. Microsoft, Windows and ActiveSync are either registered trademarks or trademarks of Microsoft Corporation. Other product names mentioned in this manual may be trademarks or registered trademarks of their respective companies and are hereby acknowledged.

Symbol Technologies, Inc.
One Symbol Plaza
Holtsville, New York 11742-1300
<http://www.symbol.com>

Revision History

Changes to the original manual are listed below:

Change	Date	Description
Rev A	Dec. 2004	Initial Release

Contents

Revision History	iii
------------------------	-----

About This Guide

Introduction	xi
Documentation Set	xi
Configurations	xii
Chapter Descriptions	xii
Notational Conventions	xiii
Related Documents and Software	xiii
Service Information	xiv
Symbol Support Center	xiv

Chapter 1. Getting Started

Introduction	1-3
Unpacking the Mobile Computer	1-3
Accessories	1-4
Parts	1-5
Rotating Scan Turret	1-6
Mobile Computer Startup	1-7
Install Main Battery	1-7
Battery Charging	1-8
Spare Battery Charging	1-9
Stylus	1-9

Starting the Mobile Computer	1-10
Calibration Screen	1-10
Series 3000 Demo Window	1-11
Waking the Mobile Computer	1-11
Main Battery Removal	1-12
Strap/Door Assembly Removal and Replacement	1-13

Chapter 2. Operating the MC3000

Introduction	2-3
Power Button	2-3
Keypads	2-3
Keypad Special Functions	2-3
28-Key Keypad	2-4
38-Key Keypad	2-7
48-Key Keypad	2-10
Series 3000 Demo Window	2-12
Desktop Window	2-12
Taskbar	2-13
Battery Unknown Icon	2-14
Start Button	2-15
Programs Menu	2-15
Keyboard Input Panel Button	2-16
Desktop Display Button	2-16
Task Manager and Properties	2-16
Task Manager	2-16
Properties	2-17
Entering Information	2-18
Entering Information Using Keypad	2-18
Entering Information Using the Keyboard Input Panel	2-18
Entering Data via the Bar Code Scanner	2-18
Data Capture	2-19
Laser Scanning	2-19
Scan LED Indicators	2-19
Scanning Considerations	2-20
Laser Decode Ranges	2-20
Imaging	2-22
Imager	2-22
Operational Modes	2-22
Decode Mode	2-22
Image Capture	2-22
Aiming the Mobile Computer	2-22
Imager Decode Ranges	2-24
Resetting the Mobile Computer	2-26
Performing a Warm Boot	2-26
Performing a Cold Boot	2-26
Waking the Mobile Computer	2-27
File System Directory Structure	2-28
Connecting to the Internet on a Wireless Network	2-29

Chapter 3. Accessories

Introduction.....	3-3
Cradles	3-3
Spare Battery Chargers	3-3
Cables.....	3-3
SD Card.....	3-3
Plastic Holster.....	3-3
Single Slot Serial/USB Cradle	3-4
Battery Charging.....	3-4
Four Slot Charge Only Cradle	3-6
Battery Charging.....	3-6
LED Charge Indications.....	3-6
Four Slot Spare Battery Charger.....	3-7
Spare Battery Charging	3-7
LED Charge Indications.....	3-7
Cables.....	3-8
Battery Charging and Operating Power	3-9
LED Charge Indications.....	3-9
Universal Battery Charger (UBC) Adapter	3-10
Spare Battery Charging	3-10
UBC Adapter LED Charge Indications.....	3-11
Secure Device Card	3-12
Plastic Holster.....	3-13
Using the Plastic Holster	3-14
Inserting and Removing the Mobile Computer	3-15
Fabric Holster	3-15

Chapter 4. Maintenance & Troubleshooting

Introduction.....	4-3
Maintaining the Mobile Computer.....	4-3
Troubleshooting	4-4
Mobile Computer	4-4
Single Slot Serial/USB Cradle	4-6
Four Slot Charge Only Cradle	4-7
Four Slot Spare Battery Charger.....	4-7
UBC Adapter	4-8
Cables.....	4-8

Appendix A. Technical Specifications

Mobile Computer Technical Specifications	A-3
--	-----

Appendix B. Keypad Functions/Special Characters

[Introduction.....](#) B-3

[Keypads.....](#) B-3

Glossary

Index

Tell Us What You Think...

About This Guide

Contents

Introduction	xi
Documentation Set	xi
Configurations	xii
Chapter Descriptions	xii
Notational Conventions	xiii
Related Documents and Software	xiii
Service Information	xiv
Symbol Support Center	xiv

Introduction

This guide provides information about using the MC3000 mobile computers and accessories.




Screens and windows pictured in this guide are samples and may differ from actual screens.

Documentation Set

The documentation set for the MC3000 is divided into guides that provide information for specific user needs.

- **Microsoft Application Guide** - describes how to use Microsoft developed applications.
- **Symbol Application Guide** - describes how to use Symbol developed applications.
- **MC3000 User Guide** - describes how to use the MC3000 mobile computer.
- **MC3000 Integrator Guide** - describes how to set up the MC3000 mobile computer and the accessories.
- **SMDK Help File** - provides API information for writing applications.

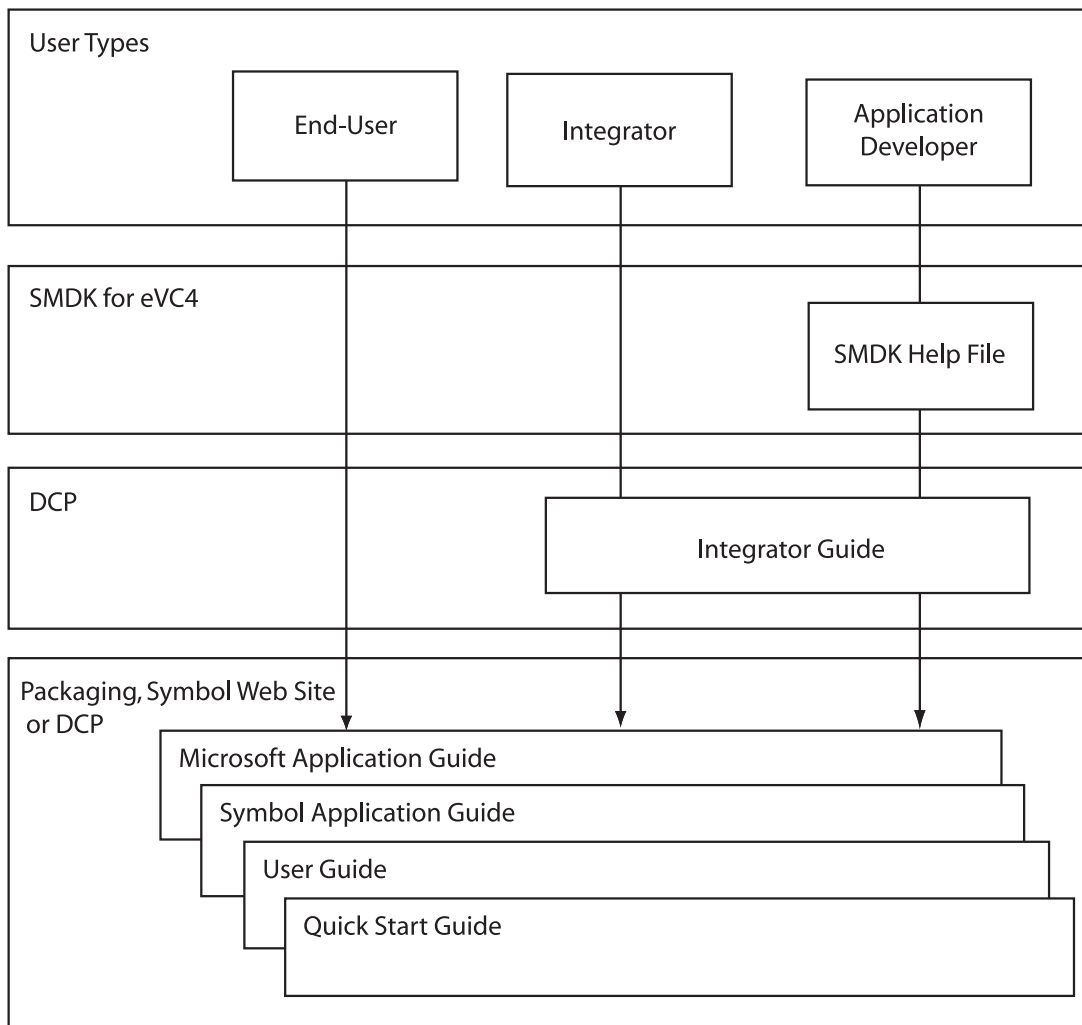

Configurations

Depending on device configuration, the MC3000 includes the following features:

- **Scan type:** MC3000 1D/2D Imager (MC3000-K) and the MC3000 Laser with Rotating Scan Turret (MC3000-R)
- **Processor/Memory:**
 - 312MHz with 32MB RAM/64MB flash or
 - 520MHz with 64MB RAM/64MB flash.
- **Scan Engines:** 1-D laser scanner or 1-D/2-D imager
- **Keypads:** 28-Key, 38-Key, or 48-Key
- **Displays:** Color touch sensitive screen, Monochrome touch sensitive screen
- **Operating Systems:** Microsoft® Windows CE .NET 4.2 Professional
Microsoft® Windows CE .NET 4.2 Core
- **Radio:** 802.11bg.

Chapter Descriptions

Topics covered in this guide are as follows:

- [Chapter 1, Getting Started](#), describes the mobile computer's physical characteristics, how to install and charge the batteries, remove and replace the Strap/Door assembly and how to start the mobile computer for the first time.
- [Chapter 2, Operating the MC3000](#), provides basic instructions for using the mobile computer and navigating the mobile computer software.
- [Chapter 3, Accessories](#), describes the accessories available for the mobile computer and how to use the accessories to charge the mobile computer.
- [Chapter 4, Maintenance & Troubleshooting](#), includes instructions on cleaning and storing the mobile computer, and provides troubleshooting solutions for potential problems during mobile computer operation.
- [Chapter A, Technical Specifications](#), includes a table listing the technical specifications for the mobile computer.
- [Chapter B, Keypad Functions/Special Characters](#), contains special character generation tables.

Notational Conventions

The following conventions are used in this document:

- The term “mobile computer” refers to the Symbol MC3000.
- *Italics* are used to highlight the following:
 - Chapters and sections in this and related documents
 - Dialog box, window and screen names
 - Drop-down list and list box names
 - Check box and radio button names
 - Icons on a screen.
- **Bold** text is used to highlight the following:
 - Key names on a keypad
 - Button names on a screen.
- Bullets (•) indicate:
 - Action items
 - Lists of alternatives
 - Lists of required steps that are not necessarily sequential.
- Sequential lists (e.g., those that describe step-by-step procedures) appear as numbered lists.

Related Documents and Software

The following items provide more information about the MC3000 mobile computers.

- *MC3000 Quick Start Guide (poster)*, p/n 72-68902-xx
- *MC3000 Licensing, Patent and Regulatory Information*, p/n 72-68903-xx
- *MC3000 Integrator Guide*, p/n 72E-68900-xx
- *Symbol Application Guide*, p/n 72-68901-xx
- *Microsoft® Applications User Guide for Symbol Devices*, p/n 72E-68197-xx
- *Symbol Mobility Developer Kit (SMDK) Help File*, p/n 72E-38880-02
- *Symbol Mobility Developer Kit for eMbedded Visual C++ v4.0 (SMDK for eVC4)*, available at: <http://devzone.symbol.com>
- Device Configuration Package for MC3000 (DCP for MC3000), available at: <http://devzone.symbol.com>
- ActiveSync software, available at: <http://www.microsoft.com>.

For the latest version of this guide and all guides, go to: <http://www.symbol.com/manuals>.

Service Information

If an equipment problem occurs, contact the appropriate regional [Symbol Support Center](#), see [page xiv](#) for contact information. Before calling, have the model number, serial number and several bar code symbols at hand.

Call the Support Center from a phone near the scanning equipment so that the service person can try to talk through the problem. If the equipment is found to be working properly and the problem is symbol readability, the Support Center will request samples of bar codes for analysis at our plant.

If the problem cannot be solved over the phone, the equipment may need to be returned for servicing. If that is necessary, specific directions will be provided.



Symbol Technologies is not responsible for any damages incurred during shipment if the approved shipping container is not used. Shipping the units improperly can possibly void the warranty.

Symbol Support Center

For service information, warranty information or technical assistance contact or call the Symbol Support Center in:

United States

Symbol Technologies, Inc.
One Symbol Plaza
Holtsville, New York 11742-1300
1-800-653-5350

United Kingdom

Symbol Technologies
Symbol Place
Winnersh Triangle, Berkshire RG41 5TP
United Kingdom
0800 328 2424 (Inside UK)
+44 118 945 7529 (Outside UK)

Australia

Symbol Technologies Pty. Ltd.
432 St. Kilda Road
Melbourne, Victoria 3004
1-800-672-906 (Inside Australia)
+61-3-9866-6044 (Outside Australia)

Denmark/Danmark

Symbol Technologies AS
Dr. Neergaardsvej 3
2970 Hørsholm
7020-1718 (Inside Denmark)
+45-7020-1718 (Outside Denmark)

Canada

Symbol Technologies Canada, Inc.
5180 Orbitor Drive
Mississauga, Ontario, Canada L4W 5L9
1-866-416-8545 (Inside Canada)
905-629-7226 (Outside Canada)

Asia/Pacific

Symbol Technologies Asia, Inc (Singapore Branch)
230 Victoria Street #05-07/09
Bugis Junction Office Tower
Singapore 188024
Tel: +65-6796-9600
Fax: +65-6337-6488

Austria/Österreich

Symbol Technologies Austria GmbH
Prinz-Eugen Strasse 70 / 2.Haus
1040 Vienna, Austria
01-5055794-0 (Inside Austria)
+43-1-5055794-0 (Outside Austria)

Europe/Mid-East Distributor Operations

Contact your local distributor or call
+44 118 945 7360

Finland/Suomi

Oy Symbol Technologies
Kaupintie 8 A 6
FIN-00440 Helsinki, Finland
9 5407 580 (Inside Finland)
+358 9 5407 580 (Outside Finland)

Germany/Deutschland

Symbol Technologies GmbH
Waldstrasse 66
D-63128 Dietzenbach, Germany
6074-49020 (Inside Germany)
+49-6074-49020 (Outside Germany)

Latin America Sales Support

2730 University Dr.
Coral Springs, FL 33065 USA
1-800-347-0178 (Inside United States)
+1-954-255-2610 (Outside United States)
954-340-9454 (Fax)

Netherlands/Nederland

Symbol Technologies
Kerkplein 2, 7051 CX
Postbus 24 7050 AA
Varsseveld, Netherlands
315-271700 (Inside Netherlands)
+31-315-271700 (Outside Netherlands)

France

Symbol Technologies France
Centre d'Affaire d'Antony
3 Rue de la Renaissance
92184 Antony Cedex, France
01-40-96-52-21 (Inside France)
+33-1-40-96-52-50 (Outside France)

Italy/Italia

Symbol Technologies Italia S.R.L.
Via Cristoforo Colombo, 49
20090 Trezzano S/N Naviglio
Milano, Italy
2-484441 (Inside Italy)
+39-02-484441 (Outside Italy)

Mexico/México

Symbol Technologies Mexico Ltd.
Torre Picasso
Boulevard Manuel Avila Camacho No 88
Lomas de Chapultepec CP 11000
Mexico City, DF, Mexico
5-520-1835 (Inside Mexico)
+52-5-520-1835 (Outside Mexico)

Norway/Norge

Symbol's registered and mailing address:
Symbol Technologies Norway
Hoybratenveien 35 C
N-1055 OSLO, Norway

Symbol's repair depot and shipping address:
Symbol Technologies Norway
Enebakkveien 123
N-0680 OSLO, Norway
+47 2232 4375

South Africa

Symbol Technologies Africa Inc.
Block B2
Rutherford Estate
1 Scott Street
Waverly 2090 Johannesburg
Republic of South Africa
11-809 5311 (Inside South Africa)
+27-11-809 5311 (Outside South Africa)

Sweden/Sverige

"Letter" address:

Symbol Technologies AB
Box 1354
S-171 26 SOLNA
Sweden

Visit/shipping address:

Symbol Technologies AB
Solna Strandväg 78
S-171 54 SOLNA
Sweden

Switchboard: 08 445 29 00 (domestic)
Call Center: +46 8 445 29 29 (international)
Support E-Mail: Sweden.Support@se.symbol.com

Spain/España

Symbol Technologies S.L.
Avenida de Bruselas, 22
Edificio Sauce
Alcobendas, Madrid 28108
Spain
91 324 40 00 (Inside Spain)
+34 91 324 40 00 (Outside Spain)
Fax: +34.91.324.4010

If the Symbol product was purchased from a Symbol Business Partner, contact that Business Partner for service.

Getting Started

Chapter Contents

Introduction	1-3
Unpacking the Mobile Computer	1-3
Accessories	1-4
Parts	1-5
Rotating Scan Turret	1-6
Mobile Computer Startup	1-7
Install Main Battery	1-7
Battery Charging	1-8
Spare Battery Charging	1-9
Stylus	1-9
Starting the Mobile Computer	1-10
Calibration Screen	1-10
Series 3000 Demo Window	1-11
Waking the Mobile Computer	1-11
Main Battery Removal	1-12
Strap/Door Assembly Removal and Replacement	1-13

Introduction

This chapter describes the mobile computer physical characteristics, how to install and charge the batteries, how to remove and replace the Strap/Door Assembly and how to start the mobile computer for the first time.

Unpacking the Mobile Computer

Carefully remove all protective material from around the mobile computer and save the shipping container for later storage and shipping. Verify that the equipment listed below is included:

- MC3000 mobile computer
- Strap/Door Assembly, attached to the mobile computer
- Stylus, in the strap
- Regulatory Guide
- Quick Start Guide (poster).

Depending on the configuration ordered, the mobile computer shipping container or additional shipping container may include:

- Standard Battery (lithium-polymer)
- Extended Life Battery (lithium-ion)
- Cable(s)
- Power Supply
- Cradles.

Inspect the equipment for damage. If any equipment is missing or damaged, contact the Symbol Technologies Support Center immediately. See [page xiv](#) for contact information.

Accessories

Table 1-1 lists the MC3000 accessories.

Table 1-1. MC3000 Accessories

Accessory	Description
Single Slot Serial/USB Cradle	Charges the mobile computer main battery and a spare battery, and synchronizes the mobile computer with a host computer through either a serial or USB connection.
Four Slot Charge Only Cradle	Charges up to four mobile computers.
Four Slot Spare Battery Charger	Charges up to four mobile computer spare batteries.
Power Supply	Country specific and accessory specific, power supply.
USB Client Charge Cable	Provides USB client communication capabilities and charges the mobile computer.
RS232 Charge Cable	Provides RS232 communication capabilities and charges the mobile computer.
O'Neil Printer Cable	Provides printer specific communication capabilities.
Zebra Printer Cable	Provides printer specific communication capabilities.
Monarch Printer Cable	Provides printer specific communication capabilities.
Single Slot Cradle RS232 Cable	Provides serial host communication capabilities and charges the mobile computer.
Single Slot Cradle USB Cable	Provides USB communication capabilities and charges the mobile computer.
MC3000 Universal Battery Charger Adapter (UBC)	Adapts the UBC for use with MC3000 batteries.
Stylus	Performs pen and mouse functions.
Plastic Holster	Provides a clip on holder for the mobile computer.
Fabric Holster	Provides a soft, clip on holder and a shoulder strap for the mobile computer.
Accessory Regulatory Guide or Accessory Quick Reference Guide (QRG)	Provided in the box with the accessory. The Regulatory Guide provides the regulatory information required for the accessory and the Quick Reference Guide (QRG) provides the regulatory information and setup information required for the accessory.
Symbol Mobility Developer Kit for eMbedded Visual C++ v4.0 (SMDK for eVC4)	A development tool used to create native C and C++ applications for all Symbol mobile computers running the Microsoft Windows CE operating system. Available at: http://devzone.symbol.com .
Device Configuration Package (DCP) for MC3000	A development tool used to create and download hex images that represent flash partitions to the mobile computer. Available at: http://devzone.symbol.com .

Parts

There are two versions of the MC3000 mobile computers, the MC3000 1D/2D Imager (MC3000-K) and the MC3000 Laser with Rotating Scan Turret (MC3000-R). For more information on the Rotating Scan Turret, see [Figure 1-3 on page 1-6](#).

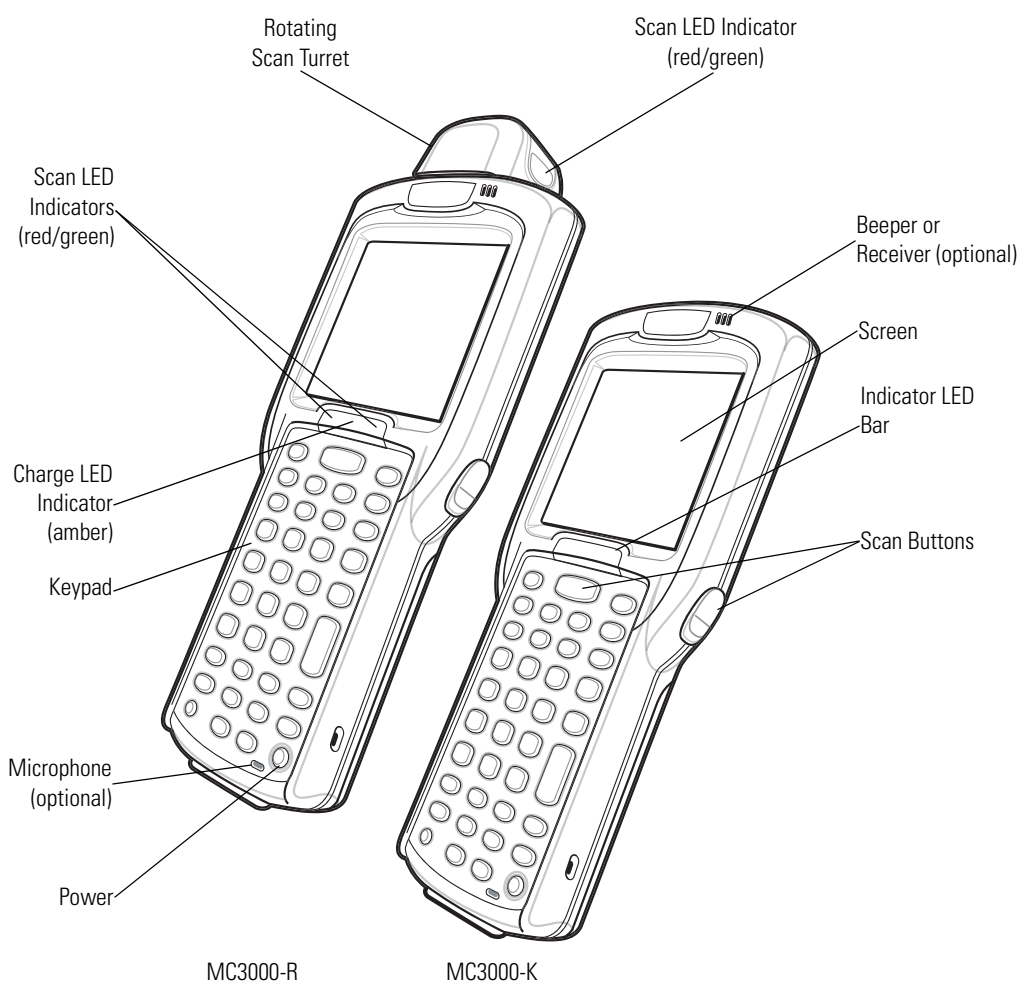


Figure 1-1. MC3000 Imager (MC3000-K) and MC3000 Laser (MC3000-R) Mobile Computers (front view)

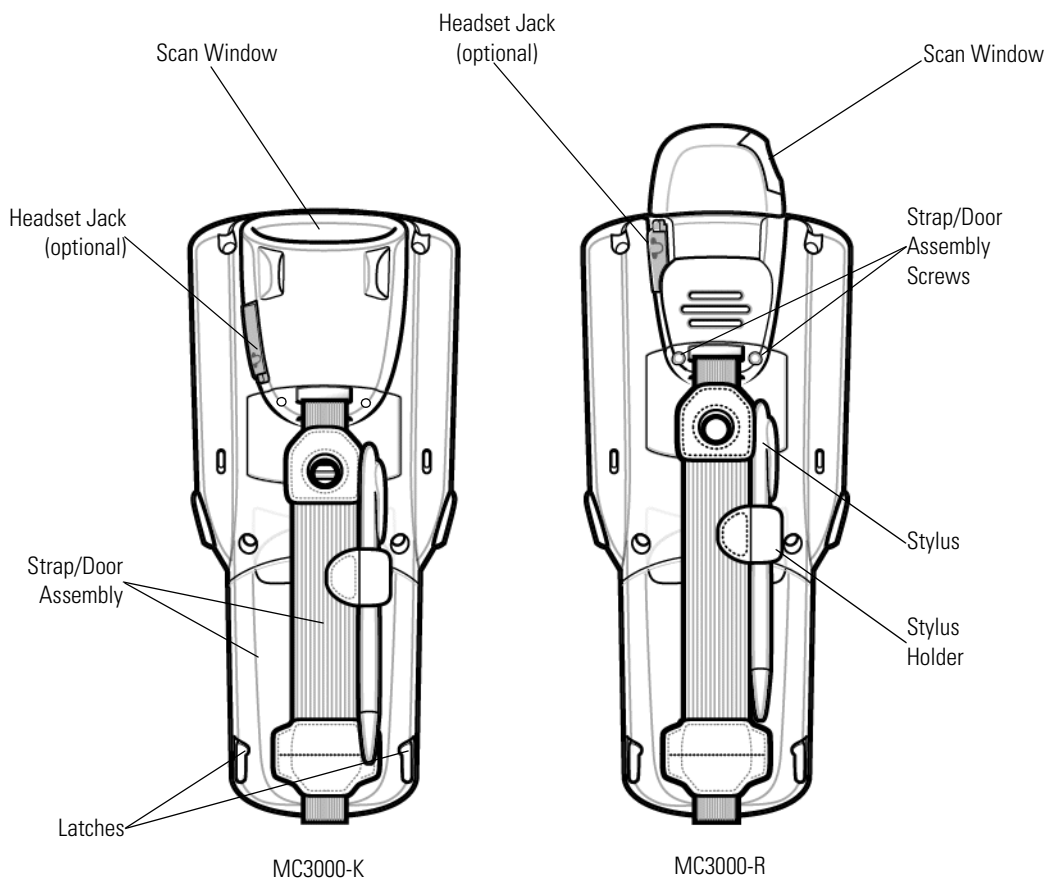


Figure 1-2. MC3000 Imager (MC3000-K) and MC3000 Laser (MC3000-R) Mobile Computers (back view)

Rotating Scan Turret

The MC3000-R mobile computer features a Rotating Scan Turret with three position stops. This feature offers greater scanning flexibility.

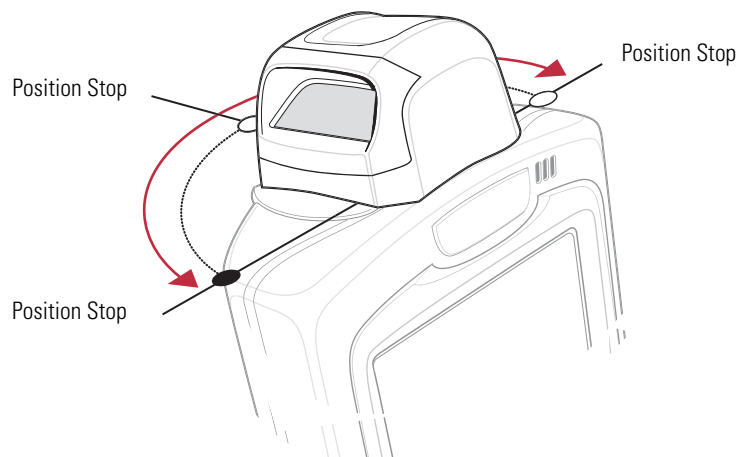


Figure 1-3. Rotating Scan Turret

Mobile Computer Startup

To start using the mobile computer:

- Install the main battery.
- Charge the main battery and the backup battery.
- Start the mobile computer.

Install Main Battery

If the main battery is charged, the mobile computer can be used immediately. If the main battery is not charged, see [Battery Charging on page 1-8](#). To remove the main battery, see [Main Battery Removal on page 1-12](#).

To install the main battery:

1. Rotate the latches to the open position.
2. Pull on the strap to lift the Strap/Door Assembly off, bottom first.
3. Insert the battery into the slot, bottom first, and press the battery gently into the slot. The battery clip locks the battery into place.
4. With the latches in the open position, replace the Strap/Door Assembly, top first, and press to close.
5. Rotate the latches (to the lock position) to lock the Strap/Door Assembly in place.

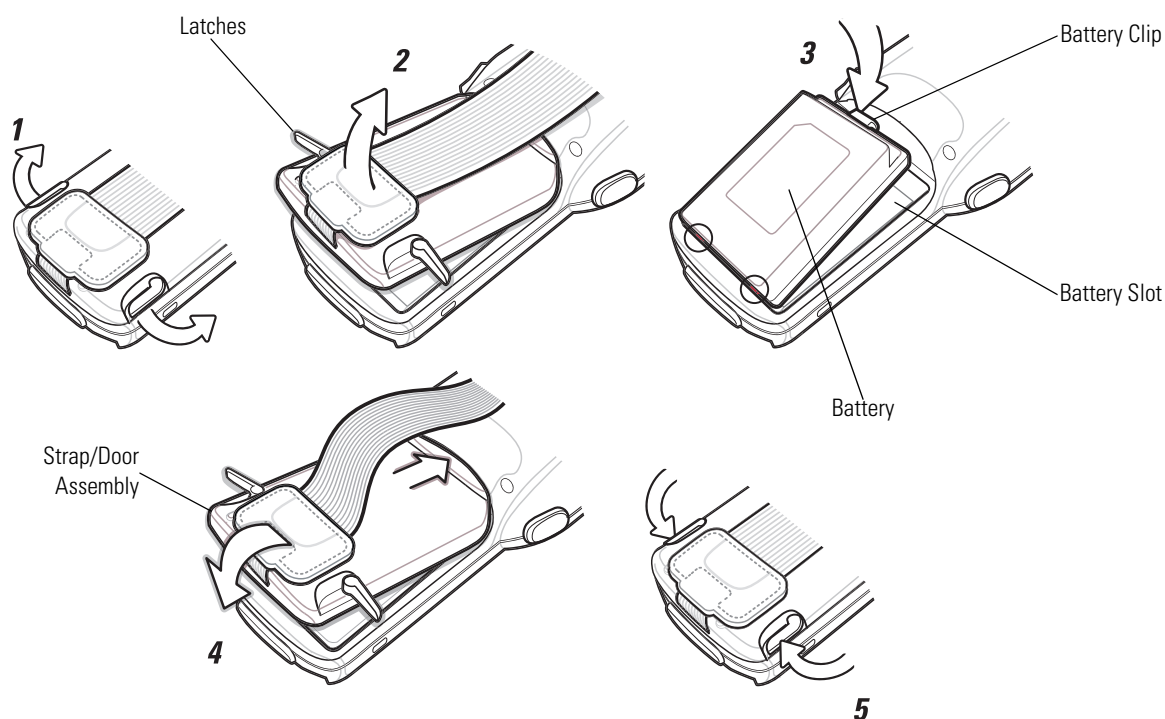


Figure 1-4. Main Battery Installation

Battery Charging

Use the mobile computer cradles, cables and spare battery chargers to charge the mobile computer main battery.

The main battery can be charged before insertion into the mobile computer or after it is installed. There are two main batteries for the MC3000, the Standard Battery and the Extended Life Battery. Either battery can be used, but the Extended Life Battery requires a different Strap/Door Assembly. Use one of the spare battery chargers to charge the main battery (out of the mobile computer) or one of the cradles to charge the main battery while it is installed in the mobile computer.

Before using the mobile computer for the first time, fully charge the main battery. When the main battery is fully charged, the amber Charge LED Indicator remains lit. For more information see [Table 1-2 on page 1-9](#). Charge time for the Standard Battery is usually less than four hours and charge time for the Extended Life Battery is usually less than six hours.

The mobile computer is equipped with a memory backup battery which automatically charges from the fully-charged main battery. When the mobile computer is used for the first time, the backup battery requires approximately 15 hours to fully charge. This is also true any time the backup battery is discharged which occurs when the main battery is removed for several hours. The backup battery retains data in memory for at least 30 minutes after the mobile computer main battery is removed. When the mobile computer reaches very low battery state, the combination of main battery and backup battery retains data in memory for at least 72 hours.



Do not remove the main battery within the first 15 hours of use. If the main battery is removed before the backup battery is fully charged, data may be lost.

Batteries must be charged within the 32° to 104° F (0° to +40° C) ambient temperature range.

The following accessories can be used to charge batteries:

- Cradles (and a power supply):
 - Single Slot Serial/USB Cradle
 - Four Slot Charge Only Cradle.
- Cables (and a power supply):
 - USB Client Charge Cable
 - Serial (RS232) Charge Cable
- Spare Battery Chargers (and a power supply):
 - Single Slot Serial/USB Cradle
 - Four Slot Spare Battery Charger
 - Universal Battery Charger (UBC) Adapter.

To charge the mobile computer using the cradles:

1. Insert the mobile computer into a cradle. See [Chapter 3, Accessories](#) for accessory setup.
2. The mobile computer starts to charge automatically. The amber Charge LED Indicator indicates the charge status. See [Table 1-2 on page 1-9](#) for charging indications.

To charge the mobile computer using the cables:

1. Connect the MC3000 Communication/Charge Cable to the appropriate power source and connect to the mobile computer. See [Chapter 3, Accessories](#) for accessory setup.
2. The mobile computer starts to charge automatically. The amber Charge LED Indicator indicates the charge status. See [Table 1-2](#) for charging indications.

Table 1-2. Mobile Computer LED Charge Indicators

LED	Indication
Off	Mobile computer not placed correctly in the cradle; charge cable not connected correctly; charger is not powered.
Fast Blinking Amber	Error in charging; check placement of the mobile computer.
Slow Blinking Amber	Mobile computer is charging.
Solid Amber	Charging complete. Note: When the battery is initially inserted in the mobile computer, the amber LED flashes once if the battery power is low or the battery is not fully inserted.

Spare Battery Charging

There are three accessories that can be used to charge a spare battery:

- Single Slot Serial/USB Cradle
- Four Slot Spare Battery Charger
- UBC Adapter.

To charge a spare battery:

1. Connect the charging accessory to the appropriate power source. See [Chapter 3, Accessories](#) for setup instructions.
2. Insert the spare battery into the spare battery charging slot and gently press down on the battery to ensure proper contact.

The battery starts to charge automatically. The amber charge LED Indicator lights to indicate the charge status. See [Chapter 3, Accessories](#) for charging indications. The Standard Battery usually fully charges in less than four hours and the Extended Life Battery usually fully charges in less than six hours.

Stylus

Use the stylus for selecting items and entering information on the screen. The stylus functions as a pen and a mouse. Tap the touch screen once with the stylus to select options and open menu items.

To remove the stylus, slide the stylus out of the stylus holder. To store the stylus, push the stylus back into the stylus holder.

Starting the Mobile Computer

When the mobile computer is powered on for the first time, it initializes. The *Symbol Splash* screen appears for a short period of time, followed by the *Calibration* screen.



Figure 1-5. Symbol Splash Screen

After the calibration procedure is performed the factory settings launch the *Series 3000 Demo* window. Application specific shells may provide application specific windows instead of the *Series 3000 Demo* window. These screens also appear when a cold boot is performed.

If the mobile computer does not power on, see [Resetting the Mobile Computer on page 2-27](#).

Calibration Screen

Use the *Calibration* screen to align the touch screen:

1. Remove the stylus from the stylus holder.
2. Carefully press and briefly hold the stylus tip on the center of the *Calibration* screen target. Repeat the procedure as the target moves and stops at different locations on the screen. This enters the new calibration settings.

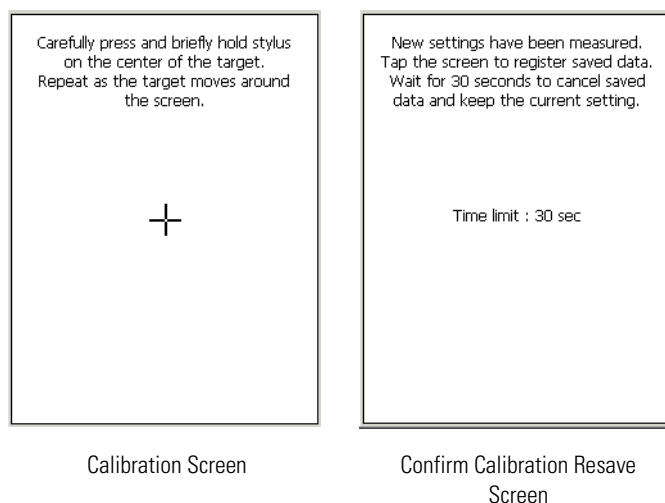


Figure 1-6. Calibration Screen

3. Once all of the new calibration settings are input, the *Confirm Calibration Resave* screen appears. Tap the screen within 30 seconds to save the new calibration settings or allow the 30 second timer to expire and the new calibration settings are not saved.

Series 3000 Demo Window

The *Series 3000 Demo* window is the factory default menu. On initial power up (or on a warm or cold boot) the *Series 3000 Demo* window appears. These sample/demo applications are intended to be used by application developers as application development examples. These applications were not developed to support end users. Refer to the *Symbol Application Guide* for information about the *Series 3000 Demo* window applications.

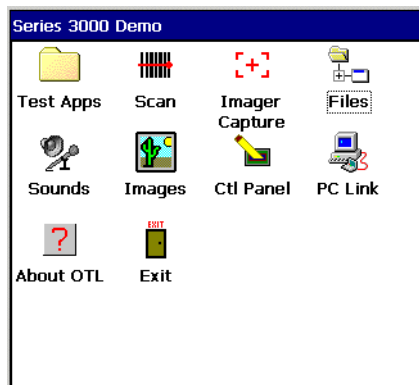


Figure 1-7. Series 3000 Demo Window

Waking the Mobile Computer

The wakeup condition settings are used to define what actions wake up the mobile computer. The settings are configurable so they are subject to change/update. For more information see, [Waking the Mobile Computer on page 2-28](#).

Main Battery Removal

Before removing the main battery, press the red **Power** button to turn off the screen. This sets the mobile computer to suspend mode.

To remove the main battery:

1. Rotate the latches to the open position.
2. Pull the strap to lift the Strap/Door Assembly off, bottom first.
3. Release the battery clip (at the top of the battery) and lift the battery out top first.

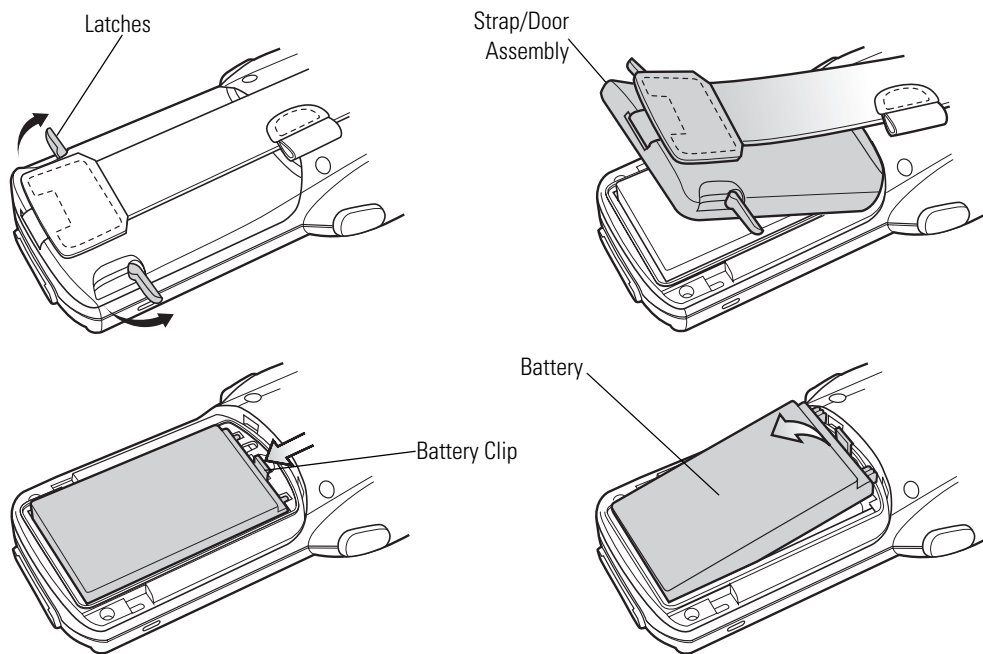


Figure 1-8. Main Battery Removal



The SD card holder is located under the battery. To install the SD card, see [Secure Device Card on page 3-12](#)

Strap/Door Assembly Removal and Replacement

The Strap/Door Assembly consists of a hand strap and the battery door. There are two versions of this assembly, one for the Standard Battery and one for the Extended Life Battery. Before removing the Strap/Door Assembly, press the red **Power** button to turn off the screen and set the mobile computer to suspend mode.

To remove the Strap/Door Assembly:

1. Rotate the latches to the open position.
2. Pull the strap to lift the Strap/Door Assembly off, bottom first.
3. Use a #00 Phillips screwdriver to remove the two screws securing the mounting clip to the mobile computer.
4. Lift the mounting clip.
5. Slide the mounting clip out of the strap loop.

Reverse the procedure to replace the Strap/Door Assembly.

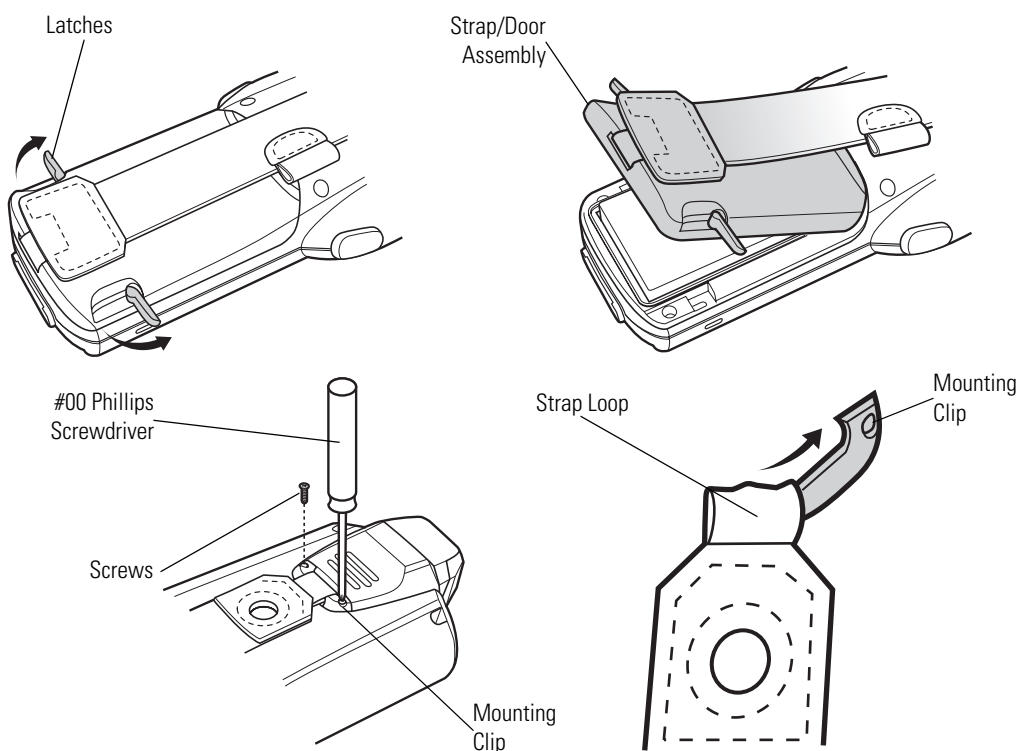


Figure 1-9. Strap/Door Removal and Replacement

Operating the MC3000

Chapter Contents

Introduction	2-3
Power Button	2-3
Keypads	2-3
Keypad Special Functions	2-3
28-Key Keypad	2-4
38-Key Keypad	2-7
48-Key Keypad	2-10
Series 3000 Demo Window	2-12
Desktop Window	2-12
Taskbar	2-13
Battery Unknown Icon	2-14
Start Button	2-15
Programs Menu	2-15
Keyboard Input Panel Button	2-16
Desktop Display Button	2-16
Task Manager and Properties	2-16
Task Manager	2-16
Properties	2-17
Entering Information.	2-18
Entering Information Using Keypad	2-18
Entering Information Using the Keyboard Input Panel	2-18
Entering Data via the Bar Code Scanner	2-18

Data Capture	2-19
Laser Scanning	2-19
Scan LED Indicators	2-19
Scanning Considerations	2-20
Laser Decode Ranges	2-20
Imaging	2-22
Imager	2-22
Operational Modes	2-22
Decode Mode	2-22
Image Capture	2-22
Aiming the Mobile Computer	2-22
Imager Decode Ranges	2-24
Resetting the Mobile Computer	2-26
Performing a Warm Boot	2-26
Performing a Cold Boot	2-26
Waking the Mobile Computer	2-27
File System Directory Structure	2-28
Connecting to the Internet on a Wireless Network	2-29

Introduction

This chapter provides basic instructions for using the mobile computer and navigating the mobile computer software.

Power Button

Press the red **Power** button to toggle the mobile computer between suspend and resume. When the screen is off the mobile computer is in suspend mode and when the screen is on the mobile computer is on.

Keypads

The mobile computer is available with the following keypad configurations:

- 28-key keypad
- 38-key keypad
- 48-key keypad.



For information about using the soft keyboard input panel. For more information, see [Entering Information Using the Keyboard Input Panel on page 2-19](#).

Keypad Special Functions

The keypad special functions are color coded on the keypads. For example, on the 38-key keypad, the display contrast icon is blue indicating that the blue function key must be selected first along with the F6 key, to increase the display contrast.

Table 2-1. Keypad Special Functions

Icon	28-Key Keystrokes	38-Key Keystrokes	48-Key Keystrokes	Special Function
	Blue function key and period .	Blue function key and F6	Blue function key and N	Increases display contrast setting, darkens the display (on monochrome units only).
	Blue function key and BKSP .	Blue function key and F9	Blue function key and S	Decreases display contrast setting, lightens the display (on monochrome units only).
	Blue function key and the up arrow.	Blue function key and F7	Blue function key and R	Increases scan decode beeper volume.
	Blue function key and down arrow.	Blue function key and F10	Blue function key and W	Decreases scan decode beeper volume.



Mobile computers with color screens do not have contrast settings.

28-Key Keypad

The 28-key keypad contains a **Power** button, application keys, scroll keys and function keys. The keypad is color-coded to indicate the alternate function key (blue) values and the alternate **ALPHA** key (orange) values. Note that keypad functions can be changed by an application so the mobile computer keypad may not function as described. See [Table 2-2 on page 2-5](#) for key and button descriptions and [Table 2-1 on page 2-3](#) for the keypad special functions.



Figure 2-1. 28-Key Keypad

Table 2-2. 28-Key Descriptions























Key	Description
Power (red) 	Powers the mobile computer screen on and off (resume and suspend).
Green Circle 	Programmable application function key by default.
Red Circle 	Programmable application function key by default.
Scan (yellow) 	Used in scanning applications, press to scan a bar code. This key has the same function as activating the side mounted scan buttons.
Scroll Up and Down 	Moves up and down from one item to another. Increases/decreases specified values.
Scroll Left and Right 	Moves left and right from one item to another. Increases/decreases specified values. Produces a TAB when the blue FUNC key is activated and the right arrow key is pressed.
ESC 	Produces the ESC function by default.
CTRL 	Press and release the CTRL key to activate the keypad alternate CTRL functions. The  icon appears on the taskbar. Press and release the CTRL key again to return to the default keypad functions.
Numeric/Alpha/Special Function  	Numeric, alpha or special function keys. Numeric by default. Produces a special function when the blue FUNC key is activated. Produces alpha values when the orange ALPHA key is activated. In Alpha state, produces the lower case alphabetic characters on the key. Each key press produces the next alphabetic character in sequence. For example, press and release the ALPHA key and then press the 4 key once to produce the letter 'g'; press and release the ALPHA key and then press the 4 key three times to produce the letter 'i'. When the SHIFT key is pressed in Alpha state, the upper case alphabetic characters on the key are produced. For example, press and release the ALPHA key, press and hold the SHIFT key and then press the 4 key once to produce the letter 'G'; press and release the ALPHA key, press and hold the SHIFT key and then press the 4 key three times to produce the letter 'I'.
Period/Decimal Point 	Produces a period for alpha entries and a decimal point for numeric entries by default. Produces the F10 function when the blue FUNC function key is activated.
Enter 	Executes a selected item or function.

Table 2-2. 28-Key Descriptions (Continued)

Key	Description
BKSP 	BKSP , backspace function by default.
SPACE 	SPACE , space function by default.
Shift 	Press and release the SHIFT key to activate the keypad alternate SHIFT functions. The  icon appears on the taskbar. Press and release the SHIFT key again to return to the default keypad functions.
ALPHA (orange) 	Press the orange ALPHA key to access the alternate ALPHA characters (shown on the keypad in orange). The  icon appears on the taskbar. Press and release the orange ALPHA key again to return to the default keypad functions.
FUNC (blue) 	Press and release the blue FUNC key to activate the keypad alternate functions (shown on the keypad in blue). The  icon appears on the taskbar. Press and release the blue function key again to return to the default keypad functions.
Display backlight 	Display backlight. Toggle the display backlight on and off using the display backlight key.

38-Key Keypad

The 38-key keypad contains a **Power** button, application keys, scroll keys and function keys. The keypad is color-coded to indicate the alternate function key (blue) values. Note that keypad functions can be changed by an application so the mobile computer keypad may not function as described. See [Table 2-3 on page 2-8](#) for key and button descriptions and [Table 2-1 on page 2-3](#) for the keypad special functions.

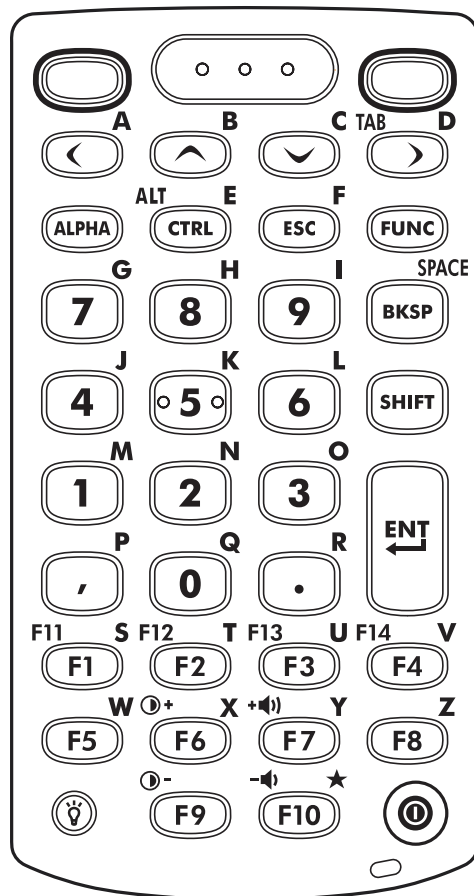


Figure 2-2. 38-Key Keypad

Table 2-3. 38-Key Descriptions





















Key	Description
Power (red) 	Powers the mobile computer screen on and off (resume and suspend).
Green Circle 	Programmable application function key by default.
Red Circle 	Programmable application function key.
Scan (yellow) 	Used in scanning applications, press to scan a bar code. This key has the same function as activating the side mounted scan buttons.
Scroll Left and Right 	Moves left and right from one item to another by default. Press the orange ALPHA key to access the A and D characters. Produces a TAB when the blue FUNC key is activated and the right arrow key is pressed.
Scroll Up and Down 	Moves up and down from one item to another by default. Produces alpha values when the orange ALPHA key is activated.
ALPHA (orange) 	Press the orange ALPHA key to access the alternate ALPHA characters (shown on the keypad in orange). The ALP icon appears on the taskbar. Press and release the orange ALPHA key again to return to the default keypad functions.
CTRL 	Press and release the CTRL key to activate the keypad alternate CTRL functions. The  icon appears on the taskbar. Press and release the CTRL key again to return to the default keypad functions.
CLEAR 	Press the CLEAR key to clear the input.
FUNC (blue) 	Press and release the blue FUNC key to activate the keypad alternate functions (shown on the keypad in blue). The F icon appears on the taskbar. Press and release the blue FUNC key again to return to the default keypad functions.
Numeric/Alpha/Special Function 	Press for the default numeric value. Produces alpha values when the orange ALPHA key is activated.
BKSP/SPACE 	BKSP , backspace function by default. Produces the SPACE function when the orange ALPHA key is activated.
SHIFT 	Press and release the SHIFT key to activate the keypad alternate SHIFT functions. The  icon appears on the taskbar. Press and release the SHIFT key again to return to the default keypad functions.

Table 2-3. 38-Key Descriptions (Continued)

Key	Description
Enter 	Executes a selected item or function.
Period/Decimal Point 	Produces a period for alpha entries and a decimal point for numeric entries. Produces alpha values when the orange ALPHA key is activated.
Comma 	Produces a comma by default. Produces alpha values when the orange ALPHA key is activated.
Special Function/Alpha 	Special function by default or when the blue FUNC key is activated. Produces alpha values when the orange ALPHA key is activated.
Display backlight 	Use the display backlight key to toggle the display backlight on and off.

48-Key Keypad

The 48-key keypad contains a **Power** button, application keys, scroll keys and function keys. The keypad is color-coded to indicate the alternate function key (blue) values. Note, that keypad functions can be changed by an application so the mobile computer keypad may not function as described. See [Table 2-3 on page 2-8](#) for key and button descriptions and [Table 2-1 on page 2-3](#) for the keypad special functions.

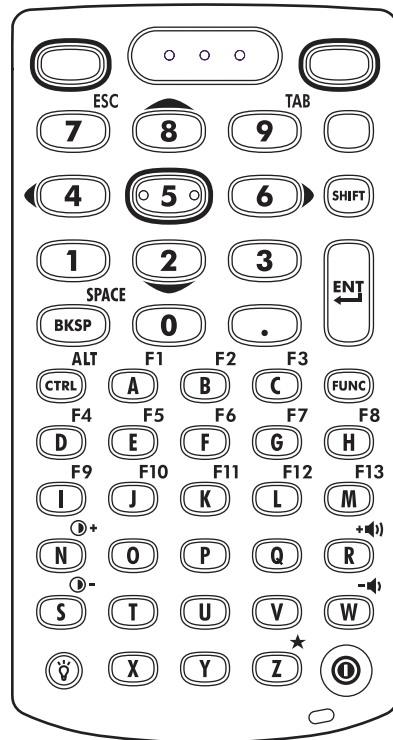


Figure 2-3. 48-Key Keypad

Table 2-4. 48-Key Descriptions


















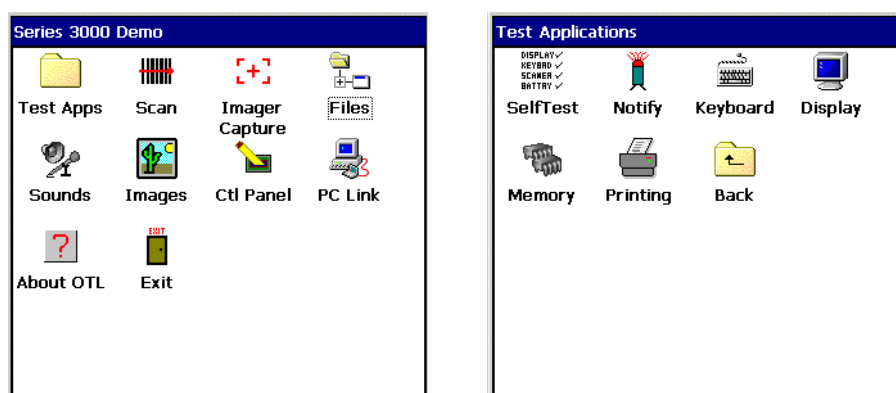
Key	Description
Power (red) 	Powers the mobile computer screen on and off (resume and suspend).
Green Circle/ESC 	Unassigned application function key by default.
Red Circle/TAB 	Unassigned application function key.
Scan (yellow) 	Scan key, used for scanning applications. This key has the same function as pulling the trigger.
Orange 	Press the orange key to access the alternate navigation and selection functions. The ALT icon appears on the taskbar. Press and release the orange key again to return to the default keypad functions.
Numeric/Scroll/Select 	Numeric, scroll, select keys. Numeric by default. With the orange key activated, the 2 , 4 , 6 , and 8 keys produce scroll functions and the 5 key produces a select function. With the FUNC key activated, 7 produces the ESC function and 9 produces the TAB function.
Shift 	Press and release the SHIFT key to activate the keypad alternate SHIFT functions. The  icon appears on the taskbar. Press and release the SHIFT key again to return to the default keypad functions.
Enter 	Executes a selected item or function.
BKSP/SPACE 	BKSP , backspace function by default. Produces the SPACE function when the blue FUNC key is activated.
Period/Decimal Point 	Produces a period for alpha entries and a decimal point for numeric entries.
Control 	Press and release the CTRL key to activate the keypad alternate CTRL functions. The  icon appears on the taskbar. Press and release the CTRL key again to return to the default keypad functions. Press and release the blue FUNC key and then the CTRL key to activate the ALT functions. The  icon appears on the taskbar. Press and release the CTRL key two times to return to the default keypad functions.
Alpha/Special Function 	Alpha by default. Special function by default when the blue FUNC key is activated.
FUNC (blue) 	Press and release the blue FUNC function key to activate the keypad alternate functions (shown on the keypad in blue). The F icon appears on the taskbar. Press and release the blue FUNC function key again to return to the default keypad functions.

Table 2-4. 48-Key Descriptions (Continued)

Key	Description
Display Backlight 	Display backlight. Toggle the display backlight on and off using the display backlight key.

Series 3000 Demo Window

On initial power up (or on a warm or cold boot) the *Series 3000 Demo* window appears. This window links to the *Test Applications* window and the two windows provide the sample/demo applications. The sample/demo applications are intended to be used by application developers as application development examples. These applications were not developed to support end users. Refer to the *Symbol Application Guide* for the *Series 3000 Demo* window applications.



Series 3000 Demo Window

Test Applications Window

Figure 2-4. Series 3000 Demo Window



The *Series 3000 Demo* window is the factory default launcher menu. Application specific shells may vary.

Desktop Window

To access the desktop tap the *Exit* icon on the *Series 3000 Demo* window or tap the *Desktop Display* button. See [Figure 2-6 on page 2-14](#) for the *Desktop Display* button location. The Desktop window displays the applications available with the Windows CE .NET 4.2 Professional and with the Windows CE .NET 4.2 Core configurations. For information on using the Microsoft® Applications refer to the *Microsoft® Applications User Guide for Symbol Devices*, p/n 72E-68197-xx.



Windows CE .NET 4.2 Professional

Windows CE .NET 4.2 Core Desktop

Figure 2-5. Series 3000 Desktop Window

Taskbar

The taskbar (at the bottom of the screen) displays the **Start** button, active programs, battery status and communication status. The taskbar icons are described in [Table 2-5](#). The taskbar icons display the function status, indicate what programs are active and indicate the battery charge status. The Taskbar buttons are used to access menus, select/deselect functions or to change display windows.

- Status Icons: The status icons indicate the function key status. If the **FUNC**, **SHIFT**, **CTRL**, **ALT** or **ALPHA** functions are active the appropriate status icon is displayed.
- Active Programs Icons: The active applications’ icons are displayed on the taskbar. If more than one program is active, icons can be used to toggle between the open programs (applications). Tap on a taskbar application to maximize the application.
- AC Power/Battery Status Icons: The AC Power/Battery Status icons are shown in the taskbar to indicate the present power supply status of the mobile computer. The main battery status icons provide the battery status in 10% increments from 10% to 100%. The backup battery low icon indicates that the backup battery charge is low. See [Battery Charging on page 1-8](#) for backup battery charging instructions.

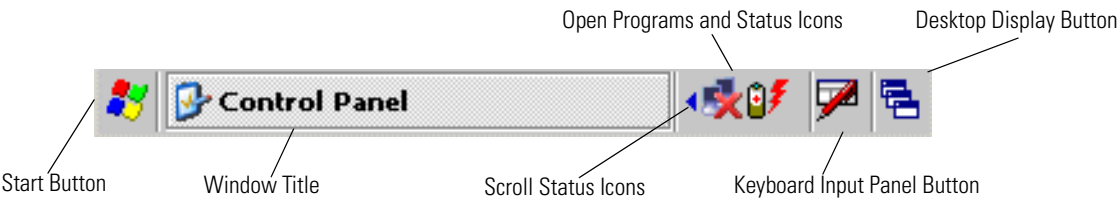




Figure 2-6. Taskbar

Table 2-5. Taskbar Icons

Icon	Description
	Indicates that the battery is charging.
	Indicates that the battery is fully charged (100% charged). The battery status icons provide the battery status in 10% increments from 10% to 100%.
	The Battery Unknown icon indicates that communication with the smart battery has not been established. After a mobile computer reset, this icon may be displayed for up to 30 seconds. See, Battery Unknown Icon on page 2-15 for additional information.
	Indicates that the backup battery is low.
	Indicates that the battery is fully charged and the mobile computer is running on external power.
	Indicates IP status. Only displays when the mobile computer is in emulation mode.
	Indicates that the ActiveSync application is running.
	Indicates that the Wireless Zero Configuration (WZC) radio is connected to a wireless network.
	Indicates that the Wireless Zero Configuration (WZC) radio is not connected to a wireless network.
	Use the scroll arrows to scroll left or right to reveal hidden program and status icons.

Table 2-5. Taskbar Icons (Continued)

Icon	Description
	Indicates that the SHIFT button function is selected.
F	Indicates that the FUNC button function is selected.
	Indicates that the CTRL button function is selected.
ALT	Indicates that the ALT character selection is selected.
ALP	Indicates that the mobile computer is in ALPHA button mode is selected.

Battery Unknown Icon

The Battery Unknown icon is displayed when communication with the smart battery has not been established. As part of normal operation this icon may be displayed for 30 seconds following a mobile computer reset.

If the icon is displayed beyond this 30 second period:

1. Remove and re-seat the battery.
2. If after re-seating the battery, the icon remains, warm boot the mobile computer.
3. If after warm booting the mobile computer, the icon remains, then cold boot the mobile computer.
4. If after cold booting the mobile computer, the icon remains, install a new (tested and working) battery.
5. If the icon remains, return the mobile computer for servicing.

Start Button

Tap the **Start** button to launch the *Start* menu.

- *Programs*: Use to access available programs.
- *Favorites*: Displays files in *Favorites* directory.
- *Documents*: Displays files in *Documents* directory.
- *Settings*: Accesses the Control Panel, the Network and Dial-up Connections and the Taskbar and *Start* menu.
- *Help*: Accesses the Windows CE Help. Not available on mobile computers running Windows CE .NET 4.2 Core.
- *Run . . .*: Runs a program or application.
- *Suspend*: Places the mobile computer in the suspend state.






Figure 2-7. Start Menu

Programs Menu

- From the *Start* menu, tap *Programs* to launch the *Programs* menu. The programs provided with Windows CE .NET 4.2 Professional and Windows CE .NET 4.2 Core are displayed in the *Programs* menu. Refer to the *Symbol Application Guide*, p/n 72-68901-xx and the *Microsoft® Applications User Guide for Symbol Devices*, p/n 72E-68197-xx for application information.

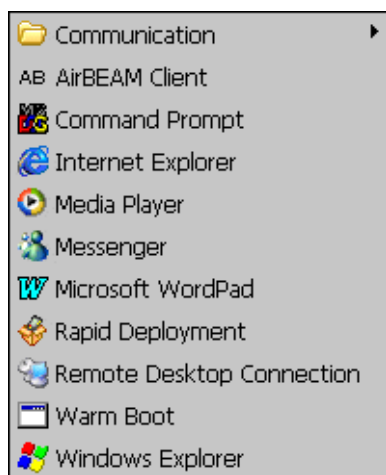

Windows CE .NET 4.2 Professional

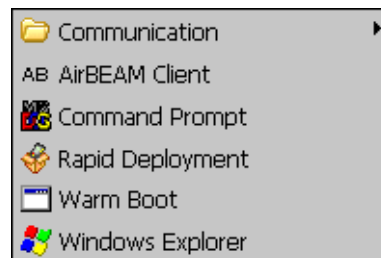

Windows CE .NET 4.2 Core

Figure 2-8. Programs Menu

Keyboard Input Panel Button

Use the Keyboard Input Panel as an alternate input device. For more information, see [Entering Information Using the Keyboard Input Panel on page 2-19](#).

Desktop Display Button

Use the *Desktop Display* button to minimize all open programs and display the desktop.

Windows CE .NET 4.2 Core desktop functions include:

- *My Computer*: Double-tap the icon to open My Computer.
- *Recycle Bin*: Deleted files remain in the recycle bin until the recycle bin is emptied. Once emptied the files cannot be retrieved.

Windows CE .NET 4.2 Professional desktop functions include:

- *My Computer*: Double-tap the icon to open My Computer.
- *Recycle Bin*: Deleted files remain in the recycle bin until the recycle bin is emptied. Once emptied the files cannot be retrieved.
- *Remote Desktop Connection*: Tap the *Remote Desktop Connection* icon to access the *Remote Desktop Connection* window.

Task Manager and Properties

Use the Task Manager to control an application's use and use the *Properties* functions to set display and clock options.

Task Manager

1. Select **FUNC - CTRL**, (to activate the **ALT** state) and tap on the taskbar to display the *Task Manager, Properties Selection* menu.




Figure 2-9. Task Manager, Properties Selection Menu

2. Tap *Task Manager* to display the Task Manager window.

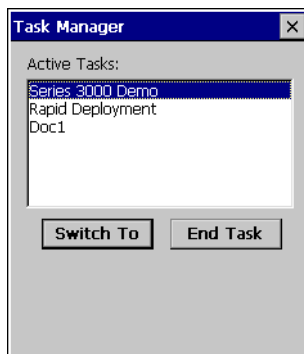


Figure 2-10. Task Manager Window

3. Tap a task in the *Active Tasks* list and tap **Switch To** to make that task the primary task, or tap **End Task** to end the selected task.
4. Tap **X** to exit the *Task Manager* window.

Properties

1. Select **FUNC - CTRL**, (to activate the ALT state) and tap on the taskbar to display the Task Manager, Properties window, see [Figure 2-9 on page 2-17](#).
2. Tap *Properties* to display the *Taskbar and Start Menu, General* tab.
3. This menu provides taskbar options:
 - Check the *Always on Top* checkbox to keep the taskbar on top of all other windows.
 - Check the *AutoHide* checkbox to make the taskbar disappear, touch the bottom of the display to make the taskbar return.
 - Check the *Show Clock* checkbox to display the clock on the taskbar.
4. Tap **OK** to save the settings and exit the window.



Figure 2-11. Taskbar and Start Menu, General Tab

Advanced Tab

1. Tap the *Advanced* tab to enter the *Taskbar and Start Menu, Advanced* tab.
2. Tap the **Clear** button to delete all of the documents listed in the *Start - Documents* entry, see [Start Button on page 2-16](#). Typically this list is empty, but if there were documents in the list the **Clear** button would delete them.
3. Tap the *Expand Control Panel* checkbox to display the entire contents of the MS control panel in list form, rather than icons.



Figure 2-12. Taskbar and Start Menu, Advanced Tab

4. Tap **OK** to save the settings and exit the window.

Entering Information


To enter information:

- Use the keypad.
- Use the keyboard input panel (soft keyboard) to enter typed text.
- Scan bar code data into data fields.
- Use Microsoft® ActiveSync® to synchronize or copy information from the host computer to the mobile computer. For more information on ActiveSync, refer to the *MC3000 Integrator Guide*.

Entering Information Using Keypad

The alphanumeric keypads produce the 26-character alphabet (A-Z), numbers (0-9), function keys and assorted characters. The keypads default characters/functions are printed black or white, the **ALPHA** character/functions are printed orange and the **FUNC** character/functions are printed blue. See [Keypads on page 2-3](#) for keypad configurations, see [Table 2-1 on page 2-3](#) for keypad special functions and see [Table B-1 on page B-4](#) for the special character generation.

Entering Information Using the Keyboard Input Panel

Use the keyboard input panel (soft keyboard) to enter information in any program. To launch the keyboard input panel, tap the  button on the Taskbar. Tap a key to enter the key's value. Tap the keyboard input panel button to display or to hide the keyboard input panel.

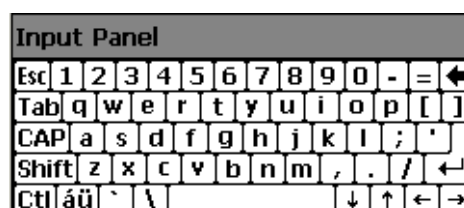


Figure 2-13. Keyboard Input Panel

Entering Data via the Bar Code Scanner

The sample bar code scanner application scans data into data fields in the same way data is entered via the keypad.

Data Capture

The mobile computer has an integrated scanner or imager that is used to collect data by scanning bar codes.

Laser Scanning

To scan bar codes with the mobile computer:

- 1. Ensure that the mobile computer is loaded with a scanning application.
- 2. If the mobile computer is equipped with a rotating head, adjust the head prior to scanning.
- 3. Aim the scan window at the bar code.
- 4. Press the scan button. Ensure the red scan beam covers the entire bar code. The Scan LED Indicators illuminate red to indicate that the laser is on. The Scan LED Indicators illuminate green and a beep sounds to indicate a successful decode.

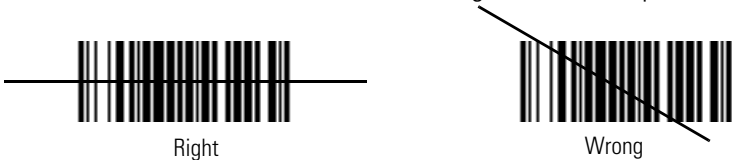


Figure 2-14. Laser Aiming

Optimal scanning distance varies with bar code density and scanner optics.

- Hold the scanner farther away for larger symbols.
- Move the scanner closer for symbols with bars that are close together.



Scanning procedures depend on the application and mobile computer configuration. An application may use different scanning procedures from the one listed above.

Scan LED Indicators

The red/green Scan LED Indicators (located in the Indicator LED Bar and in the rotating turret) indicates the scan status. For the location of the Scan LED Indicators see, [Figure 1-1 on page 1-5](#).

Table 2-6. Scan LED Indicators

LED Status	Indication
Off	Not scanning.
Solid Red	Laser enabled, scanning in process.
Solid Green	Successful decode.

Scanning Considerations

Scanning consists of; aim, scan and decode. Scanning performance can be optimized by considering the range and the scanning angle:

- Range

Any scanning device decodes well over a particular working range — minimum and maximum distances from the bar code. This range varies according to bar code density and scanning device optics.

Scanning within range brings quick and constant decodes; scanning too close or too far away prevents decodes. Move the scanner closer and further away to find the right working range for the bar codes being scanned. However, the situation is complicated by the availability of various integrated scanning modules. The best way to specify the appropriate working range per bar code density is through a chart called a decode zone for each scan module. A decode zone simply plots working range as a function of minimum element widths of bar code symbols.

- Angle

The scan angle is important for optimizing decode performance. When laser beams reflect directly back into the scanner from the bar code, this specular reflection can “blind” the scanner.

To avoid this, scan the bar code so that the beam does not bounce directly back. But don’t scan at too sharp an angle; the scanner needs to collect scattered reflections from the scan to make a successful decode. Practice quickly shows what tolerances to work within.



Contact the Symbol Support Center if chronic scanning difficulties develop. Decoding of properly printed bar codes should be quick and effortless.

Laser Decode Ranges

The decode ranges provide the decode ranges for barcodes of specified densities. [Figure 2-15](#) shows the laser decode ranges and [Table 2-7 on page 2-22](#) lists the scan ranges for the selected bar code densities. The minimum element width (or “symbol density”) is the width in mils of the narrowest element (bar or space) in the symbol. The maximum usable length of a symbol at any given range is shown below.

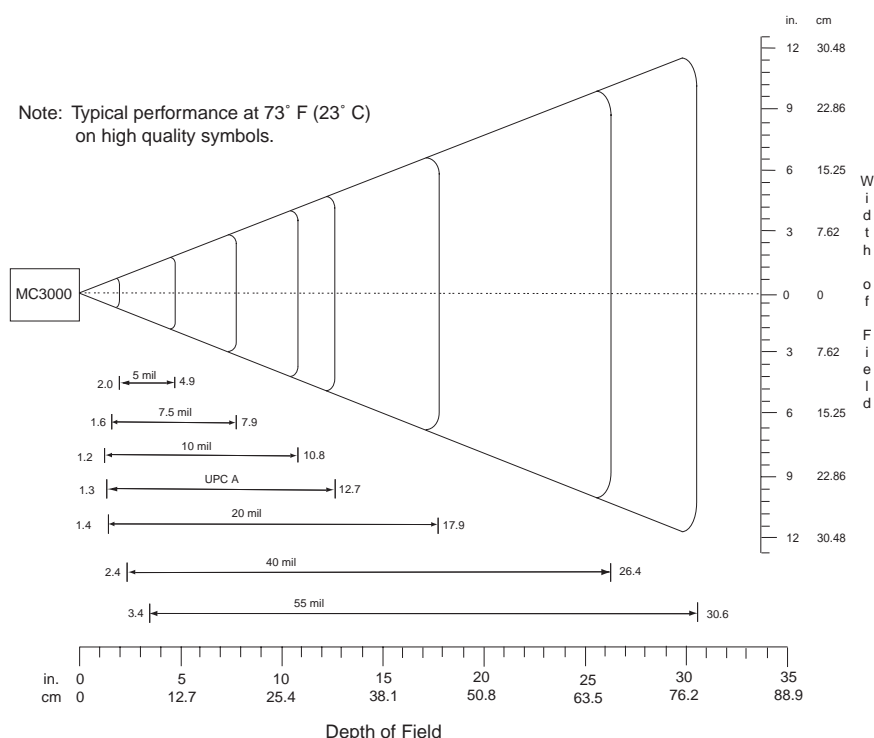


Figure 2-15. MC3000 Laser Decode Ranges

Table 2-7. MC3000-R, Laser Decode Ranges

Bar Code Density	Ranges	
	Near	Far
5.0 mil	2.0 in 5.08 cm	4.9 in 12.45 cm
7.5 mil	1.6 in 4.06 cm	7.9 in 20.07 cm
10 mil	1.2 in 3.05 cm	10.8 in 67.95cm
UPC A	1.3 in 3.30 cm (Note 2)	12.7 in 32.26 cm
20 mil	1.4 in 3.56 cm (Note 2)	17.9 in 45.47 cm
40 mil	2.4 in 6.10 cm (Note 2)	26.4 in 67.06 cm
55 mil	3.4 in 8.64 cm (Note 2)	30.6 in 77.72 cm

Imaging

The imager version of the mobile computer has the following features:

- Omnidirectional reading of a variety of bar code symbologies, including the most popular linear, postal, PDF417 and 2-D matrix code types.
- The ability to capture and download images to a host for a variety of imaging applications.
- Advanced intuitive laser aiming for easy point-and-shoot operation.

Imager

The imager uses digital camera technology to take a digital picture of a bar code, the image is stored in memory and software decoding algorithms are executed to extract the data from the image. A typical bar code decoding process is as follows:

1. Aim the mobile computer at a bar code and press the scan button.
2. The red laser aiming pattern turns on to assist in aiming the mobile computer.
3. The mobile computer turns on the secondary white LEDs to illuminate the target bar code.
4. The mobile computer takes a digital picture (image) of the bar code and stores it in memory for decoding. A beep sounds to indicate that the bar code was properly decoded.
5. Release the scan button.

This process usually occurs instantaneously. Steps 2 - 4 are repeated on poor or difficult bar codes as long as the scan button remains active.

Operational Modes

The imager version of the mobile computer has two modes of operation: Decode Mode and Image Capture Mode. Refer to the *Symbol Application Guide* for the *Series 3000 Demo* imager application.

Decode Mode

Activate the scan button, the mobile computer attempts to locate and decode enabled bar codes within its field of view. The mobile computer remains in this mode as long as the scan button remains activated, or until the bar code is decoded.

Image Capture

The imager version of the mobile computer allows image capture. In this mode, the imager displays an image until the image is snapped. The snapped image can then be saved.

Aiming the Mobile Computer

The imager version of the mobile computer projects a laser aiming pattern (shown below) similar to those used on cameras. The aiming pattern is used to position the bar code or object within the field of view.




Figure 2-16. Laser Aiming Pattern

To scan a symbol using the imager:

1. Center the symbol in any orientation within the aiming pattern. Ensure the entire symbol is within the rectangular area formed by the brackets in the aiming pattern.

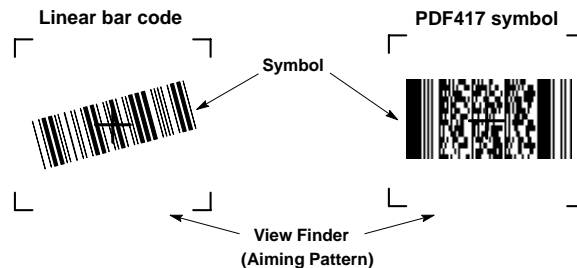


Figure 2-17. Centering Symbol in Aiming Pattern

The imager can also read a bar code presented within the aiming pattern but not centered, such as the figure below on the left. The figure on the right, however, can not be decoded.

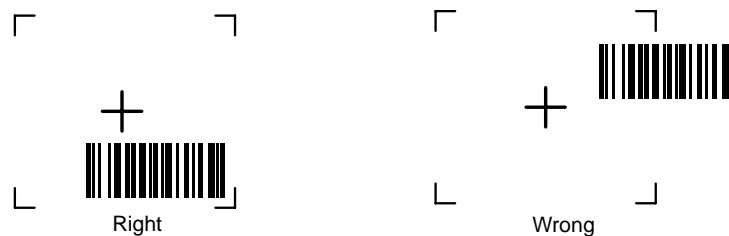


Figure 2-18. Imager Aiming

2. The aiming pattern is smaller when the Imager is closer to the symbol and larger when it is farther from the symbol. Scan symbols with smaller bars or elements (mil size) closer to the unit and those with larger bars or elements (mil size) farther from the unit.
3. Hold the mobile computer between two and nine inches (depending on symbol density) from the symbol, centering the aiming pattern cross hairs on the symbol.
4. Press the scan button. The Scan LED Indicators illuminate red to indicate that the laser is on. The Scan LED Indicators illuminate green and a beep sounds to indicate a successful decode.

Imager Decode Ranges

The decode ranges provide the decode distances for barcodes of specified densities. Figure 2-19 shows the imager decode ranges and Table 2-8 on page 2-26 lists the scan ranges for the selected bar code densities. The minimum element width (or “symbol density”) is the width in mils of the narrowest element (bar or space) in the symbol. The maximum usable length of a symbol at any given range is shown below.

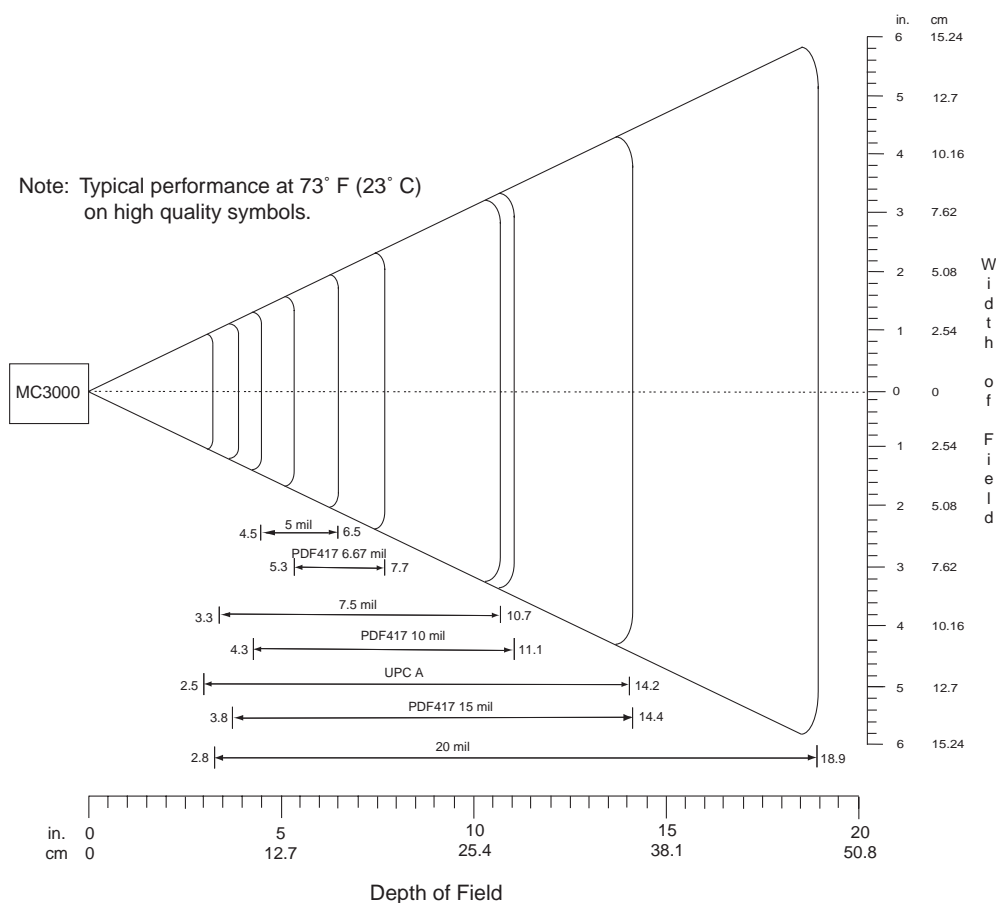


Figure 2-19. MC3000 Imager Decode Ranges

Table 2-8. MC3000-K, Imager Decode Ranges

Bar Code Density	Ranges	
	Near	Far
5.0 mil	4.5 in 11.43 cm	6.5 in 16.51cm
7.5 mil	3.3 in 8.38 cm	10.7 in 27.18 cm
UPC A	2.5 in 6.35 cm	14.2 in 36.07cm
20 mil	2.8 in 7.11 cm	18.9 in 48.01 cm
PDF417 6.67 mil	5.3 in 13.46 cm	7.7 in 19.56 cm
PDF417 10 mil	4.3 in 10.92 cm	11.1 in 28.19 cm
PDF417 15 mil	3.8 in 9.65 cm	14.4 in 36.58 cm

Resetting the Mobile Computer

If the mobile computer stops responding to input, reset it. There are two reset functions, warm boot and cold boot. A warm boot restarts the mobile computer by closing all running programs. All data that is not saved is lost.

A cold boot also restarts the mobile computer, but erases all stored records and entries from RAM. In addition it returns formats, preferences and other settings to the factory default settings.

Perform a warm boot first. If the mobile computer still does not respond, perform a cold boot.

Performing a Warm Boot

To perform a warm boot:

1. Press and simultaneously hold **7**, **9** and **Power**. Do not hold down any other keys or buttons.
2. As the mobile computer initializes MC3000 demo window appears.



CAUTION

Files that remain open during a warm boot may not be retained.

Performing a Cold Boot

A cold boot restarts the mobile computer and erases all user stored records and entries from RAM. *Never perform a cold boot unless a warm boot does not solve the problem.*



CAUTION

Cold boot resets the mobile computer, to the default settings. All added applications and all stored data are removed. Do not cold boot without support desk approval.

To perform a cold boot:

1. Press and simultaneously hold the **1**, **9** and **Power** keys. Do not hold down any other keys or buttons. As the mobile computer initializes, the Symbol splash window, [Figure 1-5 on page 1-10](#), appears for about a minute.
2. Calibrate the touch screen. See [Calibration Screen on page 1-10](#) to calibrate the mobile computer screen.

Waking the Mobile Computer

The default wakeup conditions define what actions wakeup the mobile computer. These settings are configurable and the factory default settings shown in [Table 2-9](#) are subject to change/update.

Table 2-9. Default Wakeup Conditions

Status	Description	Conditions for Wakeup
Power Off	When the mobile computer is set to the suspend mode by pressing Power , these actions wake the mobile computer.	1. Power button is pressed.
		2. AC power added or removed.
		3. Cradle/cable connect or disconnect.
		Any key or the Scan button , is pressed.
Auto Off	When the mobile computer goes into suspend mode by an automatic power-off function, these actions wake the mobile computer.	Wireless LAN accesses the mobile computer.
		Real Time Clock set to wake up.
		1. Power button is pressed.
		2. AC power added or removed.
		3. Cradle/cable connect or disconnect.
		Any key or the Scan button , is pressed.
		Wireless LAN accesses the mobile computer.
		Real Time Clock set to wake up.

File System Directory Structure

The mobile computer directory structure displays all of the file folders. The pre-installed folders are in flash file system memory and optional removable storage devices (SD storage cards).

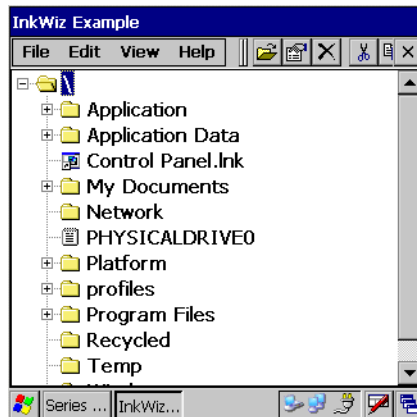


Figure 2-20. Mobile Computer Directory Structure

- *Application* and *Platform* folders are located in flash file system memory.
- The *Windows*, *Program Files*, *profiles*, and *My Documents* folders are composites, RAM based folders generated from ROM (many of these files are marked read only).
- The *Network* folder is a link to file systems mapped using the network redirector. The files do not physically reside on the mobile computer.
- The *Temp* and *Recycled* folders typically contain RAM based files.





All files copied to the RAM based folders are lost after a cold boot.

Connecting to the Internet on a Wireless Network

The mobile computer can connect to the Internet across a wireless network. Before attempting a wireless internet connection, confirm that the Wireless Zero Configuration (WZC) radio is connected to a wireless network. The WZC icon appears in the task bar and indicates the connected/not connected status. If the WLAN radio is not connected contact the Network Administrator.

Table 2-10. WZC Taskbar Icon Descriptions

Icon	Description
	WLAN radio is connected.
	WLAN radio is not connected.

To connect using Internet Explorer (IE):

Tap *Start - Programs - Internet Explorer* to start Internet Explorer.



IE is provided only on mobile computers provided with Microsoft® Windows CE .NET 4.2 Professional. IE is not provided on mobile computers with Microsoft® Windows CE .NET 4.2 Core.



Figure 2-21. Connect To Internet Explorer (IE)

If internet access is not available:

1. Double tap the WZC icon on the task bar.
2. The *Wireless Information* window displays the connected WLAN, the connection status and the signal strength. Configured wireless networks are listed as *preferred*. Table 2-11 lists the wireless network connection status icons and the connection status. Confirm with the Network Administrator that an Internet connection can be obtained through the connected wireless network.

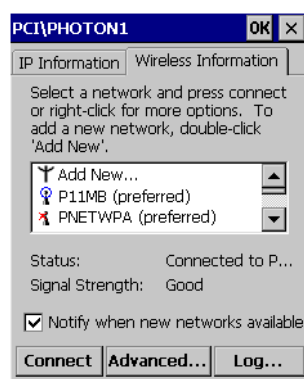









Figure 2-22. Wireless Information Tab

Table 2-11. Wireless Information Tab, Icon Descriptions

Icon	Description
	Add a new network.
	Available network.
	Connected to an available network.
	Network is not available.
	Available Ad Hoc network.
	Connected to an available Ad Hoc network.
	Ad Hoc network is not available.

Chapter Contents

Introduction	3-3
Cradles	3-3
Spare Battery Chargers	3-3
Cables	3-3
SD Card	3-3
Plastic Holster	3-3
Single Slot Serial/USB Cradle	3-4
Battery Charging	3-4
Four Slot Charge Only Cradle	3-6
Battery Charging	3-6
LED Charge Indications	3-6
Four Slot Spare Battery Charger	3-7
Spare Battery Charging	3-7
LED Charge Indications	3-7
Cables	3-8
Battery Charging and Operating Power	3-9
LED Charge Indications	3-9
Universal Battery Charger (UBC) Adapter	3-10
Spare Battery Charging	3-10
UBC Adapter LED Charge Indications	3-11
Secure Device Card	3-12
Plastic Holster	3-13
Using the Plastic Holster	3-14
Inserting and Removing the Mobile Computer	3-15
Fabric Holster	3-15

Introduction

The MC3000 accessories provide a variety of product support capabilities. Accessories include cradles, cables, spare battery chargers and SD cards.

Cradles

- Single Slot Serial/USB cradle charges the mobile computer main battery and/or a spare battery. It also synchronizes the mobile computer with a host computer through either a serial or a USB connection.
- Four Slot Charge Only cradle charges the mobile computer.

Spare Battery Chargers

- Four Slot Spare Battery Charger charges up to four MC3000 spare batteries.
- UBC Adapter adapts the UBC2000 for use with the MC3000 batteries.

Cables

The cables snap on to the mobile computer and are used to connect external devices to the mobile computer.

- USB Client Charge cable
- RS232 Charge cable
- O'Neil Printer cable
- Zebra Printer cable
- Monarch Printer cable.

SD Card

The SD card provides additional storage capacity for the mobile computer.

Plastic Holster

The Plastic Holster provides a clip on holder for the mobile computer.

Fabric Holster

The Fabric Holster provides a clip on holder for the mobile computer.

Single Slot Serial/USB Cradle

The Single Slot Serial/USB cradle:

- Provides 5.4VDC power for operating the mobile computer, charging the battery and charging a spare battery.
- Provides a serial port and a USB port for data communication between the mobile computer and a host computer or other serial devices (e.g., a printer).
- Synchronizes information between the mobile computer and a host computer. With customized or third party software, it can also synchronize the mobile computer with corporate databases.
- Provides serial connection through the serial pass-through port for communication with a serial device, such as a host computer. For communication setup procedures, refer to the *MC3000 Integrator Guide*.
- Provides USB connection through the USB pass-through port for communication with a USB device, such as a host computer. For communication setup procedures, refer to the *MC3000 Integrator Guide*.

Battery Charging

The Single Slot Serial/USB cradle can charge the mobile computer main battery and a spare battery simultaneously.

To charge the mobile computer:

1. Slide the mobile computer into the mobile computer slot. The mobile computer amber Charge LED Indicator, indicates the mobile computer battery charging status. The Standard Battery charges in less than four hours and the Extended Life Battery charges in less than six hours. See [Table 3-1](#) for charging status indications.

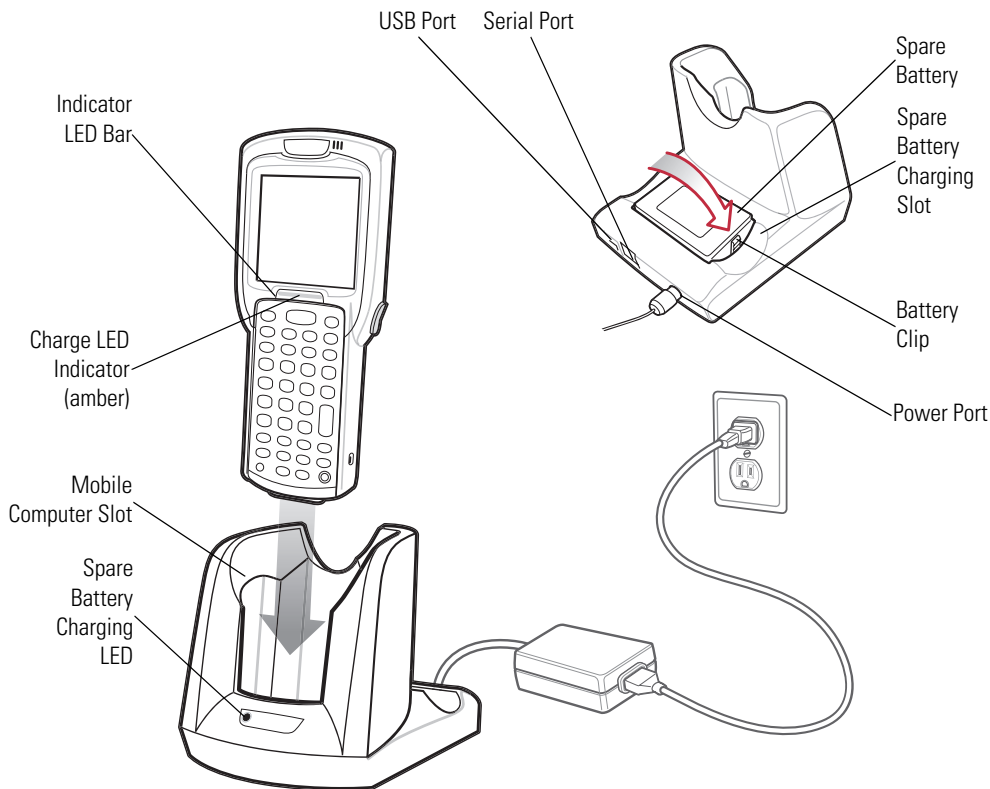


Figure 3-1. Single Slot Serial/USB Cradle

2. When charging is complete, remove the mobile computer from the mobile computer slot.

To charge the spare battery:

1. Insert the spare battery into the spare battery charging slot, bottom first, and pivot the top of the battery down onto the contact pins.
2. Gently press down on the battery to ensure proper contact.
3. The cradle's Spare Battery Charging LED (see [Figure 3-1 on page 3-4](#)) indicates the spare battery charging status. The Standard Battery charges in less than four hours and the Extended Life Battery charges in less than six hours. See [Table 3-1](#) for charging status indications.
4. When charging is complete, press the battery clip and lift the battery out of the slot.

LED Charge Indications

The Single Slot Serial/USB cradle uses the mobile computer amber Charge LED Indicator to indicate the battery charging status and the Spare Battery Charging LED to indicate spare battery charging status. See [Table 3-1](#) for charging status indications.

Table 3-1. LED Charging Status Indicators

LED	Indication
Mobile Computer Charging (LED on mobile computer)	
Off	Mobile computer not placed correctly in the cradle; cable not connected correctly; charger is not powered.
Fast Blinking Amber	Error in charging; check placement of mobile computer.
Slow Blinking Amber	Mobile computer is charging.
Solid Amber	Charging complete. Note: When the battery is initially inserted in the mobile computer, the amber LED flashes once if the battery power is low or the battery is not fully inserted.
Spare Battery Charging (LED on cradle)	
Off	No spare battery in slot; spare battery not placed correctly; cradle is not powered.
Fast Blinking Amber	Error in charging; check placement of spare battery.
Slow Blinking Amber	Spare battery is charging.
Solid Amber	Charging complete.

Four Slot Charge Only Cradle

The Four Slot Charge Only cradle:

- Provides 5.4VDC power for operating the mobile computer and charging the battery.
- Simultaneously charges up to four mobile computers.

Battery Charging

The Four Slot Charge Only cradle can charge up to four mobile computers simultaneously.

To charge the mobile computer:

1. Slide the mobile computer into the mobile computer slot.

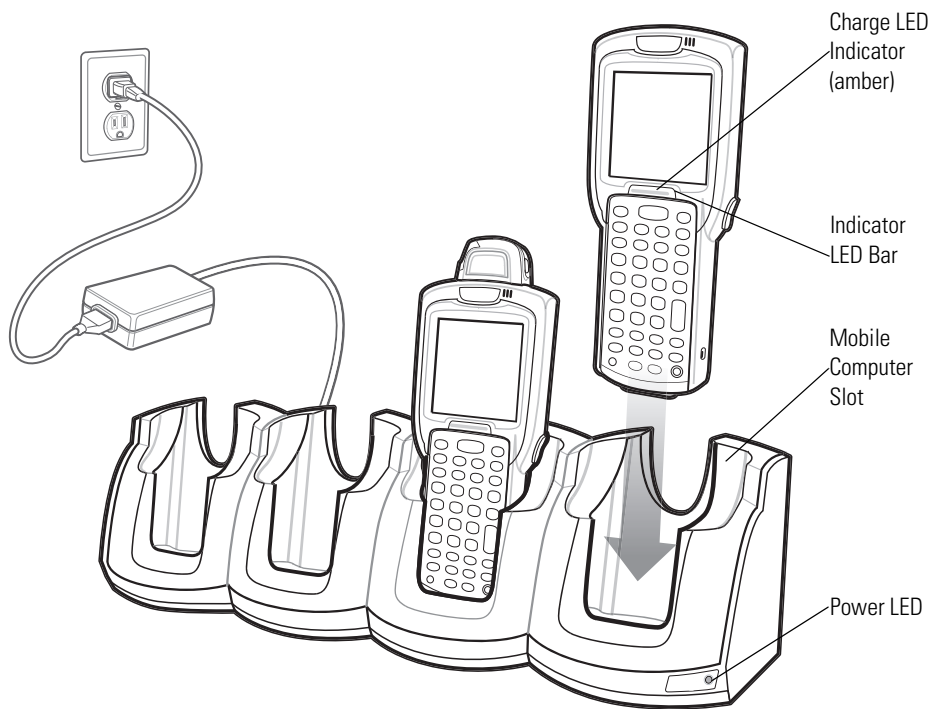


Figure 3-2. Four Slot Charge Only Cradle

2. The mobile computer amber Charge LED Indicator, indicates the mobile computer battery charging status. The Standard Battery usually charges in less than four hours and the Extended Life Battery usually charges in less than six hours. See [Table 3-1](#) for charging status indications.
3. When charging is complete, remove the mobile computer from the cradle.

LED Charge Indications

The Four Slot Charge Only cradle uses the mobile computer amber Charge LED Indicator to indicate the battery charging status. See [Table 3-1 on page 3-5](#) for charging status indications.

Four Slot Spare Battery Charger

The Four Slot Spare Battery Charger, simultaneously charges up to four spare batteries.

Spare Battery Charging

To charge up to four MC3000 spare batteries:

1. Insert the spare battery into the spare battery charging slot, bottom first
2. Pivot the top of the battery down onto the contact pins.

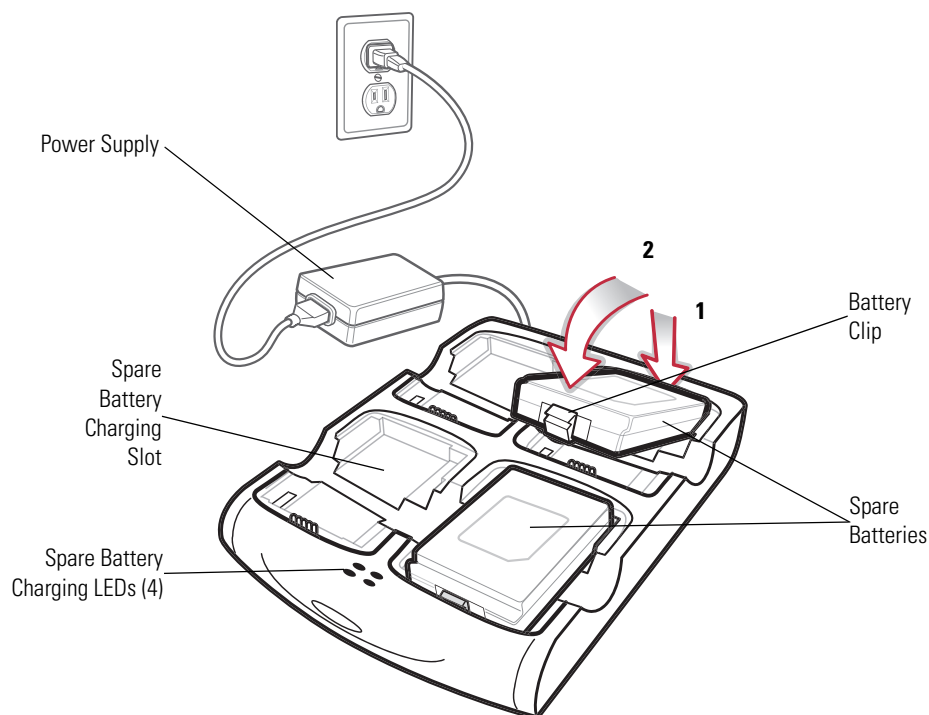


Figure 3-3. Four Slot Spare Battery Charger

3. Gently press down on the battery to ensure proper contact. The Standard Battery usually charges in less than four hours and the Extended Life Battery usually charges in less than six hours. See, [Table 3-1 on page 3-5](#) for charging status indications.
4. When charging is complete, press the battery clip and lift battery out of the slot.

LED Charge Indications

The Spare Battery Charging LEDs indicate the spare battery charging status. The Spare Battery Charging LEDs are arranged in the same pattern as the spare battery charging slots so that the charging status of each battery can be identified. See [Table 3-1 on page 3-5](#) for charging status indications.

Cables

This section describes how to setup and use the cables. The cables are available with a variety of connection capabilities.

The following MC3000 Communication/Charge cables are available:

- Serial (RS232) Charge cable (9-pin D female with power input receptacle)
- USB Client Charge cable (standard-A connector and a barrel receptacle for power)

The following printer cables are available directly from the printer manufacturer:

- O'Neil Printer cable
- Zebra Printer cable.

The following printer cable is available from Symbol:

- Monarch Printer cable

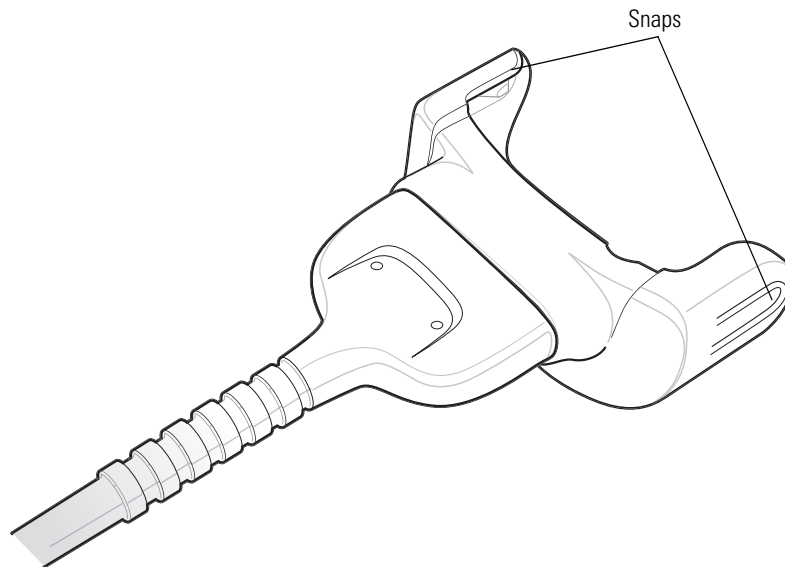


Figure 3-4. Cables

MC3000 Communication/Charge cables:

- Provide the mobile computer with operating and charging power when used with the Symbol approved power supply.
- Synchronize information between the mobile computer and a host computer. With customized or third party software, it can also synchronize the mobile computer with corporate databases.
- Provide serial connection through the serial pass-through port for communication with a serial device, such as a host computer. For communication setup procedures, refer to the *MC3000 Integrator Guide*.
- Provide USB connection through the USB pass-through port for communication with a USB device, such as a host computer. For communication setup procedures, refer to the *MC3000 Integrator Guide*.

Dedicated Printer cables, provide communication with a dedicated printer.

Battery Charging and Operating Power

The MC3000 Communication/Charge cables can charge the mobile computer battery and supply operating power.

To charge the mobile computer battery:

1. Connect the MC3000 Communication/Charge cable power input connector to the Symbol approved power source.
2. Slide the bottom of the mobile computer into the MC3000 connector end of the MC3000 Communication/Charge cable and gently press in until the snaps latch into the mobile computer.
3. The mobile computer amber Charge LED Indicator indicates the mobile computer battery charging status. The Standard Battery usually charges in less than four hours and the Extended Life Battery usually charges in less than six hours. See, [Table 3-1 on page 3-5](#) for charging status indications.
4. When charging is complete, remove the cable by gently pulling the mobile computer and the cable apart until the snaps release the mobile computer.

LED Charge Indications

The MC3000 Communication/Charge cables use the amber Charge LED Indicator to indicate the MC3000 battery charging status. See, [Table 3-1 on page 3-5](#) for charging status indications.

Universal Battery Charger (UBC) Adapter

The UBC Adapter can be used with a power supply as a standalone spare battery charger or it can be used with the four station UBC2000 to simultaneously charge up to four spare batteries. For additional information on the UBC 2000, refer to the *UBC 2000 Quick Reference Guide* p/n 70-33188-xx.

Spare Battery Charging

To charge spare batteries:

1. Insert the spare battery into the spare battery charging slot, bottom first.
2. Pivot the top of the battery down onto the contact pins.

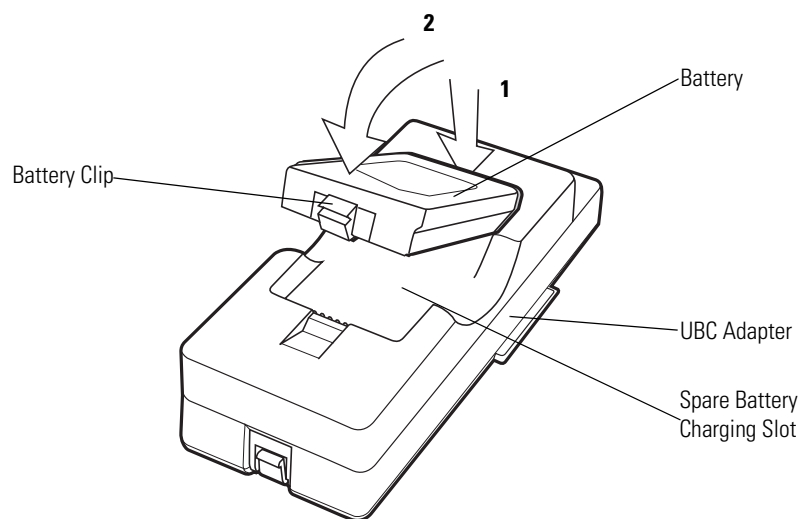


Figure 3-5. UBC Adapter Battery Insertion

3. Gently press down on the battery to ensure proper contact. The Standard Battery usually charges in less than four hours and the Extended Life Battery usually charges in less than six hours. See, [Table 3-2 on page 3-11](#) for charging status indications.
4. When charging is complete, press the battery clip and lift the battery out of the slot.

UBC Adapter LED Charge Indications

The UBC Adapter charging LEDs indicate the battery charging status. The Standard Battery usually charges in less than four hours and the Extended Life Battery usually charges in less than six hours.

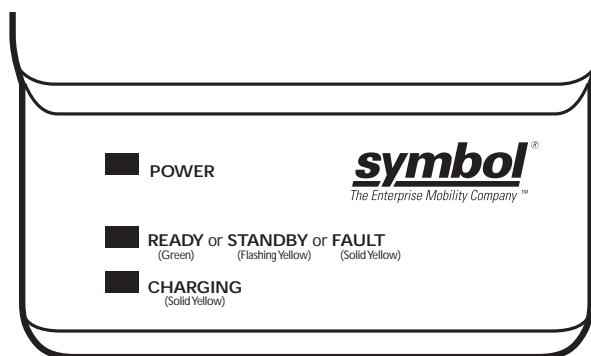


Figure 3-6. UBC Adapter LEDs

Table 3-2. UBC Adapter Charge LED Status Indications

LED	Indication	Description
POWER	Green	Power is connected to the UBC Adapter.
READY or STANDBY or FAULT	Green Flashing- Yellow Yellow	Charging complete. The battery was deeply discharged and is being trickle charged to bring the voltage up to the operating level. After operating level voltage is achieved, the battery charges normally. Charging error, check placement of mobile computer/spare battery.
CHARGING	Yellow	Normal charge.

Secure Device Card

The Secure Device (SD) card provides secondary non-volatile storage (the flash memory is slower than RAM). The SD card holder is located under the battery.



CAUTION

Follow proper Electro-Static Discharge (ESD) precautions to avoid damaging the SD card. Proper ESD precautions include, but are not limited to, working on an ESD mat and ensuring that the operator is properly grounded.

Do not use the SD card slot for any accessories other than a Symbol approved SD card.



The following Sandisk SD cards have been tested and qualified:

SDSDB-64-201-80 (64 meg)

SDSDB-128-201-80 (128 meg)

SDSDB-512-201-80 (512 meg)

To insert the SD card:

1. Remove the battery (see [Main Battery Removal on page 1-12](#)).
2. Lift the SD card retaining door.
3. Position the SD card, with the contacts down, into the SD card slot. The SD card corner notch fits into the slot only one way.
4. Snap the retaining door closed.

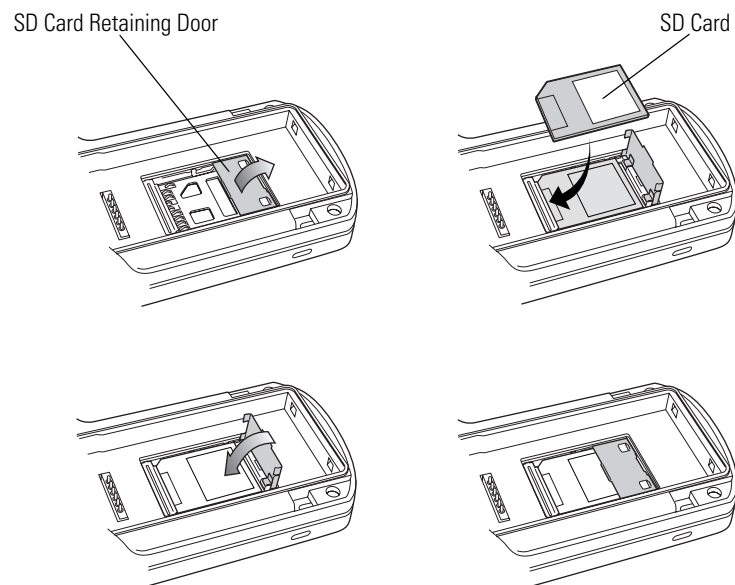


Figure 3-7. Inserting the SD card

5. Replace the battery (see [Install Main Battery on page 1-7](#)).

Plastic Holster

The Plastic Holster provides a holder for the mobile computer. It consists of a mobile computer holder and a detachable belt clip. Press the release button to remove the detachable belt clip.

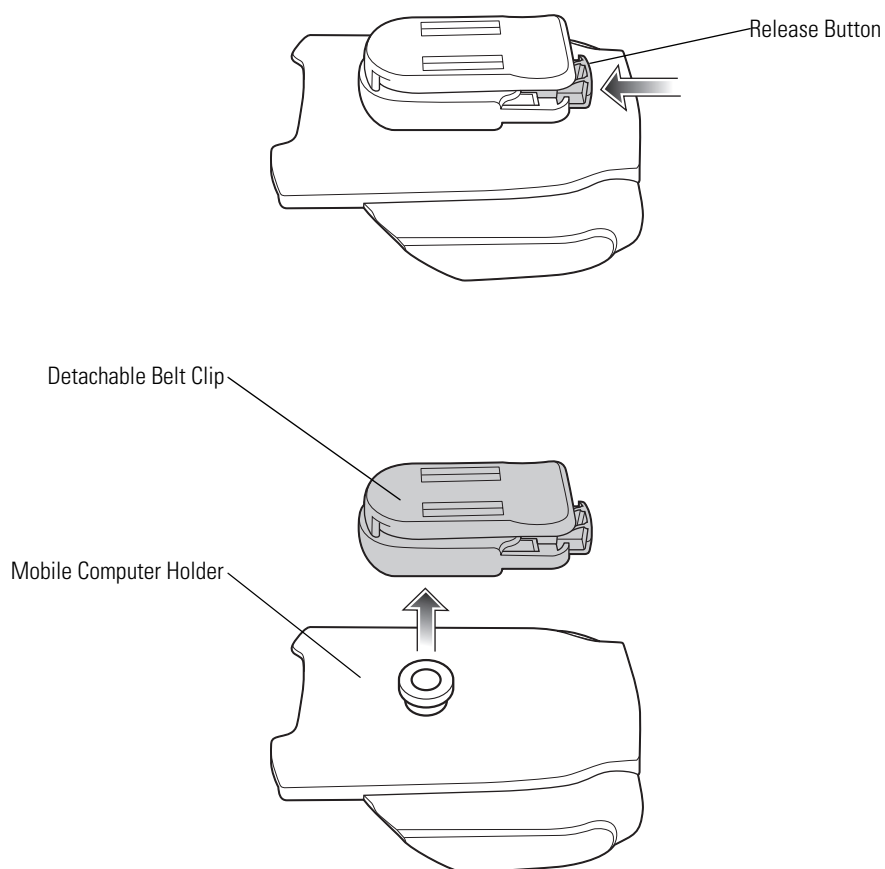


Figure 3-8. Plastic Holster

Using the Plastic Holster

Pinch the clip release and attach the Plastic Holster to a belt or waist band.

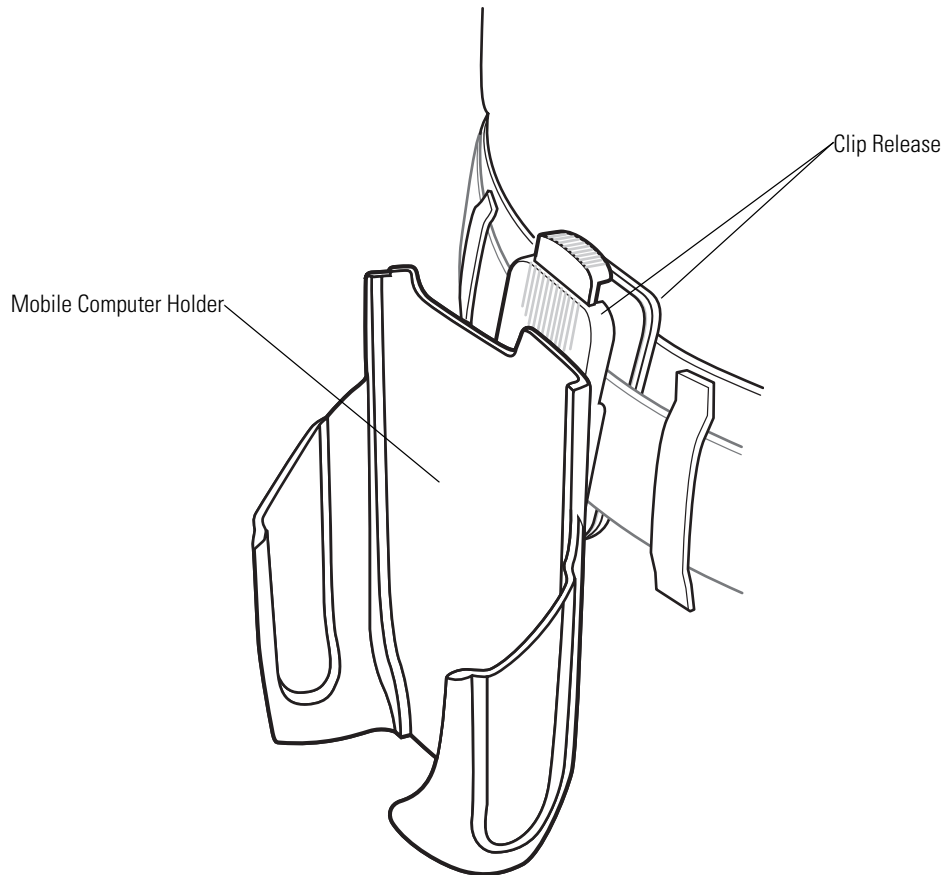


Figure 3-9. Attaching the Plastic Holster

Inserting and Removing the Mobile Computer

The Plastic Holster holds the mobile computer on a belt or waist band.

To insert the mobile computer, slide the mobile computer into the Plastic Holster with the screen facing the user.

To remove the mobile computer, press and lift to remove the mobile computer.

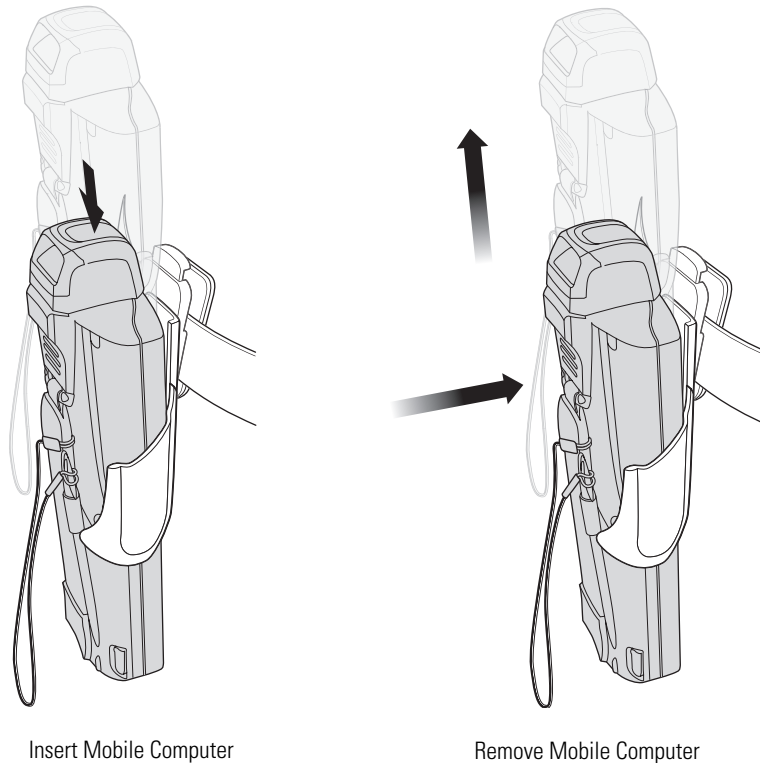


Figure 3-10. Insert and Remove the Mobile Computer

Fabric Holster

The Fabric Holster provides a soft holder for the mobile computer. It consists of a fabric mobile computer holder, a detachable shoulder strap and a detachable belt clip. The detachable belt clip works the same way as it works for the Plastic Holster. See [Figure 3-8 on page 3-13](#) to remove the detachable clip and see [Figure 3-9 on page 3-14](#) to attach the Fabric Holster to a belt. The detachable shoulder strap can also be used to attach the Fabric holster.

4

Maintenance & Troubleshooting

Introduction	4-3
Maintaining the Mobile Computer	4-3
Troubleshooting	4-4
Mobile Computer	4-4
Single Slot Serial/USB Cradle	4-6
Four Slot Charge Only Cradle	4-7
Four Slot Spare Battery Charger	4-7
UBC Adapter	4-8
Cables	4-8

Introduction

This chapter includes instructions on cleaning and storing the mobile computer, and provides troubleshooting solutions for potential problems during mobile computer operation.

Maintaining the Mobile Computer

For trouble-free service, observe the following tips when using the mobile computer:

- Do not scratch the screen of the mobile computer. When working with the mobile computer, use the supplied stylus or plastic-tipped pens intended for use with a touch-sensitive screen. Never use an actual pen or pencil or other sharp object on the surface of the mobile computer screen.
- Although the mobile computer is water and dust resistant, do not expose it to rain or moisture for an extended period of time. In general, treat the mobile computer as a pocket calculator or other small electronic instrument.
- The touch-sensitive screen of the mobile computer is glass. Do not drop the mobile computer or subject it to strong impact.
- Protect the mobile computer from temperature extremes. Do not leave it on the dashboard of a car on a hot day, and keep it away from heat sources.
- Do not store or use the mobile computer in any location that is extremely dusty, damp, or wet.
- Use a soft lens cloth to clean the mobile computer. If the surface of the mobile computer screen becomes soiled, clean it with a soft cloth moistened with a diluted window-cleaning solution.

Troubleshooting

Mobile Computer

Table 4-1. Troubleshooting the Mobile Computer

Problem	Cause	Solution
Mobile computer does not turn on.	Main battery not charged.	Charge or replace the main battery.
	Main battery not installed properly.	Ensure the battery is installed properly. See Install Main Battery on page 1-7 .
	System crash.	Perform a warm boot. If the mobile computer still does not turn on, perform a cold boot. For more information see, Resetting the Mobile Computer on page 2-27 .
Battery did not charge.	Battery failed.	Replace battery. If the mobile computer still does not operate, try a warm boot, then a cold boot. For more information see, Resetting the Mobile Computer on page 2-27 .
	Mobile computer removed from cradle while battery was charging.	Insert mobile computer in cradle and begin charging. The Standard Battery requires up to four hours to recharge fully and the Extended Life Battery requires up to six hours to recharge fully.
	Extreme battery temperature.	Battery does not charge if ambient temperature is below 32°F (0°C) or above 104°F (40°C).
Cannot see characters on screen.	Mobile computer not powered on.	Press the Power button.
During data communication, no data was transmitted, or transmitted data was incomplete.	Mobile computer removed from cradle or unplugged from host computer during communication.	Replace the mobile computer in the cradle, or reattach the cable and re-transmit.
	Incorrect cable configuration.	See the system administrator or refer to the <i>MC3000 Integrator Guide</i> .
	Communication software was incorrectly installed or configured.	See the system administrator or refer to the <i>MC3000 Integrator Guide</i> .
Mobile computer does not emit sound.	Volume setting is low or turned off.	Mobile computer may be a beeper only configuration or incorrect setting is programmed into device.
Mobile computer turns itself off.	Mobile computer is inactive.	The mobile computer turns off after a period of inactivity. This period can be set from one to five minutes, in one-minute intervals.
	Battery is depleted.	Recharge or replace the battery.
	Battery is not inserted properly.	Insert the battery properly. For more information see, Install Main Battery on page 1-7 .
Tapping the window buttons or icons does not activate the corresponding feature.	Touch screen not calibrated correctly.	Re-calibrate the screen. From the mobile computer, <i>Series 3000 Demo</i> window double-tap the <i>Ctl Panel</i> icon and double-tap on <i>Touch Calibrate</i> . Follow the screen prompts.
	The system crashed.	Warm boot the system. To perform a warm boot, see Resetting the Mobile Computer on page 2-27 .
A message appears stating that the mobile computer memory is full.	Too many files stored on the mobile computer.	Delete unused memos and records. If necessary, save these records on the host computer.
	Too many applications installed on the mobile computer.	Remove unused installed applications from the mobile computer to recover memory.

Table 4-1. Troubleshooting the Mobile Computer (Continued)

Problem	Cause	Solution
The mobile computer does not accept scan input.	Scanning application is not loaded.	Verify that the mobile computer is loaded with a scanning application. See the system administrator.
	Unreadable bar code.	Ensure the symbol is not defaced.
	Distance between scan window and bar code is incorrect.	Ensure the mobile computer is within proper scanning range.
	Mobile computer is not programmed for the bar code type.	Ensure the mobile computer is programmed to accept the type of bar code scanned.
	Mobile computer is not programmed to generate a beep.	If a beep on a good decode is expected and a beep is not heard, check that the application is set to generate a beep on good decode.
	Battery is low.	Check the battery level. When the battery is low, the mobile computer automatically goes into suspend mode.

Single Slot Serial/USB Cradle

Table 4-2. Troubleshooting the Single Slot Serial/USB Cradle

Symptom	Possible Cause	Solution
Amber Charge LED Indicator does not light when mobile computer is inserted.	Cradle is not receiving power.	Ensure the power cable is connected securely to both the cradle and to AC power.
	Mobile computer is not correctly seated.	Remove and re-insert the mobile computer into the cradle, ensuring it is correctly seated.
Spare Battery Charging LED does not light when spare battery is inserted.	Spare battery is not correctly seated.	Remove and re-insert the spare battery into the charging slot, ensuring it is correctly seated.
Mobile computer battery is not charging.	Mobile computer was removed from cradle or cradle was unplugged from AC power too soon.	Ensure cradle is receiving power. Ensure the mobile computer is seated correctly. If the mobile computer battery is fully depleted, it can take up to four hours to fully recharge a Standard Battery and it can take up to six hours to fully recharge an Extended Life Battery.
	Battery is faulty.	Verify that other batteries charge properly. If so, replace the faulty battery.
	The mobile computer is not fully seated in the cradle.	Remove and re-insert the mobile computer into the cradle, ensuring it is correctly seated.
Spare battery is not charging.	Battery not fully seated in charging slot.	Remove and re-insert the spare battery into the cradle, ensuring it is correctly seated.
	Battery inserted incorrectly.	Ensure the contacts are facing down and toward the back of the cradle.
	Battery is faulty.	Verify that other batteries charge properly. If so, replace the faulty battery.
During data communication, no data was transmitted, or transmitted data was incomplete.	Mobile computer removed from cradle during communication.	Replace mobile computer in cradle and retransmit.
	Incorrect cable configuration.	See the system administrator or refer to the <i>MC3000 Integrator Guide</i> .
	Communication software is not installed or configured properly.	See the system administrator or refer to the <i>MC3000 Integrator Guide</i> .

Four Slot Charge Only Cradle

Table 4-3. Troubleshooting the Four Slot Charge Only Cradle

Problem	Cause	Solution
Mobile computer amber Charge LED Indicator does not light when mobile computer inserted.	Cradle is not receiving power.	Ensure the power cable is connected securely to both the cradle and to AC power.
	Mobile computer is not correctly seated.	Remove and re-insert the mobile computer into the cradle, ensuring it is correctly seated.
Mobile computer battery is not charging.	Mobile computer was removed from cradle or cradle was unplugged from AC power too soon.	Ensure cradle is receiving power. Ensure the mobile computer is seated correctly. If the mobile computer battery is fully depleted, it can take up to four hours to fully recharge a Standard Battery and it can take up to six hours to fully recharge an Extended Life Battery.
	Battery is faulty.	Verify that other batteries charge properly. If so, replace the faulty battery.
	The mobile computer is not fully seated in the cradle.	Remove and re-insert the mobile computer into the cradle, ensuring it is correctly seated.

Four Slot Spare Battery Charger

Table 4-4. Troubleshooting the Four Slot Spare Battery Charger

Symptom	Possible Cause	Solution
Spare Battery Charging LED does not light when spare battery is inserted.	Spare battery is not correctly seated.	Remove and re-insert the spare battery into the charging slot, ensuring it is correctly seated.
Spare battery is not charging.	Charger is not receiving power.	Ensure the power cable is connected securely to both the charger and to AC power.
	Spare battery is not correctly seated.	Remove and re-insert the battery into the charger, ensuring it is correctly seated.
	Spare battery was removed from charger or charger was unplugged from AC power too soon.	Ensure charger is receiving power. Ensure the spare battery is seated correctly. If a battery is fully depleted, it can take up to four hours to fully recharge a Standard Battery and it can take up to six hours to fully recharge an Extended Life Battery.
	Spare battery is faulty.	Verify that other batteries charge properly. If so, replace the faulty battery.

UBC Adapter

Table 4-5. Troubleshooting the UBC Adapter

Symptom	Possible Cause	Solution
Battery Charging LED does not light when spare battery is inserted.	Spare battery is not correctly seated.	Remove and re-insert the spare battery into the charging slot, ensuring it is correctly seated.
Battery not charging.	Charger is not receiving power.	Ensure the power cable is connected securely to both the charger and to AC power.
	Spare battery is not correctly seated.	Remove and re-insert the spare battery into the charger, ensuring it is correctly seated.
	Spare battery was removed from charger or charger was unplugged from AC power too soon.	Ensure charger is receiving power. Ensure the spare battery is seated correctly. If a battery is fully depleted, it can take up to four hours to fully recharge a Standard Battery and it can take up to six hours to fully recharge an Extended Life Battery.
	Spare battery is faulty.	Verify that other batteries charge properly. If so, replace the faulty battery.

Cables

Table 4-6. Troubleshooting the Cables

Symptom	Possible Cause	Solution
Mobile computer amber Charge LED Indicator does not light when mobile computer attached.	Cable is not receiving power.	Ensure the power cable is connected securely to both the cable and to AC power.
	Mobile computer is not seated correctly in the cable.	Remove and re-attach the mobile computer to the MC3000 connector, ensuring it is correctly seated.
Mobile computer battery is not charging.	Mobile computer was detached from cable or cable was unplugged from AC power too soon.	Ensure cable is receiving power. Ensure the mobile computer is seated correctly. If the mobile computer battery is fully depleted, it can take up to four hours to fully recharge a Standard Battery and it can take up to six hours to fully recharge an Extended Life Battery.
	Battery is faulty.	Verify that other batteries charge properly. If so, replace the faulty battery.
	The mobile computer is not fully seated in the cable.	Remove and re-attach the mobile computer to the cable, ensuring it is correctly seated.
During data communication, no data was transmitted, or transmitted data was incomplete.	Cable removed from mobile computer during communication.	Reattach cable to mobile computer and retransmit.
	Incorrect cable configuration.	See the system administrator or refer to the <i>MC3000 Integrator Guide</i> .
	Communication software is not installed or configured properly.	See the system administrator or refer to the <i>MC3000 Integrator Guide</i> .



Technical Specifications

Appendix Contents

Mobile Computer Technical Specifications	A-3
--	-----

Mobile Computer Technical Specifications

The following table summarizes the mobile computer technical specifications and intended operating environment.

Table A-1. Mobile Computer Technical Specifications

Operating Temperature	Color 14° to 122°F (-10° to +50°C) Monochrome -4° to 122°F (-20° to +50°C)
Storage Temperature	-22° to 160°F (-30° to 70°C)
Battery Charging Temperature	32° to 104° F (0° to +40° C) ambient temperature
Humidity	5% to 95% non-condensing
Electrostatic Discharge (ESD)	+/-15 kV air discharge +/- 8 kV direct discharge +/- 8 kV indirect discharge
Drop to Concrete	4 feet (1.2 meters)
Sealing	IP54 category 2
Drop	Multiple 4-foot (1.2 m) drops to concrete across operating temperature
Tumble	500 one -half meter tumbles at room temperature (1000 drops)
Dimensions	MC3000-K: 7.43 in L x 3.18 in W x 1.76 in D (188.7 mm L x 80.8 mm W x 44.6 mm D) MC3000-R: 8.33 in L x 3.18 in W x 1.57 in D (211.6 mm L x 80.8 mm W x 39.9 mm D)
Weights	MC3000-R (with standard battery)* - 12.9 oz (366 g) MC3000-K (with extended battery)* - 14.6 oz (414 g) *For WLAN mobile computers add approximately 0.5 oz (14 g).
Display	Transflective color TFT-LCD, 65K colors, 324 x 324 Monochrome FSTN, 16 shades, 320 x 320
Touch Panel	Glass, analog resistive touch
Main Battery	Standard: Rechargeable Lithium-Polymer 2600 mAh minimum (3.7V) Extended Life: Rechargeable Lithium-Ion 4400 mAh minimum (3.7V)
Backup Battery	Ni-MH battery (rechargeable), 20mAh (3.6V) 3 cells
Operating Platform	Microsoft® Windows CE .NET 4.2 Professional Microsoft® Windows CE .NET 4.2 Core
Processor/Memory	Intel® XScale™ PXA 312MHz with 32MB RAM/64MB Flash or Intel® XScale™ PXA 520MHz with 64MB RAM/64MB Flash
Interface	RS232, 115.2 kbps max, and USB
WLAN	Symbol Spectrum 24, 802.11b, 802.11g
Keypad Options	28-Key, 38-Key and 48-Key

Table A-1. Mobile Computer Technical Specifications (Continued)

<p>Data Capture:</p> <p>1-D Decode Capability*</p> <p>Imaging Decode Capability*</p>	<p>Code 39, code 128, code 93, codabar, code 11, discrete 2 of 5, EAN-3, EAN-13, EAN-128, interleaved 2 of 5, UPCA, UPCE and UPC/EAN supplements.</p> <p>Code 39, code 128, code 93, codabar, code 11, discrete 2 of 5, EAN-3, EAN-13, EAN-128, interleaved 2 of 5, TLC39 (telecommunications), UPCA, UPCE, UPC/EAN supplements composite code (retail), coupon code (retail), macro PDF-417, (macro) micro PDF-417 (T&L), micro PDF-417 (telecommunications), MSI Plessey, PDF-417 (automotive), RSS expanded, RSS limited and RSS-14Maxi Code (UPS), Data matrix (electronics industry, US Planet (USPS), UK 4-state, Australian 4-state, Canadian 4-state, Japanese 4-state, Dutch Kix</p> <p>*Go to http://software.symbol.com/ for a list of the latest supported symbologies.</p>
SD cards	<p>The following Sandisk SD cards have been tested and qualified:</p> <p>SDSDB-64-201-80 (64 meg)</p> <p>SDSDB-128-201-80 (128 meg)</p> <p>SDSDB-512-201-80 (512 meg)</p>

Keypad Functions/Special Characters

Appendix Contents

Introduction	B-3
Keypads	B-3

Introduction


This appendix contains the keypad functions/special characters for the 38-Key keypad. Each function/special character is included in the table along with how the function/special character is generated.

Keypads


The mobile computer is available with one of three keypads:

- 28-key keypad
- 38-key keypad
- 48-key keypad.


The keypads can be selected as necessary to support specialized applications. The keypads contain a **Power** button, application keys, scroll keys and function keys. The keypad is color-coded to indicate the alternate function key (blue) values and the alternate ALPHA key (orange) values. See [Table B-1](#) for the special character generation. Characters can also be generated using the keyboard input panel. For more information see, [Entering Information Using the Keyboard Input Panel](#) on page 2-19.

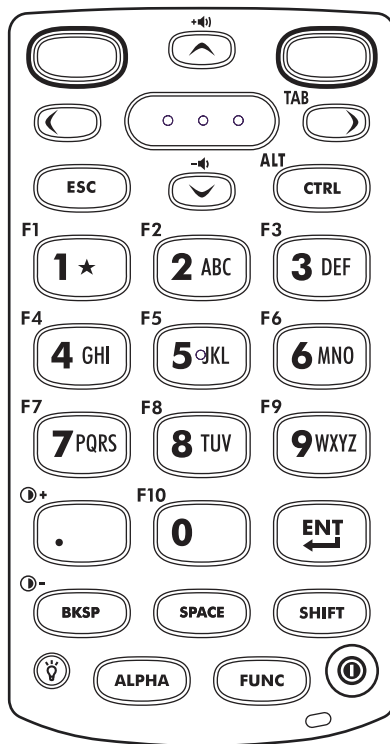

28-Key Keypad

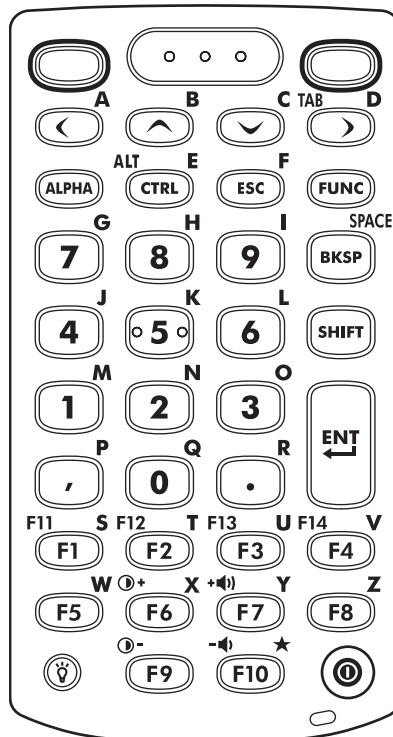

38-Key Keypad

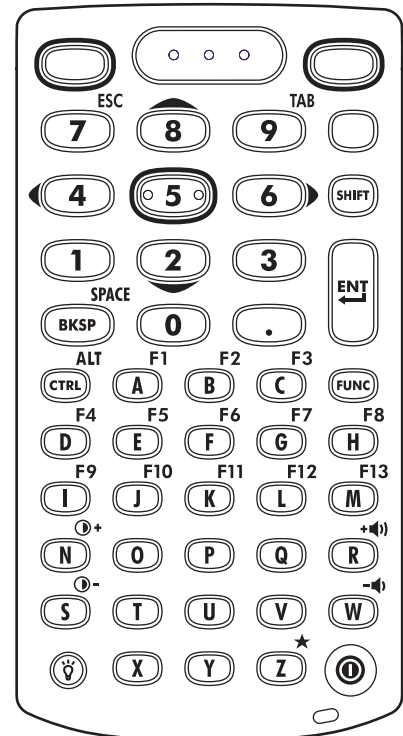

48-Key Keypad

Figure 2-1. Keypads

Table B-1. Special Character Generation Map

Special Character	28-Key Keypad Key Sequence, Special Character Generation	38-Key Keypad Key Sequence, Special Character Generation	48-Key Keypad Key Sequence, Special Character Generation
[Use the Keyboard Input Panel*	FUNC + 4	Use the Keyboard Input Panel*
]	Use the Keyboard Input Panel*	FUNC + 5	Use the Keyboard Input Panel*
/	Use the Keyboard Input Panel*	FUNC + 9	Use the Keyboard Input Panel*
\	Use the Keyboard Input Panel*	FUNC + 3	Use the Keyboard Input Panel*
=	Use the Keyboard Input Panel*	FUNC + 8	Use the Keyboard Input Panel*
;	Use the Keyboard Input Panel*	FUNC + 6	Use the Keyboard Input Panel*
-	Use the Keyboard Input Panel*	FUNC + 7	Use the Keyboard Input Panel*
`	Use the Keyboard Input Panel*	FUNC + 1	Use the Keyboard Input Panel*
"	Use the Keyboard Input Panel*	SHIFT + FUNC + 1	Use the Keyboard Input Panel*
!	SHIFT + 1	SHIFT + 1	SHIFT + 1
@	SHIFT + 2	SHIFT + 2	SHIFT + 2
#	SHIFT + 3	SHIFT + 3	SHIFT + 3
\$	SHIFT + 4	SHIFT + 4	SHIFT + 4
%	SHIFT + 5	SHIFT + 5	SHIFT + 5
^	SHIFT + 6	SHIFT + 6	SHIFT + 6
&	SHIFT + 7	SHIFT + 7	SHIFT + 7
*	SHIFT + 8	SHIFT + 8	SHIFT + 8
(SHIFT + 9	SHIFT + 9 or FUNC + SHIFT + 9	SHIFT + 9
)	SHIFT + 0	SHIFT + 0 or FUNC + SHIFT + 0	SHIFT + 0
"	Use the Keyboard Input Panel*	FUNC + 2	Use the Keyboard Input Panel*
+	Use the Keyboard Input Panel*	SHIFT + FUNC + 8	Use the Keyboard Input Panel*
:	Use the Keyboard Input Panel*	SHIFT + FUNC + 6	Use the Keyboard Input Panel*
<	Use the Keyboard Input Panel*	FUNC + SHIFT + ,	Use the Keyboard Input Panel*
>	Use the Keyboard Input Panel*	FUNC + SHIFT + .	Use the Keyboard Input Panel*
?	Use the Keyboard Input Panel*	SHIFT + FUNC + 9	Use the Keyboard Input Panel*
_	Use the Keyboard Input Panel*	SHIFT + FUNC + 7	Use the Keyboard Input Panel*
{	Use the Keyboard Input Panel*	SHIFT + FUNC + 4	Use the Keyboard Input Panel*
}	Use the Keyboard Input Panel*	SHIFT + FUNC + 5	Use the Keyboard Input Panel*
~	Use the Keyboard Input Panel*	SHIFT + FUNC + 2	Use the Keyboard Input Panel*
	N/A	SHIFT + FUNC + 3	N/A
* See <i>Entering Information Using the Keyboard Input Panel</i> on page 2-19.			

Glossary

802.11/802.11abg

Access Point

A radio protocol that may be used by the Symbol radio card.

Access Point (AP) refers to Symbol's Ethernet Access Point. It is a piece of communications equipment that manages communications between the host computer system and one or more wireless terminals. An AP connects to a wired Ethernet LAN and acts as a bridge between the Ethernet wired network and IEEE 802.11 interoperable radio-equipped mobile units, such as a mobile computer. The AP allows a mobile user to roam freely through a facility while maintaining a seamless connection to the wired network.

AirBEAM® Manager

AirBEAM® Manager is a comprehensive wireless network management system that provides essential functions that are required to configure, monitor, upgrade and troubleshoot the wireless network and its components (including networked mobile computers). Some features include event notification, access point configuration, diagnostics, statistical reports, auto-discovery, wireless proxy agents and monitoring of access points and mobile units.

AirBEAM® Smart Client

AirBEAM® Smart Client is part of Symbol's AirBEAM® suite, which also includes AirBEAM® Safe and AirBEAM® Manager. The AirBEAM® Smart Client system uses the network accessible host server to store software files that are to be downloaded to the mobile computers. The AirBEAM® Smart Client provides the mobile computers with the "smarts" to request software from the host. It allows them to request, download and install software, as well as to upload files and status data. The AirBEAM® Smart Client uses the industry standard FTP or TFTP file transfer protocols to check the host system for updates, and if necessary, to transfer updated software. Most often, AirBEAM® Smart Client is used with wireless networks, but any TCP/IP connection can be used. For more information, refer to the AirBEAM® Smart Windows® CE Client Product Reference Guide (p/n 72-63060-xx).

AP

See **Access Point**.

Aperture

The opening in an optical system defined by a lens or baffle that establishes the field of view.

ASCII

American Standard Code for Information Interchange. A 7 bit-plus-parity code representing 128 letters, numerals, punctuation marks and control characters. It is a standard data transmission code in the U.S.

Autodiscrimination

The ability of an interface controller to determine the code type of a scanned bar code. After this determination is made, the information content is decoded.

Bar

The dark element in a printed bar code symbol.

Bar Code

A pattern of variable-width bars and spaces which represents numeric or alphanumeric data in machine-readable form. The general format of a bar code symbol consists of a leading margin, start character, data or message character, check character (if any), stop character, and trailing margin. Within this framework, each recognizable symbology uses its own unique format. See **Symbology**.

Bar Code Density

The number of characters represented per unit of measurement (e.g., characters per inch).

Bar Height

The dimension of a bar measured perpendicular to the bar width.

Bar Width

Thickness of a bar measured from the edge closest to the symbol start character to the trailing edge of the same bar.

Bit

Binary digit. One bit is the basic unit of binary information. Generally, eight consecutive bits compose one byte of data. The pattern of 0 and 1 values within the byte determines its meaning.

Bits per Second (bps)

Bits transmitted or received.

Bit

Binary digit. One bit is the basic unit of binary information. Generally, eight consecutive bits compose one byte of data. The pattern of 0 and 1 values within the byte determines its meaning.

bps

See **Bits Per Second**.

Byte	On an addressable boundary, eight adjacent binary digits (0 and 1) combined in a pattern to represent a specific character or numeric value. Bits are numbered from the right, 0 through 7, with bit 0 the low-order bit. One byte in memory is used to store one ASCII character.
boot or boot-up	The process a computer goes through when it starts. During boot-up, the computer can run self-diagnostic tests and configure hardware and software.
CDRH	Center for Devices and Radiological Health. A federal agency responsible for regulating laser product safety. This agency specifies various laser operation classes based on power output during operation.
CDRH Class 1	This is the lowest power CDRH laser classification. This class is considered intrinsically safe, even if all laser output were directed into the eye's pupil. There are no special operating procedures for this class.
CDRH Class 2	No additional software mechanisms are needed to conform to this limit. Laser operation in this class poses no danger for unintentional direct human exposure.
Character	A pattern of bars and spaces which either directly represents data or indicates a control function, such as a number, letter, punctuation mark, or communications control contained in a message.
Character Set	Those characters available for encoding in a particular bar code symbology.
Check Digit	A digit used to verify a correct symbol decode. The scanner inserts the decoded data into an arithmetic formula and checks that the resulting number matches the encoded check digit. Check digits are required for UPC but are optional for other symbologies. Using check digits decreases the chance of substitution errors when a symbol is decoded.
Codabar	A discrete self-checking code with a character set consisting of digits 0 to 9 and six additional characters: (- \$: / , +).
Code 128	A high density symbology which allows the controller to encode all 128 ASCII characters without adding extra symbol elements.
Code 3 of 9 (Code 39)	A versatile and widely used alphanumeric bar code symbology with a set of 43 character types, including all uppercase letters, numerals from 0 to 9 and 7 special characters (- . / + % \$ and space). The code name is derived from the fact that 3 of 9 elements representing a character are wide, while the remaining 6 are narrow.
Code 93	An industrial symbology compatible with Code 39 but offering a full character ASCII set and a higher coding density than Code 39.
Code Length	Number of data characters in a bar code between the start and stop characters, not including those characters.
Cold Boot	A cold boot restarts the mobile computer and erases all user stored records and entries.

COM port	Communication port; ports are identified by number, e.g., COM1, COM2.
Continuous Code	A bar code or symbol in which all spaces within the symbol are parts of characters. There are no intercharacter gaps in a continuous code. The absence of gaps allows for greater information density.
Cradle	A cradle is used for charging the terminal battery and for communicating with a host computer, and provides a storage place for the terminal when not in use.
Dead Zone	An area within a scanner's field of view, in which specular reflection may prevent a successful decode.
Decode	To recognize a bar code symbology (e.g., UPC/EAN) and then analyze the content of the specific bar code scanned.
Decode Algorithm	A decoding scheme that converts pulse widths into data representation of the letters or numbers encoded within a bar code symbol.
Decryption	Decryption is the decoding and unscrambling of received encrypted data. Also see, Encryption and Key .
Depth of Field	The range between minimum and maximum distances at which a scanner can read a symbol with a certain minimum element width.
Discrete Code	A bar code or symbol in which the spaces between characters (intercharacter gaps) are not part of the code.
Discrete 2 of 5	A binary bar code symbology representing each character by a group of five bars, two of which are wide. The location of wide bars in the group determines which character is encoded; spaces are insignificant. Only numeric characters (0 to 9) and START/STOP characters may be encoded.
EAN	European Article Number. This European/International version of the UPC provides its own coding format and symbology standards. Element dimensions are specified metrically. EAN is used primarily in retail.
Element	Generic term for a bar or space.
Encoded Area	Total linear dimension occupied by all characters of a code pattern, including start/stop characters and data.
ESD	Electro-Static Discharge
ESN	Electronic Serial Number. The unique hardware number associated with a cellular device, which is transmitted to the system when the device communicates with the cellular system.
Ethernet	Ethernet communication port. Allows a wired interface to a radio network.
Flash Memory	Flash memory is nonvolatile, semi-permanent storage that can be electronically erased in the circuit and reprogrammed. Series 9000 mobile computers use Flash memory to store the operating system (ROM-DOS), the terminal emulators, and the Citrix ICA Client for DOS.
FTP	See File Transfer Protocol .

Flash Memory

Flash memory is responsible for storing the system firmware and is non-volatile. If the system power is interrupted the data is not be lost.

Gateway Address

An IP address for a network gateway or router. A mobile computer may be part of a subnet as specified by its IP address and Netmask. It can send packets directly to any node on the same subnet. If the destination node is on a different subnet, then the terminal sends the packet to the gateway first. The gateway determines how to route the packet to the destination subnet. This field is an option used by networks that require gateways.

Hard Reset

See **Cold Boot**.

Hz

Hertz; A unit of frequency equal to one cycle per second.

Host Computer

A computer that serves other terminals in a network, providing such services as computation, database access, supervisory programs and network control.

IDE

Intelligent drive electronics. Refers to the solid-state hard drive type.

IEC

International Electrotechnical Commission. This international agency regulates laser safety by specifying various laser operation classes based on power output during operation.

IEC (825) Class 1

This is the lowest power IEC laser classification. Conformity is ensured through a software restriction of 120 seconds of laser operation within any 1000 second window and an automatic laser shutdown if the scanner's oscillating mirror fails.

Interleaved 2 of 5

A binary bar code symbology representing character pairs in groups of five bars and five interleaved spaces. Interleaving provides for greater information density. The location of wide elements (bar/spaces) within each group determines which characters are encoded. This continuous code type uses no intercharacter spaces. Only numeric (0 to 9) and START/STOP characters may be encoded.

imaging scanning

Mobile computers with an integrated imager use digital camera technology to take a digital picture of a bar code, store the resulting image in memory and execute state-of-the-art software decoding algorithms to extract the data from the image.

Intercharacter Gap

The space between two adjacent bar code characters in a discrete code.

Interleaved Bar Code

A bar code in which characters are paired together, using bars to represent the first character and the intervening spaces to represent the second.

Interleaved 2 of 5

A binary bar code symbology representing character pairs in groups of five bars and five interleaved spaces. Interleaving provides for greater information density. The location of wide elements (bar/spaces) within each group determines which characters are encoded. This continuous code type uses no intercharacter spaces. Only numeric (0 to 9) and START/STOP characters may be encoded.

Internet Protocol Address**IP**

See **IP**.

Internet Protocol. The IP part of the TCP/IP communications protocol. IP implements the network layer (layer 3) of the protocol, which contains a network address and is used to route a message to a different network or subnetwork. IP accepts "packets" from the layer 4 transport protocol (TCP or UDP), adds its own header to it and delivers a "datagram" to the layer 2 data link protocol. It may also break the packet into fragments to support the maximum transmission unit (MTU) of the network.

IP Address

(Internet Protocol address) The address of a computer attached to an IP network. Every client and server station must have a unique IP address. A 32-bit address used by a computer on a IP network. Client workstations have either a permanent address or one that is dynamically assigned to them each session. IP addresses are written as four sets of numbers separated by periods; for example, 204.171.64.2.

LAN

Local area network. A radio network that supports data communication within a local area, such as within a warehouse or building.

laser scanner

A type of bar code reader that uses a beam of laser light.

LASER

Light Amplification by Stimulated Emission of Radiation. The laser is an intense light source. Light from a laser is all the same frequency, unlike the output of an incandescent bulb. Laser light is typically coherent and has a high energy density.

Laser Diode

A gallium-arsenide semiconductor type of laser connected to a power source to generate a laser beam. This laser type is a compact source of coherent light.

LED Indicator

A semiconductor diode (LED - Light Emitting Diode) used as an indicator, often in digital displays. The semiconductor uses applied voltage to produce light of a certain frequency determined by the semiconductor's particular chemical composition.

Light Emitting Diode

See **LED**.

MC

Mobile Computer.

MIL

1 mil = 1 thousandth of an inch.

MIN

Mobile Identification Number. The unique account number associated with a cellular device. It is broadcast by the cellular device when accessing the cellular system.

Misread (Misdecode)

A condition which occurs when the data output of a reader or interface controller does not agree with the data encoded within a bar code symbol.

Mobile Computer	In this text, <i>mobile computer</i> refers to the Symbol Series 9000 wireless portable computer . It can be set up to run as a stand-alone device, or it can be set up to communicate with a network, using wireless radio technology.
Nominal	The exact (or ideal) intended value for a specified parameter. Tolerances are specified as positive and negative deviations from this value.
Nominal Size	Standard size for a bar code symbol. Most UPC/EAN codes are used over a range of magnifications (e.g., from 0.80 to 2.00 of nominal).
NVM	Non-Volatile Memory.
Parameter	A variable that can have different values assigned to it.
PDT	Portable Data Terminal.
Percent Decode	The average probability that a single scan of a bar code would result in a successful decode. In a well-designed bar code scanning system, that probability should approach near 100%.
Quiet Zone	A clear space, containing no dark marks, which precedes the start character of a bar code symbol and follows the stop character.
RAM	Random Access Memory. Data in RAM can be accessed in random order, and quickly written and read.
Reflectance	Amount of light returned from an illuminated surface.
Resolution	The narrowest element dimension which is distinguished by a particular reading device or printed with a particular device or method.
RF	Radio Frequency.
ROM	Read-Only Memory. Data stored in ROM cannot be changed or removed.
ROM-DOS	The name of the licensed Disk Operating System loaded into the terminal's flash file system.
Router	A device that connects networks and supports the required protocols for packet filtering. Routers are typically used to extend the range of cabling and to organize the topology of a network into subnets. See Subnet .
RS232	An Electronic Industries Association (EIA) standard that defines the connector, connector pins, and signals used to transfer data serially from one device to another.
Scan Area	Area intended to contain a symbol.
Scanner	An electronic device used to scan bar code symbols and produce a digitized pattern that corresponds to the bars and spaces of the symbol. Its three main components are: <ol style="list-style-type: none"> 1. Light source (laser or photoelectric cell) - illuminates a bar code. 2. Photodetector - registers the difference in reflected light (more light reflected from spaces). 3. Signal conditioning circuit - transforms optical detector output into a digitized bar pattern.

Scanning Mode	The scanner is energized, programmed and ready to read a bar code.
Scanning Sequence	A method of programming or configuring parameters for a bar code reading system by scanning bar code menus.
SDK	Software Development Kit
Self-Checking Code	A symbology that uses a checking algorithm to detect encoding errors within the characters of a bar code symbol.
Shared Key	Shared Key authentication is an algorithm where both the AP and the MU share an authentication key.
SID	System Identification code. An identifier issued by the FCC for each market. It is also broadcast by the cellular carriers to allow cellular devices to distinguish between the home and roaming service.
SMDK	Symbol Mobility Developer's Kit.
Soft Reset	See Warm Boot .
Space	The lighter element of a bar code formed by the background between bars.
Specular Reflection	The mirror-like direct reflection of light from a surface, which can cause difficulty decoding a bar code.
Spring Radio Protocol	A radio protocol that may be used by the Symbol radio card. Symbol Radio cards that use the Spring protocol also have a Net ID.
Start/Stop Character	A pattern of bars and spaces that provides the scanner with start and stop reading instructions and scanning direction. The start and stop characters are normally to the left and right margins of a horizontal code.
STEP	Symbol Terminal Enabler Program.
Subnet	A subset of nodes on a network that are serviced by the same router. See Router .
Subnet Mask	A 32-bit number used to separate the network and host sections of an IP address. A custom subnet mask subdivides an IP network into smaller subsections. The mask is a binary pattern that is matched up with the IP address to turn part of the host ID address field into a field for subnets. Default is often 255.255.255.0.
Substrate	A foundation material on which a substance or image is placed.
SVTP	Symbol Virtual Terminal Program.
Symbol	A scannable unit that encodes data within the conventions of a certain symbology, usually including start/stop characters, quiet zones, data characters and check characters.
Symbol Aspect Ratio	The ratio of symbol height to symbol width.
Symbol Height	The distance between the outside edges of the quiet zones of the first row and the last row.

Symbol Length	Length of symbol measured from the beginning of the quiet zone (margin) adjacent to the start character to the end of the quiet zone (margin) adjacent to a stop character.
Symbology	The structural rules and conventions for representing data within a particular bar code type (e.g. UPC/EAN, Code 39, PDF417, etc.).
Tolerance	Allowable deviation from the nominal bar or space width.
UPC	Universal Product Code. A relatively complex numeric symbology. Each character consists of two bars and two spaces, each of which is any of four widths. The standard symbology for retail food packages in the United States.
Visible Laser Diode (VLD)	A solid state device which produces visible laser light.
WAN	Wide-Area Network. A radio network that supports data communication beyond a local area. That is, information can be sent across a city, state, or even nationwide.
Warm Boot	A warm boot restarts the mobile computer by closing all running programs. All data that is not saved to flash memory is lost.
Wireless Local Area Network (WLAN)	See LAN .
Wireless Wide Area Network (WWAN)	See WAN .
WNMP	(Wireless Network Management Protocol) This is Symbol's proprietary MAC layer protocol used for inter access point communication and other MAC layer communication.

Index

Numerics

28-key keypad	2-4
38-key keypad	2-7
48-key keypad	2-10

A

accessories	1-4
cables	3-8
four slot charge only cradle	3-3, 3-6
battery charging	3-6
LED indicators	3-6
four slot spare battery charger	3-3
battery charging	3-7
LED indicators	3-7
MC3000 communication/charge cables	
battery charging	3-9
LED indicators	3-9
plastic holster	3-13
SD card	3-12
single slot serial/USB cradle	3-3, 3-4
battery charging	3-4
LED indicators	3-5
stylus	1-4
UBC adapter	3-3
battery charging	3-10
LED indicators	3-11
active and indicate programs	2-13
active tasks	2-16

ActiveSync	xiii
aiming options	
aiming pattern	2-22
attaching strap/door assembly	1-13

B

backup battery specification	A-3
battery	
charging	1-8
temperature range	A-3
install	1-7
removal	1-12
specification	A-3
status	2-13
battery charge status	2-13
battery chargers	
four slot spare battery charger	
battery charging	3-7
LED indicators	3-7
MC3000 communication/charge cables	
battery charging	3-9
LED indicators	3-9
UBC adapter	
battery charging	3-10
LED indicators	3-11

battery charging	1-8
backup battery	1-8
four slot charge only cradle	3-6
four slot spare battery charger	3-7
main battery	1-8

MC3000 communication/charge cables	3-9
battery charging	3-9
temperature range	1-8
UBC adapter	3-10

battery status	2-13
beeper	1-5
beeper volume	2-3
bullets	xiii

C

cables	3-3, 3-8
calibration screen	1-10
characters, special	B-4
charge battery	1-8
charge LED indicator	1-5
charging	
spare batteries	1-9
temperature range	A-3
charging battery	1-8
charging, temperature range	1-8
cleaning	4-3
clock, display	2-17
communication status	2-13
contrast settings	2-3
conventions	
notational	xiii
cradles	
four slot charge only cradle	3-3, 3-6
battery charging	3-6
LED indicators	3-6
single slot serial/USB cradle	3-3
battery charging	3-4
LED indicators	3-5
troubleshooting	4-7

D

data backup	1-8
data capture specifications	A-4
DCP	xiii, 1-4
decode ranges	2-20, 2-24
demo window	1-11, 2-12
desktop window	2-12
device configuration package	1-4
Device Configuration Package, see DCP	
dimensions	A-3
directory structure	2-28
display clock	2-17
display contrast	2-3
display specification	A-3
documentation updates	xiii
documents	2-15

E

electro-static discharge	
end task	2-16
entering data with scanner	2-18
entering information	2-18
scanning	2-18
ESD	3-12, A-3

F

fabric holster	1-4, 3-15
favorites	2-15
file folders	2-28
file system directory structure	2-28
four slot charge only cradle	1-4, 3-3, 3-6
battery charging	3-6
LED indicators	3-6
four slot charge only cradles	1-8
four slot spare battery charger	1-4, 1-8, 1-9
battery charging	3-7
LED indicators	3-7
troubleshooting	4-7
function status	2-13

H

hard reset	2-26
headset jack	1-6
help	2-15
holster, plastic	1-4
humidity	A-3

I

Imager	
image capture	2-22
imager	2-22
aiming	2-22
decode mode	2-22
function	2-22
operational modes	2-22
imager decode ranges	2-25
imager scanning	2-22
indicator LED bar	1-5, 3-4, 3-6
information, service	xiv
internet	
wireless connection	2-29
internet connection	2-29

K

keypad	
28-key	2-3, 2-4, B-3
38-key	2-3, 2-7, B-3
48-key	2-3, 2-10, B-3
keypad configurations	2-3
keypad functions	B-3
keypad special functions	2-3

L

- laser decode ranges 2-21
- laser scanning 2-19

M

- main battery 1-8
 - charging 1-7
 - temperature range A-3
 - inserting 1-7
- main battery removal 1-12
- maintenance 4-3
- MC3000 communication/charge cables 3-8
 - battery charging 3-9
 - LED indicators 3-9
- MC3000-K parts xii, 1-5, 1-6
- MC3000-R parts xii, 1-5, 1-6
- microphone 1-5
- mobile computer
 - cold boot 2-26
 - hard reset 2-26
 - power on 2-3
 - reset 2-26
 - scanning 2-19
 - soft reset 2-26
 - warm boot 2-26
- Monarch printer cable 1-4, 3-8

N

- navigating software 2-3

O

- operating
 - environment A-3
 - platforms A-3
 - temperature A-3
- OS A-3
- O'Neil printer cable 1-4, 3-8

P

- parts 1-5, 1-6
- PDF417
 - slab raster option 2-22
 - smart raster 2-22
- plastic holster 1-4, 3-13
- power button 2-3
- power supply 1-4
- processor/memory specifications A-3
- program menu 2-15
- properties 2-16

R

- radio module specifications A-3
- receiver 1-5
- receiver volume 2-3
- remove battery 1-12
- remove the Strap/Door Assembly 1-13
- resetting 2-26
- rotating scan head 1-5
- rotating scan turret 1-6
- RS232 charge cable 1-4, 1-8, 3-8
- run 2-15

S

- scan 2-18
- scan buttons 1-5
- scan LED indicators 1-5, 2-19
- scan status 2-19
- scan window 1-6
- scanning 2-18, 2-19
 - adjusting the distance 2-19
 - angle 2-20
 - indicator 2-19
 - LED indicators 2-19
 - range 2-20
- scanning considerations 2-20
- screen
 - calibration 1-10
 - contrast 2-3
 - specifications A-3
- SD card 3-12
 - installation 3-12
 - specifications A-4
- sealing specification A-3
- secure device card 3-12
- serial charge cable 1-8, 3-8
- series 3000 demo window 1-11, 2-12
- service 4-3
- service information xiv
- settings 2-15
- show clock 2-17
- single slot cradle RS232 cable 1-4
- single slot cradle USB cable 1-4
- single slot serial/USB cradle 1-4, 1-8, 1-9, 3-3, 3-4
 - battery charging 3-4
 - LED indicators 3-5
- soft reset 2-26
- spare battery
 - charging 1-9
- special characters B-4
- special functions, keypad 2-3
- specifications A-1
- start menu 2-15
- starting the mobile computer 1-7, 1-10
- startup 1-7
- status icon 2-13
- storage temperature A-3
- storing 4-3

strap/door assembly	1-6
attaching	1-13
strap/door assembly removal	1-13
stylus	1-4, 1-6, 1-9
stylus holder	1-6
suspend	1-12, 1-13, 2-15
Symbol Mobility Developer Kit	1-4
Symbol Mobility Developer Kit for .NET, see SMDK	
Symbol support center	xiv

T

task manager	2-16
taskbar	2-13
technical specifications	A-3
temperature	
battery charging	A-3
operating	A-3
storage	A-3
troubleshooting	4-4
cables	4-8
four slot charge only cradle	4-7
four slot spare battery charger	4-7
mobile computer	4-4
single slot serial/USB cradle	4-6
UBC adapter	4-8

U

UBC	1-4
UBC adapter	1-8, 1-9, 3-3
battery charging	3-10
LED indicators	3-11
UBC adapter	
LED indicators	3-11
UBC adapter LED charge indications	3-11
universal battery charger adapter	1-4, 1-8
unpacking	1-3
updates, documentation	xiii
USB client charge cable	1-4, 1-8, 3-8
using stylus	1-9

V

volume	2-3
--------	-----

W

wakeup condition settings	1-11
wakeup conditions	2-27
warm boot	2-26
weight	A-3
Windows CE .NET 4.2 Core	2-12, 2-15
Windows CE .NET 4.2 Professional	2-12, 2-15
wireless	
internet	2-29
wireless zero configuration	2-29
WLAN	A-3
WZC	2-29

Z

Zebra printer cable	1-4, 3-8
---------------------	----------

Tell Us What You Think...

We'd like to know what you think about this Manual. Please take a moment to fill out this questionnaire and fax this form to: (631) 738-3318, or mail to:

Symbol Technologies, Inc.
One Symbol Plaza M/S B-4
Holtsville, NY 11742-1300
Attention: Technical Publications Manager

IMPORTANT: If you need product support, please call the appropriate customer support number provided. Unfortunately, we cannot provide customer support at the fax number above.

Manual Title: _____
(please include revision level)

How familiar were you with this product before using this manual?

☐ Very familiar ☐ Slightly familiar ☐ Not at all familiar

Did this manual meet your needs? If not, please explain.

What topics need to be added to the index, if applicable?

What topics do you feel need to be better discussed? Please be specific.

What can we do to further improve our manuals?

Symbol Technologies, Inc.
One Symbol Plaza
Holtsville, New York 11742-1300
<http://www.symbol.com>



72-68899-01
Revision A - December 2004