

OMNII™ PISTOL GRIP INSTALLATION & REMOVAL INSTRUCTIONS

1. Introduction

There are a number of pistol grips available depending on the type of back cover and scanner/imager installed in your hand-held. Refer to the table below for a list of pistol grip model numbers along with the types of back covers and scanners/imagers with which they are compatible.

ACCESSORY	MODEL NUMBER
Pistol Grip	ST6000 - Kit Pistol Grip Standard Pod ST6100 - Kit Pistol Grip Standard Back A ST6300 - Kit Pistol Grip Flush Mount ST6400 - Kit Pistol Grip Standard Back B
Pistol Grip Trigger Cover	ST6104

2. Removing the Trigger Cover




Warning: If you are removing an **existing** pistol grip, skip this step and follow the steps described under "Removing the Pistol Grip" on page 2.

Before installing the pistol grip, you need to remove the trigger cover.

- Using a flathead screwdriver, carefully pry the trigger cover off the hand-held.

Figure 1 Removing the Trigger Cover

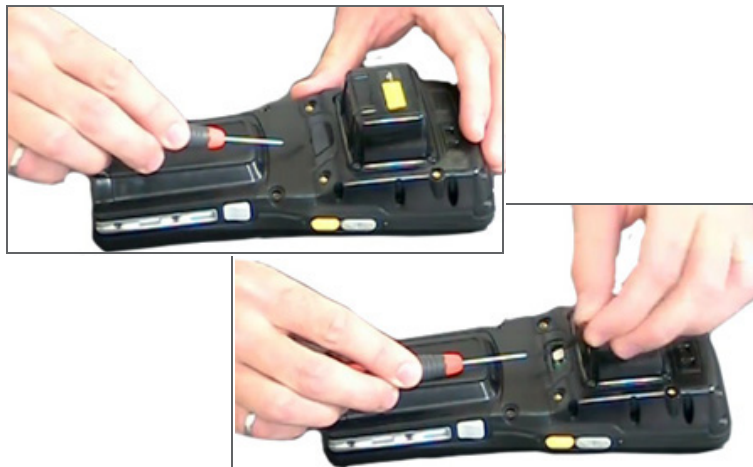

3. Attaching the Pistol Grip



Important: If you are replacing an existing pistol grip, you'll need to follow the steps described under "Removing the Pistol Grip" on page 2 **before** following the steps in this section.

Prior to installation, make sure the trigger mechanism is securely snapped into the pistol grip body and that the trigger operates properly.

The pistol grip is attached to the back cover of your Omnii using the four threaded inserts in the upper part of the Omnii casing. Four M3x6 Phillips head screws are provided with this accessory.

- Position the pistol grip so that it fits snugly over the back of the unit and the holes in the pistol grip are aligned with the threaded inserts on the back of the hand-held. Figure 2, Attaching the Pistol Grip, provides a visual illustration.
- Using a Phillips screwdriver, tighten the screws to a torque of 3 in-lb (3.5 Kgf-cm) to secure the pistol grip in place.

Figure 2 Attaching the Pistol Grip




4. Removing the Pistol Grip

- Remove the 4 screws holding the pistol grip in place.
- Clean the perimeter of the trigger cover area with isopropyl alcohol.



Important: If you are replacing an existing pistol grip with a **new** pistol grip, remove the screws and clean the perimeter of the trigger cover as described above, and then skip the last step in this section. Follow the steps under "Attaching the Pistol Grip" on page 1 for details about installing a new pistol grip.

- Fit the trigger cover over the opening, and press it firmly into place.

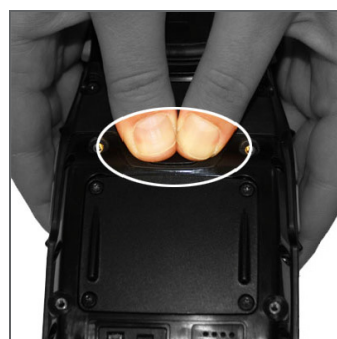

COMPANY HEADQUARTERS

Psion Inc.
 2100 Meadowvale Boulevard, Mississauga
 Ontario, Canada L5N 7J9
 Tel: +1 905 813 9900
 Fax: +1 905 812 6300

SUPPORT SERVICES

For local support services, go to:
<http://www.pSION.com/service-and-support.htm>