

GO

撕下并扔掉外包装

打开介质卷并将其安放到介质卷支架上


确保介质卷支架旋转自如

将纸从打印机前端位置拉出

将纸压到介质导轨下

将传感器对齐至中心（默认）位置附近，
或对齐至黑色标记的中间位置

使用清洁笔清洁打印头
从打印头中间向外侧擦拭

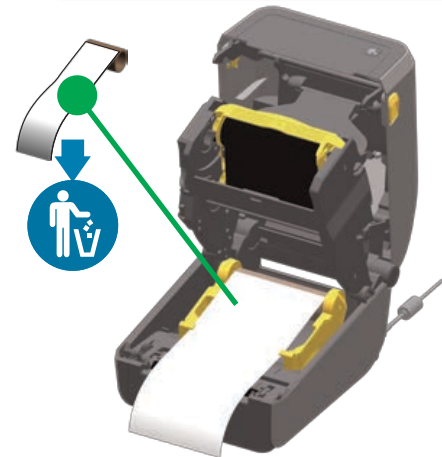


打开打印机
扔掉空介质卷




介质用尽
“状态”+“介质”指示灯呈红色




按住“进纸”+“取消”按钮，保持 2 秒钟
打印配置报告

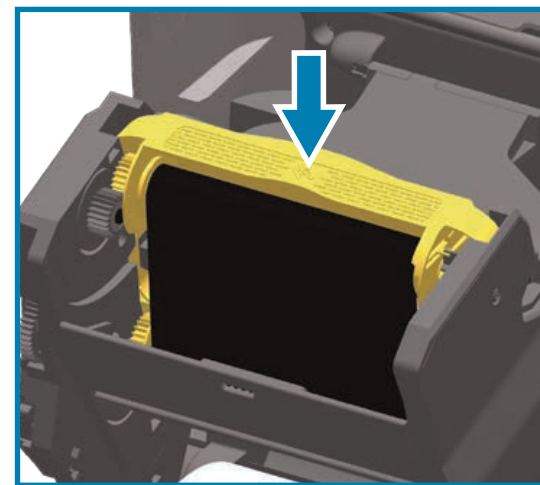


用力按压以安装到位

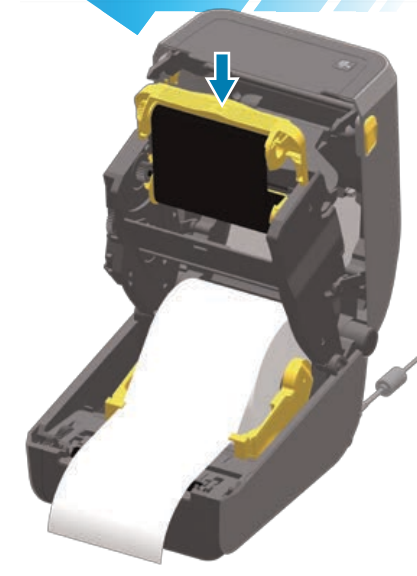

将色带夹插入插槽中

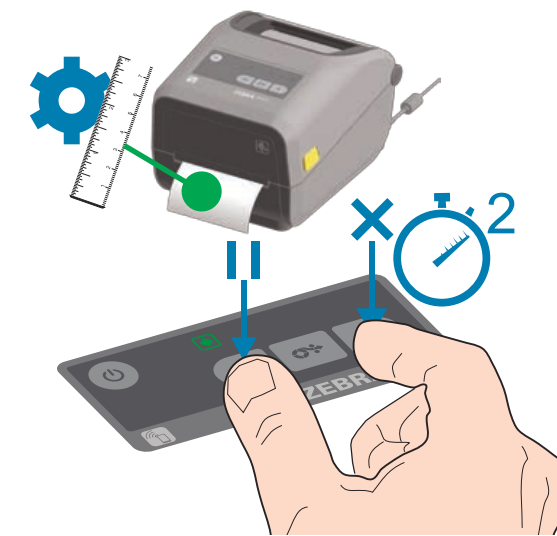

按住“暂停”+“取消”按钮，保持 2 秒钟
执行智能校准

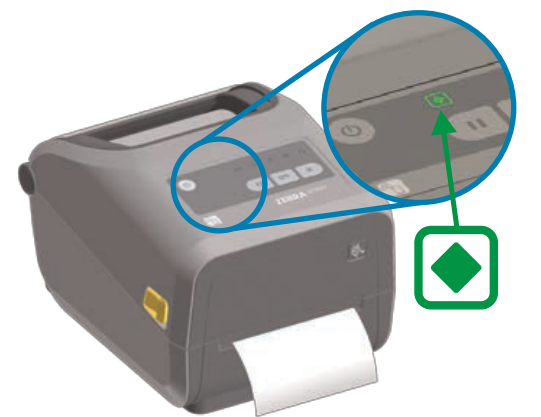

绿色状态指示灯亮起 — 打印机准备就绪

指标
STATUS PAUSE DATA SUPPLIES NETWORK

					准备就绪
					已暂停
					打印机盖打开
					介质用尽
					网络错误
					色带不足
					色带用尽
					通信错误



暂停



进纸



取消



— <http://www.zebra.com/contact>



— <https://km.zebra.com>



— <https://www.zebra.com/supplies>



配置报告




智能校准



www.zebra.com/zd420c-info



合上打印机盖

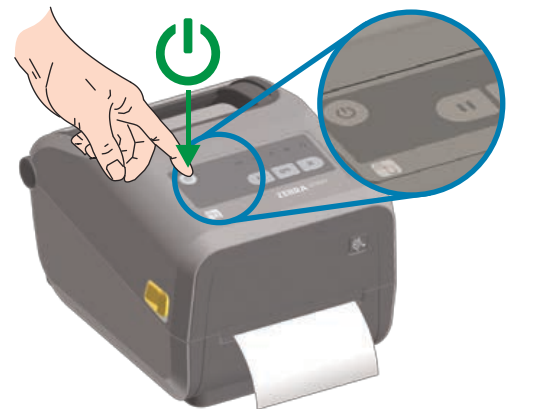

按下电源键，等待指示灯循环亮起



<http://www.zebra.com/supplies>



3

<http://www.zebra.com/zd420c-info>



2



<http://www.zebra.com/setup>



1



ZD420

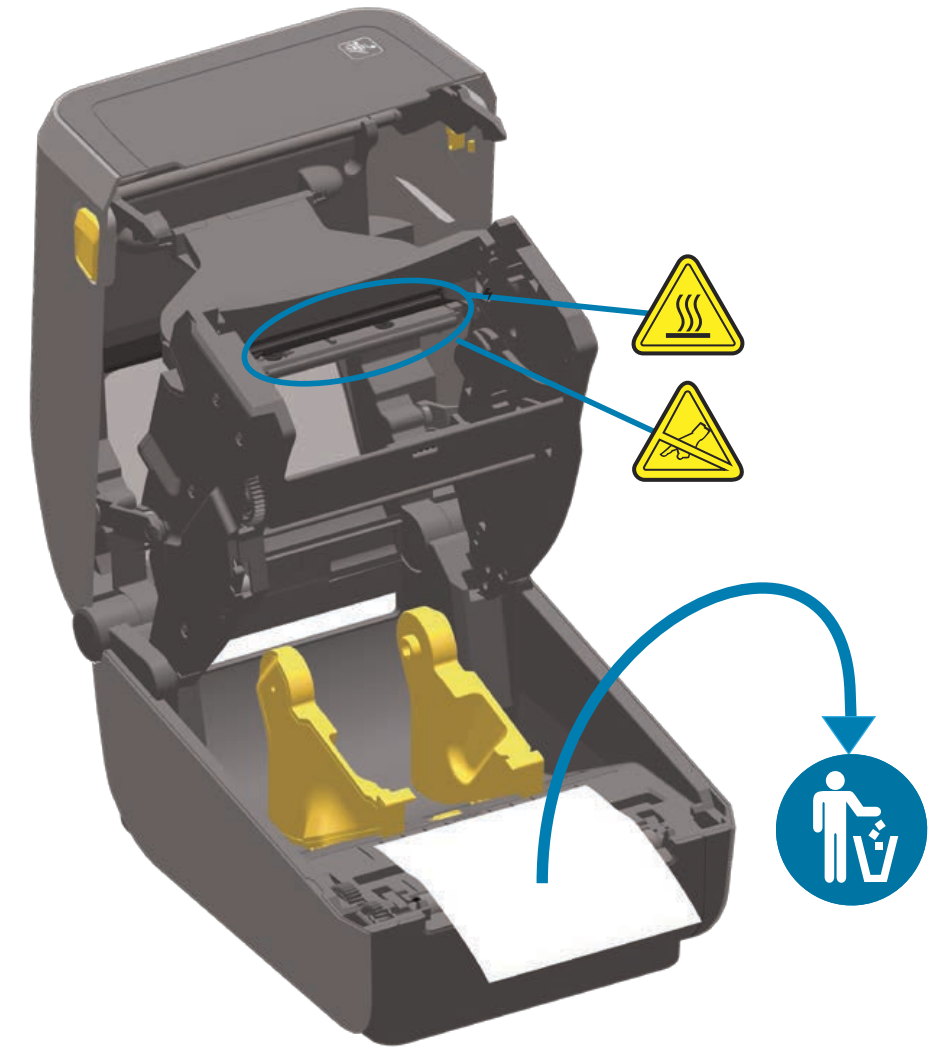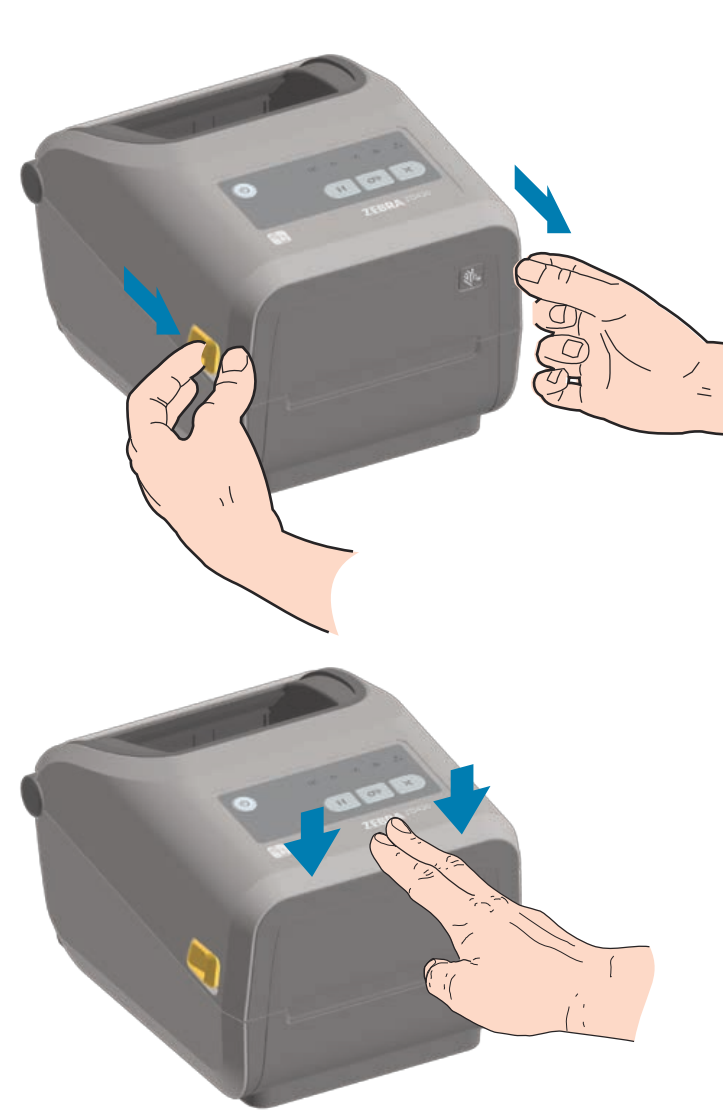


1

www.zebra.com/setup





下载并安装 Zebra Setup Utilities
包括 Windows 打印机驱动程序

2

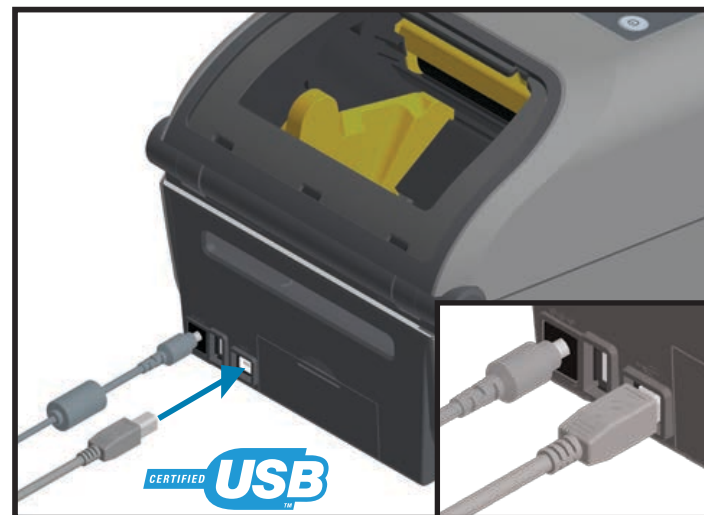

将 USB 缆线连接至打印机

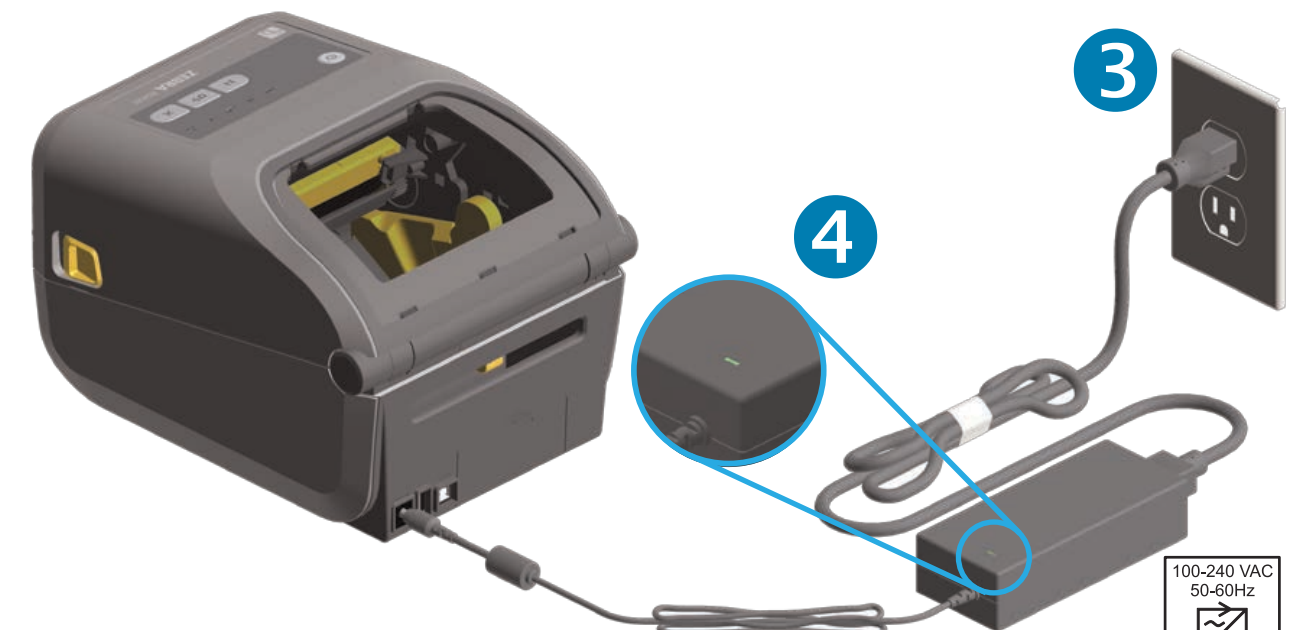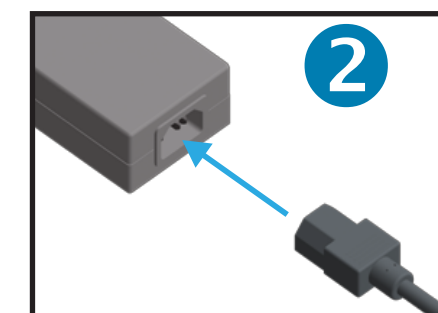

100-240 VAC
50-60Hz
24 VDC



Corporate Headquarters
+1 800 423 0442
inquiry4@zebra.com

Asia-Pacific Headquarters
+65 6858 0722
contact.apac@zebra.com

EMEA Headquarters
zebra.com/locations
mseurope@zebra.com

Latin America Headquarters
+1 847 955 2283
la.contactme@zebra.com

<http://www.zebra.com/locations>

©2016 ZIH Corp. and/or its affiliates. All rights reserved. Zebra and the stylized Zebra head are trademarks of ZIH Corp., registered in many jurisdictions worldwide. All other trademarks are the property of their respective owners.

Printed In China



212496-061