


WORKFORCE CONNECT

Voice Client 9.x



ZEBRA

Configuration Guide for Rauland

Copyright

ZEBRA and the stylized Zebra head are trademarks of Zebra Technologies Corporation, registered in many jurisdictions worldwide. All other trademarks are the property of their respective owners. ©2019 Zebra Technologies Corporation and/or its affiliates. All rights reserved.

COPYRIGHTS & TRADEMARKS: For complete copyright and trademark information, go to www.zebra.com/copyright.

WARRANTY: For complete warranty information, go to www.zebra.com/warranty.

END USER LICENSE AGREEMENT: For complete EULA information, go to www.zebra.com/eula.

Terms of Use

Proprietary Statement

This manual contains proprietary information of Zebra Technologies Corporation and its subsidiaries ("Zebra Technologies"). It is intended solely for the information and use of parties operating and maintaining the equipment described herein. Such proprietary information may not be used, reproduced, or disclosed to any other parties for any other purpose without the express, written permission of Zebra Technologies.

Product Improvements

Continuous improvement of products is a policy of Zebra Technologies. All specifications and designs are subject to change without notice.

Liability Disclaimer

Zebra Technologies takes steps to ensure that its published Engineering specifications and manuals are correct; however, errors do occur. Zebra Technologies reserves the right to correct any such errors and disclaims liability resulting therefrom.

Limitation of Liability

In no event shall Zebra Technologies or anyone else involved in the creation, production, or delivery of the accompanying product (including hardware and software) be liable for any damages whatsoever (including, without limitation, consequential damages including loss of business profits, business interruption, or loss of business information) arising out of the use of, the results of use of, or inability to use such product, even if Zebra Technologies has been advised of the possibility of such damages. Some jurisdictions do not allow the exclusion or limitation of incidental or consequential damages, so the above limitation or exclusion may not apply to you.

Introduction

The Workforce Connect Voice Client (WFC Voice) version 9.x supports a Distinctive Ringtone feature that works with Rauland Borg Responder 5 (RB/R5) ringtone identifiers in the SIP INVITE message **From** header.

The RB/R5 PBX provides a way to set specific ringtone types in response to event inputs. An event input is interpreted within the RB/R5 PBX, which then sends a SIP INVITE to appropriate client targets. The header of the invite contains specific identifiers of the ringtone or urgency.

The Distinctive Ringtone feature is configured in the WFC Voice by assigning a ringtone to an event from RB/R5. The WFC Voice interprets the **From** header in an incoming SIP call and plays the assigned ringtone. When there are multiple incoming calls, the WFC Voice interprets urgency and prioritizes the calls.

The WFC Voice configuration must exactly match the RB/R5 configuration to function correctly. If the **From** header of the incoming SIP INVITE does not match the WFC Voice identifier, the WFC Voice plays a configurable default ringtone.

Requirements

- WFC Voice version 9.x installed and activated. Refer to the WFC Voice Client 9.x Administration Guide for any PBX.
- RB/R5 PBX properly configured. For information, contact Rauland Borg customer support.

Configure the Workforce Connect Voice Client

Obtain the following information from the RB/R5 PBX before configuring the WFC Voice:

- Server IP address
- Server port
- Server Transport (TCP/UDP)
- User ID
- Password.

To configure the WFC Voice:


1. Touch  > **Settings**.
2. Enter the settings password. The default password is: **zamboni**.
3. Touch **Connection Parameters**.
4. Select a PBX configuration. The typical configuration for RB/R5 is: **PBX#2 Configuration**.
5. Touch the **PBX Type** field and select **Rauland**.
6. Enter the **User ID**.
7. Enter the **Password**.
8. Enter the **SIP transport**.
9. Enter the **Server address**.
10. Enter the **Server port number**.

Figure 1 Enter Parameters

← PBX#1 Configuration

PBX#2 Type
Rauland

PBX Line Logo

SIP ID
Enter SIP ID

User ID
2909

Password

SIP transport
UDP

Device MAC
Enter Device MAC

Server Address
10.80.212.92

Server Address2

Server Address3

Server port number
5060

11. Touch the back button three times to return to WFC Voice home screen.
A confirmation that the Configuration has been saved to WFCConnect.xml displays.

Assign a Distinctive Ringtone

To assign a distinctive ringtone:

1. From the WFC Voice, touch the menu button.
2. Touch **Settings > Advanced Settings > Ringtones > Rauland Alerts**.

Figure 2 Rauland Alerts

← Rauland Alerts

Tones

CODE

HIGH

MEDIUM

LOW

Patterns

Pattern CODE


Pattern HIGH

Pattern MEDIUM

Pattern LOW

3. Touch an alert priority to select it.
4. Select a ringtone.

Figure 3 Select Ringtone

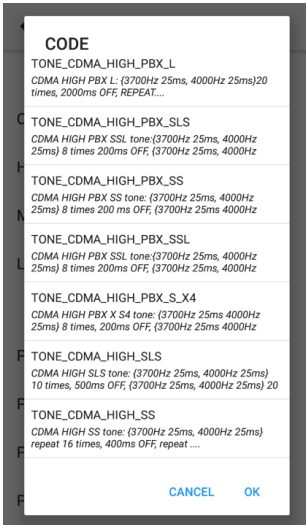

5. Select **OK**.
6. Touch the back button three times to return to WFC Voice home screen.

SIP INVITE Messages

This section contains examples of RB/R5 SIP INVITE messages.

Example One

```
INVITE sip:1637@10.198.6.27:44066;ob SIP/2.0
Via: SIP/2.0/UDP 172.25.215.175:5060;branch=z9hG4bK2c9356cb
Max-Forwards: 70
From: "FBC_430_1 Patient"
<sip:499*430*1@172.25.215.175>;tag=as761437ff
To: <sip:1637@10.198.6.27:44066;ob>
Contact: <sip:499*430*1@172.25.215.175:5060>
Call-ID: 5b43f5e2087b044574f9a51725e9f4e9@172.25.215.175:5060
CSeq: 102 INVITE
User-Agent: Asterisk PBX 14.2.1
Date: Fri, 28 Apr 2017 17:07:06 GMT
Allow: INVITE, ACK, CANCEL, OPTIONS, BYE, REFER, SUBSCRIBE, NOTIFY, INFO, PUBLISH, MESSAGE
Supported: replaces, timer
Alert-Info: <ftp://localhost/SIoeDingDong.ogg>
Content-Type: application/sdp
Content-Length: 290
```

Example Two

```
INVITE sip:1637@10.198.6.27:44066;ob SIP/2.0
Via: SIP/2.0/UDP 172.25.215.175:5060;branch=z9hG4bK2c9356cb
Max-Forwards: 70
From: "FBC_430_1 WFC_ALERT_TONE_12"
<sip:499*430*1@172.25.215.175>;tag=as761437ff
To: <sip:1637@10.198.6.27:44066;ob>
Contact: <sip:499*430*1@172.25.215.175:5060>
Call-ID: 5b43f5e2087b044574f9a51725e9f4e9@172.25.215.175:5060
CSeq: 102 INVITE
User-Agent: Asterisk PBX 14.2.1
Date: Fri, 28 Apr 2017 17:07:06 GMT
Allow: INVITE, ACK, CANCEL, OPTIONS, BYE, REFER, SUBSCRIBE, NOTIFY, INFO, PUBLISH, MESSAGE
Supported: replaces, timer
Alert-Info: <ftp://localhost/SIoeDingDong.ogg>
Content-Type: application/sdp
Content-Length: 290
```

WFC Voice Configuration File

Using the Distinctive Ringtone feature requires storing the following as key and value pairs in the WFC Voice configuration file. Each key and value pair contains the following:

- WFC Voice ringtone priority parameter. The ringtone priorities are: low, medium, high, medium pattern, code pattern, code, low pattern.
- One or more RB/R5 ringtone identifiers. Ringtone identifiers must exactly match the content of the SIP INVITE message From header.

The format is `<ringtone_priority>From Header</ringtone_priority>`.

Configuration File Example

In the example below, the ringtone priority parameters contain headers from the [SIP INVITE Messages on page 6](#).

- The parameter `<rauland_low_pattern>` contains the From header **Patient**, highlighted in [Example One](#).
- The parameter `<rauland_high_pattern>` contains the From header **WFC_ALERT_TONE_12**, highlighted in [Example Two](#).

```
<WFCconnect>
  <Profile>
    <profile_type>Rauland</profile_type>
    <rauland_low>TONE_CDMA_ALERT_CALL_GUARD</rauland_low>
    <rauland_medium>TONE_CDMA_EMERGENCY_RINGBACK</rauland_medium>
    <rauland_high>TONE_CDMA_INTERCEPT</rauland_high>
    <rauland_medium_pattern>Shower, Need Toilet, Patient OT, In Pain, Need NA OT, Need RN
    OT, Toilet, Transfr Arrived, Surg Admit, EC Admit, Direct Admit, Return To Rm, Lab IV
    Help, Assistance Needed, IV Beep, Provider in Rm</rauland_medium_pattern>
    <rauland_code_pattern>Code Blue, NICU Code, Code C Birth</rauland_code_pattern>
    <rauland_high_pattern>Alarm, Toilet Pull Cord, FBC, Staff Assist, Shower OT, Toilet OT, Lift
    Help, Bari Lift, Tub, WFC_ALERT_TONE_12</rauland_high_pattern>
    <rauland_code>TONE_CDMA_HIGH_SS</rauland_code>
    <rauland_low_pattern>Alarm 2, Cord Out, Bed Out, Alarm 2, Patient, Water, Turn Q2, PAIN 45 Min, CARE
    Rounds 1 HR, NA 45 Min, NA 30 Min, NA 15 Min, CARE Rounds NA, Nurse 45 Min, Nurse 30 Min, Nurse 15
    Min, CARE Rounds Nurse</rauland_low_pattern>
    ...
  </Profile>
</WFCconnect>
```

